

ASSEMBLY & INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and national electrical code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instruction.

ASSEMBLY AND INSTALLATION

1. Turn off the power.
2. Take the acrylic lens (20) out from the fixture pan (11) by turning the four clips(9) outward.
3. Pull the supply wires (4)&(6)and house ground wire (2) out from the outlet box (1).
4. Make the wiring connections: connect the house ground wire (2) to the fixture ground wire(3); connect the white supply wire (4) to the white (or ribbed) fixture wire (5); connect black supply wire (6) to the black (or smooth) fixture wire (8) using wire connectors (7). Thread one of the fixture screws (15) two full turns into the threaded hole on the outlet box (1) . Carefully tuck all wires back into the outlet box (1).
5. Locate the fixture pan(11) over the outlet box (1), positioning the fixture screw(15) through the large opening of the key hole slot and then twist to the narrow opening of the key hole slot. Put the other fixture screw through the long hole slot on the fixture pan and thread into the outlet box.

Then secure the fixture pan(11) to the outlet box by tightening the two fixture screws.

6. Take the lamps out from the cardboard.The ballast is designated for use with 32W and 40W circline lamps. Connect the 32W circline lamp(18) first, then follow the same instruction to connect the 40W circline lamp(19).Attach one of the ballast receptacle (13)to the 32W lamp connector(16).Attach the 32W circline lamp(18) to the fixture pan(11) by pulling a lamp bracket(12) backward and inserting the 32W circline lamp. Pull back the remaining lamp brackets(12) and insert the 32W circline lamp.
7. Secure the acrylic lens to the fixture pan by turning the 4 clips (9) inward.

INSTALLATION IS NOW COMPLETED

To replace Ballast:

Ballast replacement, if required, to be completed by a qualified electrician.

Fig.1


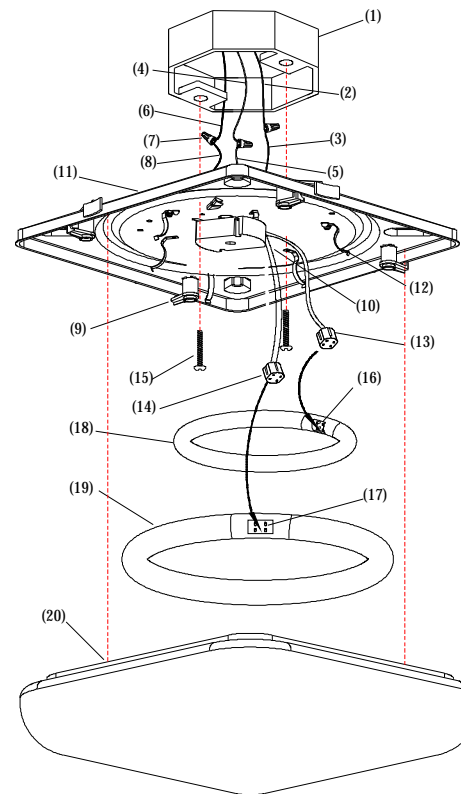


Fig.2

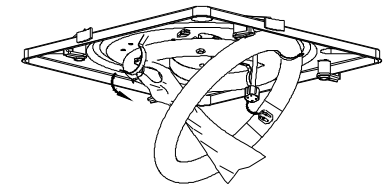

- 1.OUTLET BOX
- 2.HOUSE GROUND WIRE
- 3.FIXTURE GROUND WIRE
- 4.WHITE SUPPLY WIRE
- 5.WHITE FIXTURE WIRE
- 6.BLACK SUPPLY WIRE
- 7.WIRE CONNECTOR
- 8.BLACK FIXTURE WIRE
- 9. CLIP
- 10. ELECTRONIC BALLAST
- 11.FIXTURE PAN
- 12.LAMP BRACKET
- 13.BALLAST RECEPTACLE
- 14.BALLAST RECEPTACLE
- 15.FIXTURE SCREW
- 16.32W LAMP CONNECTOR
- 17.40W LAMP CONNECTOR
- 18.32W CIRCLINE LAMP
- 19.40W CIRCLINE LAMP
- 20.ACRYLIC LENS