



## GENERAL

**MP20RA** Surface mounting plate (Reversed) available for installations requiring additional support. Can be secured to a variety of load-bearing surfaces. Installation instructions included with unit.

**MP20RA** Surface mounting plate (Reversed) is available as an optional accessory for two-level Square Front models **EDFPA17RAC** or Soft Sides<sup>®</sup> models **EDFP217RAC** or SwirlFlo<sup>®</sup> fountain model **EDFPBM117RAC**.

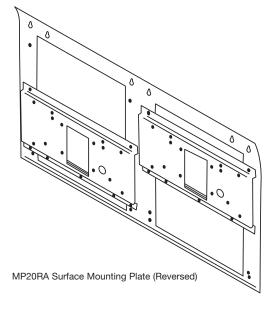

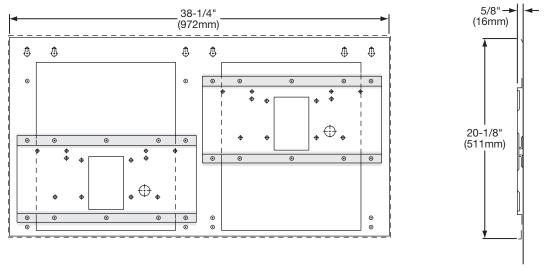


FRONT VIEW

SIDE VIEW

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

2222 Camden Court Oak Brook, IL 60523



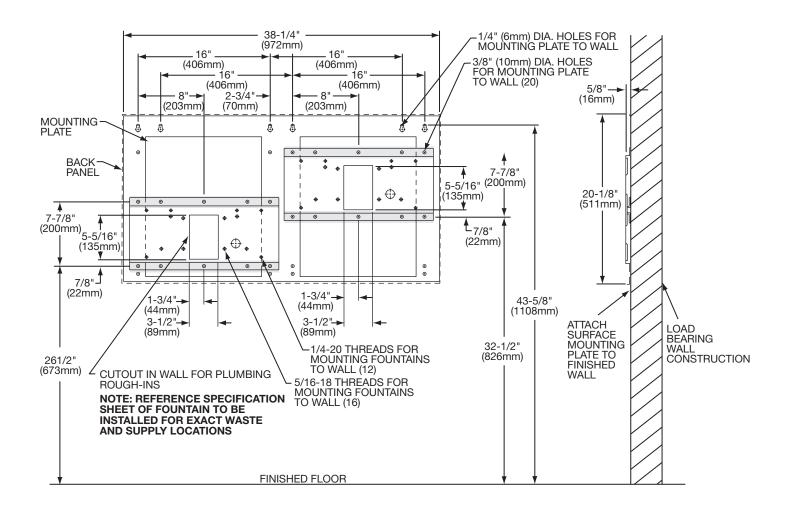

## MP20RA MOUNTING PLATE INSTRUCTIONS

- **1.** Remove mounting plate from packaging. Read this instruction sheet before proceeding. These dimensions are required to obtain proper rim and bubbler heights for compliance with ANSI standard A117.1.
- **2. Install plumbing rough-ins** as per fountain instructions (supplied with fountain).

**NOTE:** Reference specification sheet of fountain to be installed for exact waste and supply locations.

- **3. Install (2) 1/4" (6mm) screws** (not provided) into wall at 43-5/8" above finished floor. Use the two best hole locations for your application. Hang mounting plate on these screws and level mounting plate before tightening screws.
- **4. Reinforce the wall in shaded areas** for framed wall construction so that it will adequately support the water fountain. This reinforcement must support up to 300 lbs. static load and provide a means for securing the mounting plate in place.
- **5. Attach mounting plate** to finished wall surface with (12) 5/16" x 2" long bolts and flat washers, 6 per bracket (not provided). Tighten securely. (Fastener must match wall type, i.e. lag screws for wood studs, bolts and anchors for masonary construction.)