

MONARCH 6938C

69" x 38" x 20"

Monarch is a refined collection of therapeutic baths with distinctive deck surfaces, for a look that's noble and pure. The Collection offers luxurious bathtubs: the Monarch Grand Luxury models, featuring splendid One-piece Quartz deck.



PRODUCT NO.

DESCRIPTION	TMU	TUB
Standard (S)*	BMOYFD00T-XX	BMOYFD00N-XX
Grand Luxury (GL)*	BMLYFD00T-XX	BMLYFD00N-XX

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	S \$	GL \$
Jets		42
1 heated backrest		Included
MiaPlus® Control (not installed)		Included
Geysair®		Included
AromaCloud®		N/A
Illuzio Chromatherapy BCHRO6		\$
2 nd heated backrest (WTS-1 zone) BSHB		\$

TUB Soaker	S \$	GL \$
AromaCloud®		N/A
Illuzio Chromatherapy BCHRO6		\$
WarmTouchShell® BWTS		\$
DOT control		Included with therapy
2 nd WarmTouchShell® BWTS2		\$

FEATURES			
Installation type		Drop-in	
No. of bathers	2	Imp. gallons	42
US gallons	50		
INTEGRATED WASTE & OVERFLOW BOVERINI-XX			
White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10		Inst. & Incl.	
STANDARD COLOR (inner shell)			
White 01		Included	
QUARTZ DECK COLOR			
S* BDMO6938C-XX		GL* BDML6938C-XX	
Grey Expo 21	Noka 22	Jet Black 23	Lagos Blue 24
Included		Included	

OPTIONS (UPCHARGE APPLICABLE)

QUARTZ DECK COLOR	S*	GL*
	BDMO6938C-XX	BDML6938C-XX
Quasar Light 25	\$	\$
Piatra Grey 26	\$	\$
Bianco Drift 31		
Woodlands 30		
Statuario Maximus 29	\$	\$
FINISH (inner shell)		
UltraVelour Matte Finish (White only) BVEL		\$
INTEGRATED WASTE & OVERFLOW BOVERINI-XX		
Matte Black 19, Black Chrome 12, Satin Brass 18		\$
WASTE & OVERFLOW 16" x 35" BOVER16-XX		
Chrome 07		\$
White 01		\$
Brushed Nickel 09, Polished Nickel 10, Oil-rubbed Bronze 11		\$
CONTROL (TMU only)		
MiaMulti® BMIAM2-XX		\$
IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED WITH ITD		
Brass waste & overflow kit** BDRCOB		\$
Brass waste kit** BDRCB		\$
16" x 35" Cable driven Brass waste & overflow kit BOVERBR-XX		\$

💡 Don't forget that this model is available in **White only with choice of deck color**. Don't forget to specify the **finish of the integrated waste & overflow**.
 * Standard: Quartz deck with seam. Grand Luxury: one piece Quartz deck.
 ** When ordered with integrated waste & overflow.

TOTAL PRICE	\$
--------------------	----




MONARCH 6938C



Statuario Maximus quartz deck

INSTALLATION

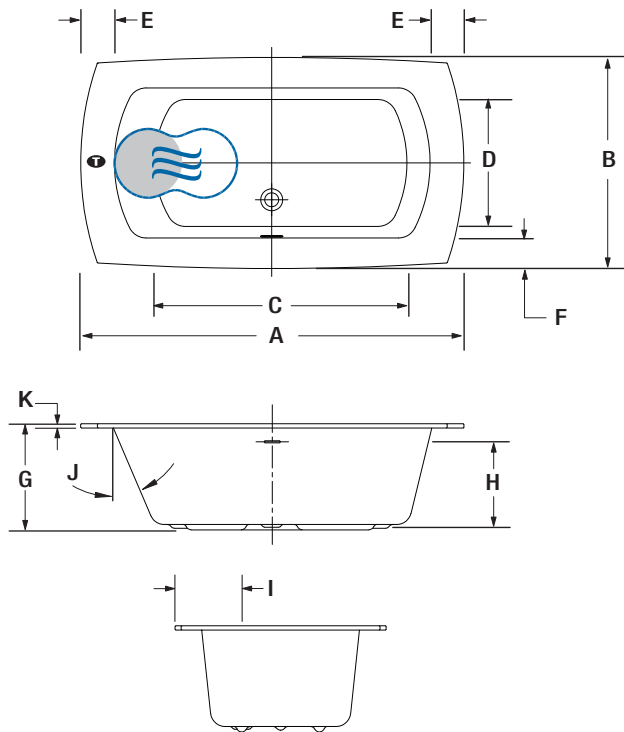

LETTER	DESCRIPTION	MEASURE
A	Total length	69"
B	Total width	38"
C	Bathing well length (at height of jets)	46 1/8"
D	Bathing well width (at height of jets)	23 1/4"
E	Deck width (edges)	6 1/4"
F	Deck width (sides)	5 5/8"
G	TUB height	19 5/8"
H	Height from waste to center of overflow	14 3/4"
I	Outside edge to center waste	12 3/8"
J	Slope of backrest	23°
K	Quartz deck height	3/4"

- T** Turbine position (TMU)
- Indicates heated backrest (TMU)
- ☞ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of TUB or greater.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI.
Other	Control cannot be installed on the Quartz deck.

Our products must be installed by certified professionals only and according to our Monarch Installation Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	262 lbs
Turbine power	550 W
Air heater	600 W
WARRANTY	
Controls-LED-Geysair*	5 years
Quartz deck*	15 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.