
## **SCALA** 7242

72" x 42" x 25" (FREESTANDING)

Scala, this freestanding bath has an aesthetic refinement that translates into a contemporary version of the Rococo style bathtub on lion's feet.

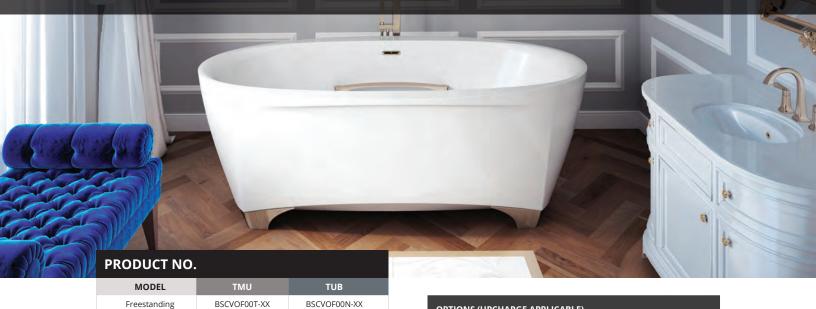

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	41
1 heated backrest & headrest	Included
MiaMulti® Control*	Included
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$

Freestanding

2<sup>nd</sup> heated backrest (WTS-1 zone) BSHB

<b>TUB</b> Soaker	\$
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy
2 <sup>nd</sup> WarmTouchShell® BWTS2	\$

FEATURES				
Installation type	Installation type		F	reestanding
No. of bathers	* *	Imp. gallo	ns	63
US gallons	76			
INTEGRATED WASTE 8	OVERFLO	W BOVERINI-	κx	
White 01, Chrome 07, Brus Polished Nickel 10	shed Nickel 0	9,	Installe	d & Included
FEET (specify finish) BFEETSC-XX				
Chrome 07, Brushed Nick	el 09, Polishe	ed Nickel 10	Installe	d & Included
STANDARD COLOR				
White 01				Included

OPTIONS (UPCHARGE APPLICABLE)		
FINISH		
UltraVelour Matte Finish (White only) BVEL	\$	
ARMRESTS (2) BGBSC-XX		
Chrome 07, Brushed Nickel 09, Polished Nickel 10	\$	
Matte Black 19, Black Chrome 12, Satin Brass 18	\$	
INTEGRATED WASTE & OVERFLOW BOVERINI-XX		
Matte Black 19, Black Chrome 12, Satin Brass 18	\$	
FEET (specify finish) BFEETSC-XX		
Matte Black 19, Black Chrome 12, Satin Brass 18	\$	
ISLAND TUB DRAIN™**		
Island Tub Drain™ BISLDD	\$	
Cast Iron Island Tub Drain™ BISLDDCI	\$	
IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED WITH ITD		
Brass waste & overflow kit BDRCOB	\$	
Brass waste kit BDRCB	\$	

Don't forget that this model is available in **White only**. Don't forget to specify the **finish of the integrated waste & overflow, feet and armrests**.

\* Control and faucet cannot be installed on the deck of the bath.


\*\* An Island Tub Drain™ is required when there is **no access under the bath**.

TOTAL PRICE











## SCALA 7242 (FREESTANDING)



## INSTALLATION





LETTER	DESCRIPTION	MEASURE
Α	Total length	72"
В	Total width	42"
С	Bathing well length	50"
D	Bathing well width	26 1/2"
E	Deck width at sides	4 1/8"
F	Deck width at ends	1/2"
G	Center waste to air intake	3 5/8"
Н	Total height to headrest	25"
I	Maximum water level	17 1/2"
J	Base length	54 3/8"
K	Base width	24 1/8"
L	Slope of backrest	27°

- Indicates heated backrest (TMU)
- Indicates WarmTouchShell® position (TUB)

Hot water supply required	Should be 70% of water capacity of TUB or greater.
Turbine	Access to the pump must be at least 18" x 22". <b>Standard connection is</b> dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any accessed line is needed 15. A 170 K 60 by dedicated line with a GFCI.

s 20 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary:

Faucet must be freestanding or wall-mounted.
The turbine must be remotely installed. Others

- TMU: Control must be wall-mounted. - TUB: DOT control will be installed on TUB.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Cutting template	# 90000076
Approx. shipping weight	300 lbs
Turbine power	550 W
Air heater	600 W
WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

<sup>\*</sup> Some restrictions apply | www.bainultra.com/warranty





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.