TOTO MS854114E(G)/MS853113E

Eco UltraMax® One-Piece Toilet, 1.28GPF

FEATURES

- E-Max® flushing system, low consumption (1.28GPF/4.8LPF)
- Optional SanaGloss® ceramic glaze SanaGloss glaze prevents debris, and mold from sticking to ceramic surfaces, leading to fewer chemicals.
- One-piece decorative toilet with high-profile tank
- Elongated front bowl with SoftClose® seat (SS114) or round front bowl with SoftClose® seat (SS113)
- 12" Rough-in
- Chrome trip lever

MODELS

- MS854114EG
 Elongated bowl with SanaGloss and SoftClose seat (SS114)
- MS854114E Elongated bowl with SoftClose seat (SS114)
- MS853113E Round bowl with SoftClose seat (SS113)

COLORS/FINISHES

Standard
 #01 Cotton
 #03 Bone
 #11 Colonial White
 #12 Sedona Beige

PRODUCT SPECIFICATION

The one-piece low consumption E-Max flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall be of elongated front bowl (MS854) or round front bowl (MS853) with a high-profile tank and SoftClose seat. Toilet shall have optional SanaGloss ceramic glaze. Toilet shall have chrome trip lever. Toilet shall be TOTO Model MS85



SanaGloss



CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance





Eco UltraMax® One-Piece Toilet, 1.28GPF

SPECIFICATIONS

• Water Use 1.28 GPF/4.8 LPF

Flush System E-Max®
 Min. Water Pressure 8 psi (static)
 Water Surface 10-1/4" x 8-1/4"

Trap Diameter 2-1/8"Rough-in 12"Trap Seal 2-3/8"

• Warranty One Year Limited Warranty

• Material Vitreous china

Shipping Weight MS854114E(G) 93 lbs.
 MS853113E 91 lbs.


Shipping Dimensions 30-3/4" L x 18-1/8"W


x 27-1/8" H


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

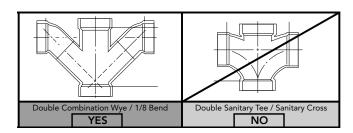

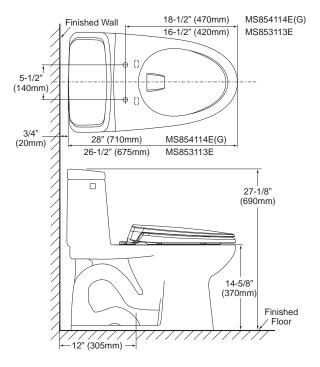



TOTO:

These dimensions and specifications are subject to change without notice