

# **SPECIFICATIONS**

## TWO HANDLE THERMOSTATIC SHOWER VALVE WITH TRIM

## Description

- 1/2" combination IPS/Copper sweat on all three ports
- · 3-port shower valve with stops
- With temperature limit adjustment

#### Flow & Valving

See Chart

### **Standards**

- ASME A112.18.1
- CSA B125
- ASSE 1016
- Listed IAPMO/UPC
- Energy policy act of 1992
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms 🔈

## Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



D560157 OPULENCE™

#### **Available Colors & Finish**

- Chrome
- Antique Copper (AC) Brushed Nickel (BN)
- Satin Black (BS)
- Polished Brass (PBV)
- Polished Nickel (PNV)
- Oil Rub Bronze (RB)


Trim Kit : (for use w/thermostatic shower valve) D560157T

#### **Special Packaging**

• Model numbers for trim kit items include the suffix "T".

#### FLOW RATE CHART GPM 20 15 10 5 20 40 60 80 PSI 0

j.

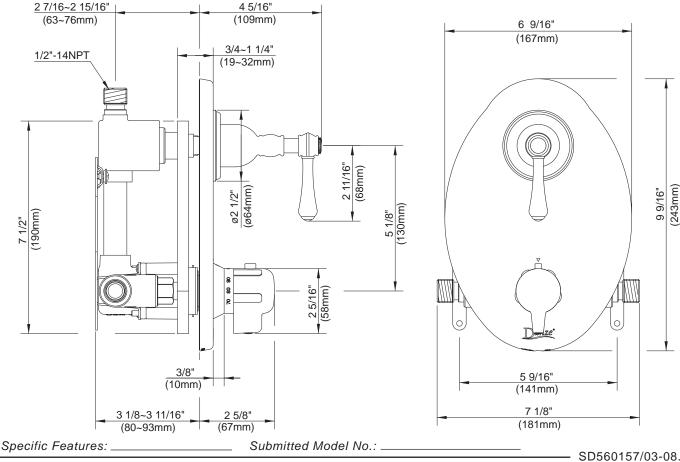

Danze, Inc., 2500 Internationale Parkway, Woodridge, IL 60517, USA WWW.DANZE.COM