TOTO®

TS220D

Vivian® Two-Way Diverter Trim with Off, Cross Handle

FEATURES

- Cross handle
- Integrated off position
- For use with the Two-Way Diverter Valve with Off (TSMV)

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others

PRODUCT SPECIFICATION

Two-way diverter trim with off shall be TOTO Model TS220D#____ and required valve shall be TSMV sold separately.

TS220D

Vivian® Two-Way Diverter Trim with Off, Cross Handle
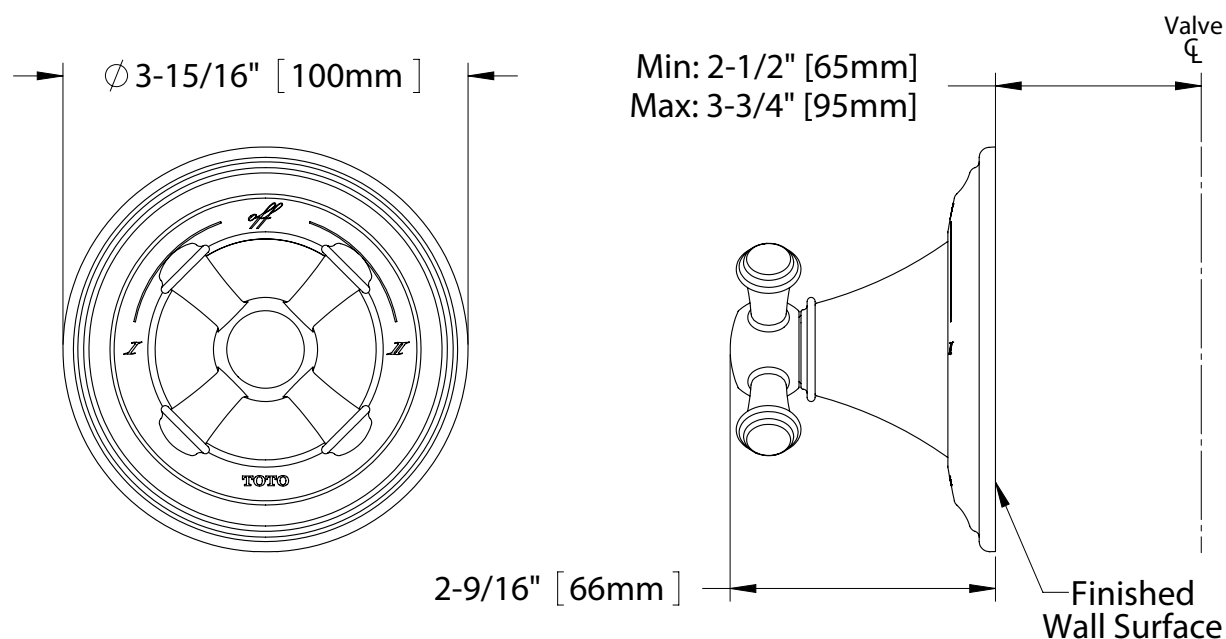
SPECIFICATIONS

- Warranty   Lifetime Limited Warranty (Residential Use)
  One Year (Commercial Use)
- Material   Brass
- Shipping Weight   1.6 lbs.
- Shipping Dimensions   7"L x 3-1/2"W x 4"H

INSTALLATION NOTES

VALVE REQUIRED:
Two-way diverter valve with off model TSMV sold separately.

⌀ 3-15/16" [100mm]

Min: 2-1/2" [65mm]
Max: 3-3/4" [95mm]

Valve ℄

2-9/16" [66mm]

Finished
Wall Surface

TOTO®

TOTO®

TS220D1

Vivian® Two-Way Diverter Trim with Off, Lever Handle

FEATURES

- Lever handle
- Integrated off position
- For use with the Two-Way Diverter Valve with Off (TSMV)

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant

PRODUCT SPECIFICATION

Two-way diverter trim with off shall have a lever handle. Product shall be TOTO Model TS220D1#_____ and required valve shall be TSMV sold separately.

TS220D1

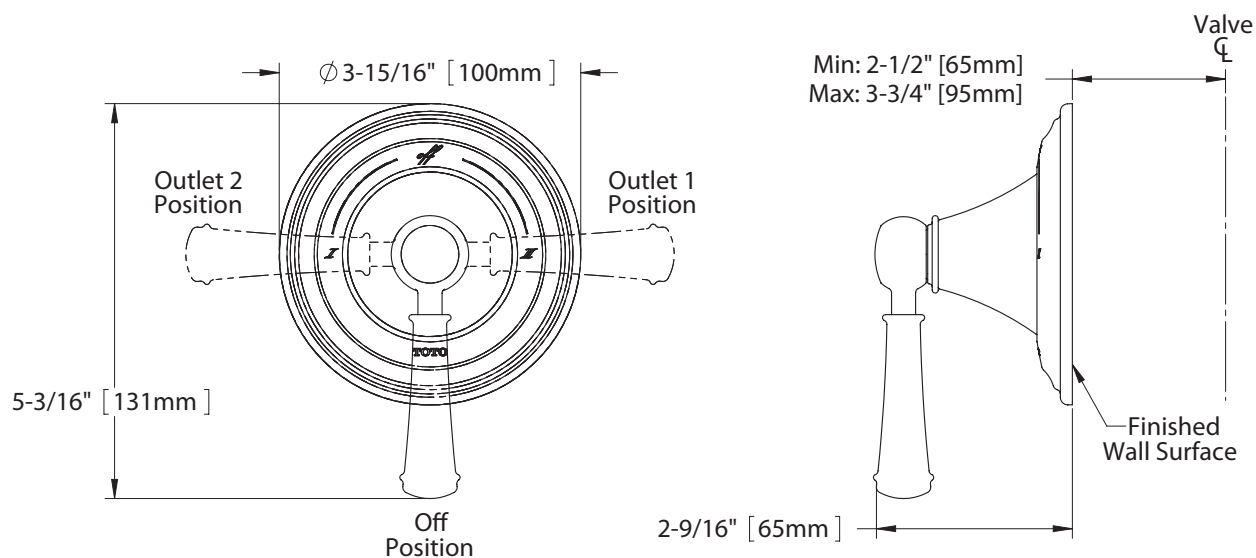## Vivian® Two-Way Diverter Trim with Off, Lever Handle

SPECIFICATIONS

- Warranty
  Lifetime Limited Warranty (Residential Use)
  One Year (Commercial Use)
- Material
  Brass
- Shipping Weight
  1.6 lbs.
- Shipping Dimensions
  7"L x 3-1/2"W x 4"H

INSTALLATION NOTES

VALVE REQUIRED:
Two-way diverter valve with off model TSMV sold separately.

⌀ 3-15/16" [100mm]

Outlet 2 Position

Outlet 1 Position

5-3/16" [131mm]

Off Position

Min: 2-1/2" [65mm]
Max: 3-3/4" [95mm]

Valve CL

Finished Wall Surface

2-9/16" [65mm]

TOTO®