- Assemble mounting screws to backpan using hexnut.
- At the center of the backpan are knockout slots. Remove the set that matches your outlet box.
- Secure the backpan to the outlet box.
- Anchor the backpan to the wall using the set of holes at each end of fixture using wood screws, toggle bolts, plastic anchors, etc.
- TURN OFF POWER.

**IMPORTANT:** Before you start, NEVER attempt any work without shutting off the electricity until the work is done.

- Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.

  Unscrew the fuse(s), or switch "OFF" the circuit breaker switch(s),
- b) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position. If the fixture to be c) replaced has a switch or pull chain, place those in the "OFF" position.
- Connect fixture ground wire to outlet box ground wire with wire connector. Never connect ground wire to black or white power supply wire.
- Make wire connections (connectors not provided). Reference chart below for correct connections and wire accordingly.


| Connect Black or<br>Red Supply Wire to:   | Connect<br>White Supply Wire to:                           |
|---|--|
| Black   | White  |
| *Parallel cord (round & smooth)   | *Parallel cord (square & ridged)                           |
| Clear, Brown, Gold or Black<br>without tracer   | Clear, Brown, Gold or Black<br>with tracer                 |
| Insulated wire (other than green) with copper conductor   | Insulated wire (other than green)<br>with silver conductor |
| *Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in |  |

- Neutral Wire 8) Carefully push wire connections back into outlet box making sure all connections remain secure.
- Slip faceplate over mounting screws and backpan. NOTE: Be certain wires do not get pinched between backpan and faceplate.
- 10) Secure faceplate to backpan using threaded balls.
- 11) Insert recommended bulb. Carefully push bulb into bulb support clip.
- 12) Lower glass down over socket.

shape or smooth (see illus.)

## **INSTRUCTIONS**

For Assembling and Installing Fixtures in Canada Pour L'assemblage et L'installation Au Canada

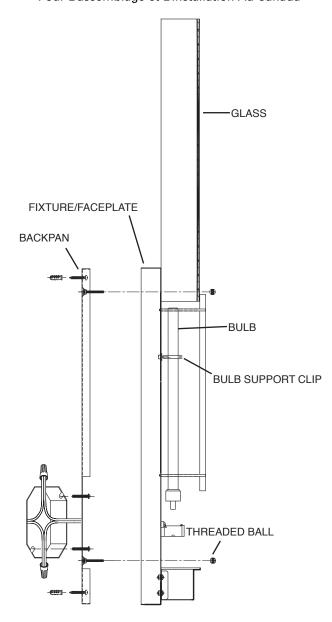

Date Issued: 8/12/11 IS-10448-CB