

SPECIFICATIONS

AERATOR KIT 1.0 GPM

Description

- Flow rate at 1.0 gallon per minute
- Spray flow pattern
- Female or male thread available
- Insert provided by Neoperl (see the number in brackets below)
- Pressure compensating between 20 psi and 80 psi
- Rolling printed "A112.18.1M, 1.0 GPM / 3.8 LPM Max"

Standards

MEETS ASME
A112.18.1M

- ASME A112.18.1M


Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Model Numbers:



DA500198N (A5.9036.10000)	1.0 GPM, junior, male, spray, no wrench included
DA500216N (A5.9046.1)	1.0 GPM, standard, female, spray, no wrench included
DA613074N (A5.9036.10000)	1.0 GPM, junior, male, spray
DA613082N (A5.9046.1)	1.0 GPM, standard, male, spray
DA500201N (A5.9036.10000)	1.0 GPM, junior, male, spray, no wrench included
DA500227N (A5.9046.1)	1.0 GPM, standard, female, spray, no wrench included
DA500229N (44.7158.0.0001)	1.0 GPM, tom thumb, female, spray, no wrench included
DA613094N (44.7158.0.0001)	1.0 GPM, tom thumb, male, spray
DA613078N (44.7158.0.0001)	1.0 GPM, tom thumb, male, spray
DA500228N (A5.9046.1)	1.0 GPM, standard, male, spray, no wrench included

Flow Rate

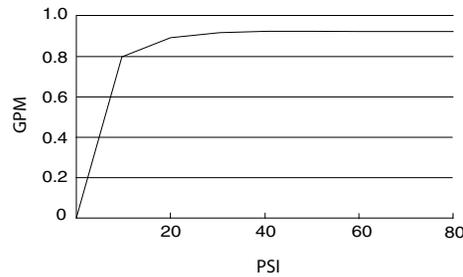

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

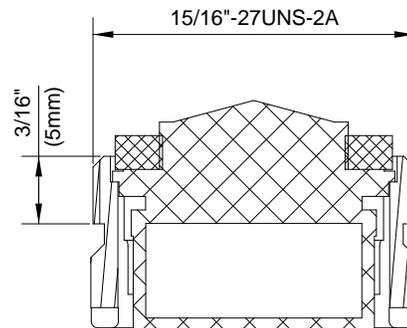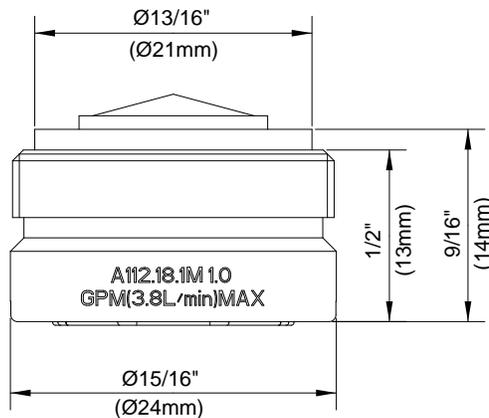

Submittal Information:

Job Name: _____
Contractor: _____

Location: _____
Contact #: _____