

Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0/1.28/1.6 GPF

FEATURES

- Wall-mounted
- Elongated front bowl
- Optional CeFiONtect™ glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- Clear glazed trapway coating

MODELS

- CT708U
Commercial wall-mounted toilet with 1-1/2' top spud inlet, less seat
- CT708UG
Commercial wall-mounted toilet with 1-1/2' top spud inlet, less seat with CeFiONtect ceramic glaze

ADDITIONAL ITEMS

- SC534 seat
- SC134 seat
- THU111 Retro-fit mounting bolt cap set (4 pcs)

| FLUSH VALVES | | | |
|---------------------|----------|-------------|----------|
| ECOPOWER® | | MANUAL | |
| Exposed | | Exposed | |
| TET1UA32#CP | 1.0 GPF | TMT1LN32#CP | 1.28 GPF |
| TET1LA32#CP | 1.28 GPF | TMT1NNC-32 | 1.6 GPF |
| TET1GA32#CP | 1.6 GPF | | |
| Exposed 24" Breaker | | | |
| TET6UA32#CP | 1.0 GPF | | |
| TET6LA32#CP | 1.28 GPF | | |
| TET6GA32#CP | 1.6 GPF | | |
| Concealed 14" x 12" | | | |
| TET2UA32#CP | 1.0 GPF | | |
| TET2LA32#SS | 1.28 GPF | | |
| TET2GA32#SS | 1.6 GPF | | |
| Concealed 4" x 4" | | | |
| TET3UA32#SS | 1.0 GPF | | |
| TET3LA32#SS | 1.28 GPF | | |
| TET3GA32#SS | 1.6 GPF | | |



Flush valve sold separately



COLORS/FINISHES

- Standard
#01 Cotton

PRODUCT SPECIFICATION

The wall-mounted, low consumption siphon jet flushing toilet shall be 1.0, 1.28, or 1.6 GPF (3.8, 4.8, or 6.0 LPF) when paired with a flush valve of corresponding flush volume. Toilet shall have optional CeFiONtect ceramic glaze. Toilet can be mounted at ADA height. Toilet shall be TOTO Model CT708U_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant



CT708U(G)

Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0/1.28/1.6 GPF


SPECIFICATIONS

| | |
|----------------------------|---|
| Water Use | 1.0/1.28/1.6 GPF (3.8/4.8/6.0 LPF) |
| Flush System | Siphon Jet Flushing Action |
| Water Surface | 12" x 9-1/4" |
| Water Pressure | Min: 35 psi (Flowing) Max: 80 psi (Static) |
| Min. Flow Rate | 24 GPM |
| Trap Diameter | 2-1/8" |
| Trap Seal | 2-5/8" |
| Material | Vitreous China |
| Warranty | One Year Limited Warranty |
| Shipping Weight | 56 lbs |
| Shipping Dimensions | 26-1/4" L x 15-5/8" W x 16" H |

INSTALLATION NOTES

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073R

DIMENSIONS

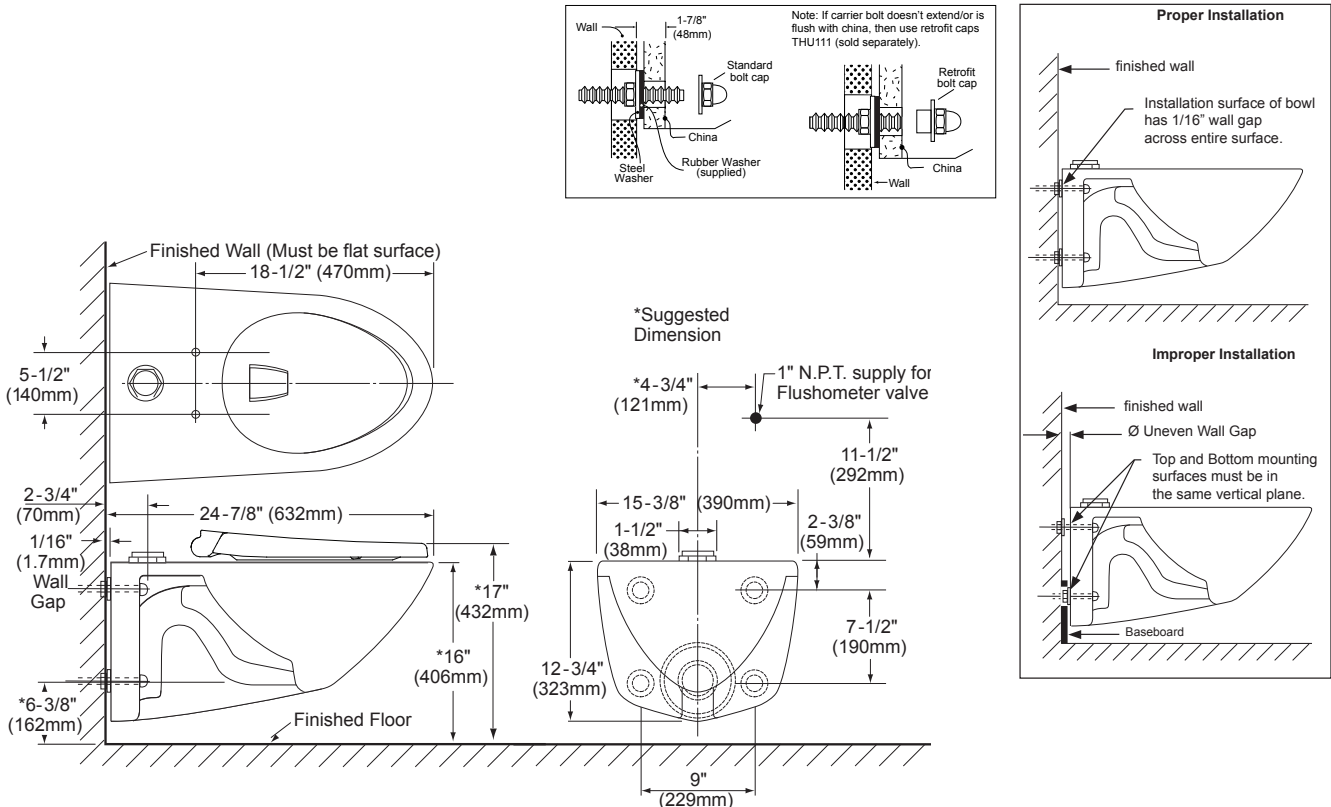

TOTO

These dimensions and specifications are subject to change without notice