66 x 36 x 23 3/4

WHIRLPOOL LEFT DRAIN MODEL #W6636ISL WHIRLPOOL RIGHT DRAIN MODEL #W6636ISR AIR-WHIRLPOOL LEFT DRAIN MODEL #W31LUX6636ISL AIR-WHIRLPOOL RIGHT DRAIN MODEL #W31LUX6636ISR



FEATURES -

- Integral skirt with removable access panels
- Integral tile flange
- Deep, ergonomic bathing well
- Sculpted armrests
- Bolt-on grab bars (chrome or color matched)
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty

AVAILABLE SYSTEMS

WHIRLPOOL 🔄

- Electronic control
- 7 hydrotherapy jets
 - 3-jet back, shoulder and neck massage system (dual port, spinning)
 - Leg and foot jets
- Whirlpool pump

AIR-WHIRLPOOL COMBINATION 56



- Whirlpool system, plus:
- Perimeter air system
- Variable speed heated-air blower with purge and dry cycle
- Electronic wave and pulse modes
- 1.5kW inline maintenance heater



AQUATIC The bath people

SANTA CRUZ

66 x 36 x 23 3/4

ВА	SE MODEL	PKG. WT. LBS.	JETS	DRAIN	MODEL #	MSLP
	Whirlpool	153	7	Left	W6636ISL	\$4,635
	Whirlpool	153	7	Right	W6636ISR	\$4,635
	Air-Whirlpool	292	7	Left	W31LUX6636ISL	\$6,197
	Air-Whirlpool	292	7	Right	W31LUX6636ISR	\$6,197



OPTIONS (x = insert desired option code)	ENTER DESIRED OPTION CODE	MSLP
Cast acrylic stock color (COLxx): Biscuit (BI) White (WH)		No charge
Cast acrylic color upgrade (COLxx): Biscuit (BI)		\$35
Metallic trim finish: Chrome (MTCH)		\$315
Metallic trim finish (MTxx): Polished Brass (BR) Brushed Nickel (SN)		\$390
Bolt-on grab bars (2) (BOGBxxx): Chrome (SS2) White (WH2) Biscuit (B12)		No charge
Bolt-on grab bars (2) (BOGBxxx): Polished Brass (BR2) Brushed Nickel (SN2) Oil Rubbed Bronze (OB2)		\$250
Magnetic pillow (MPxxxxxx): White (WHPIL) Black (BKPIL)		\$105
Cable drive waste & overflow: Chrome (CDCHCD)		\$345
Cable drive waste & overflow, color-matched (CDxxxxx): Biscuit (BICD) White (WHCD)		\$390
Cable drive waste & overflow (CDxxxxx): Oil Rubbed Bronze (OBCD) Polished Brass (BRCD) Brushed Nickel (SNCD)		\$440
Chromatherapy, installed (CLM1)		\$335
Inline heater - 1.5kW, factory installed (whirlpool only) (HTH1)		\$400
Wood shipping crate (PKCR)		\$460
Rush order program* (DELQK)		\$325
Residential delivery* (DELRD)		\$205
Residential delivery with lift gate* (DELLG)		\$454
*For program terms and conditions, see page iii.		
BASE PRICE (insert MSLP of base model selected in upper table) + \$.	
OPTIONS SUB TOTAL \$	j	
ORDER TOTAL = \$	·	

ESTATE

PRODUCT FEATURES

- · Bolt-on grab bars (2): color matched (Biscuit or White), Chrome
- $\cdot \, \mathsf{Sculpted} \,\, \mathsf{armrests} \,\,$
- · Integral tile flange
- · Integral skirt with removable front access panels
- · Skirted models only available in White and Biscuit

ILLUSTRATION KEY

AIR-WHIRLPOOL MODELS





WHIRLPOOL ONLY MODELS



TILE FLANGE CONFIGURATIONS

3T (Alcove)

<u>-</u>)
	Left Tile (LT)	

Leff Tile (LT)

Right Tile (RT)

ORDERING KEY

In the part number, "xx" means an option code must be inserted.

Cost Acrylic stock color (COLxx): ← part number

option code → White (WH)

Example: COLxx + WH = COLWH

Cast Acrylic stock color in White


Manufacturer reserves the right to discontinue models, colors, options and trim finishes without notice.

Customer Name:	Date:
Additional Information:	




SANTA CRUZ

66 x 36 x 23 3/4 inches



Removable Access Panels

Note: Requires a mortar base. ABS Support Base not included.

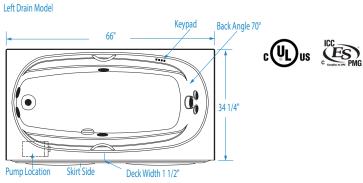





Note: For Air-whirlpool, no alternate pump/blower location available.

Note: Grab Bar option comes with two grab bars.

FEATURES lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt.
Whirlpool #W6636ISL/R	Cast Acrylic	7	102 GPM	=	_	1.5 kw Inline (optional)	Electronic	LH or RH	153
Air-Whirlpool #W31LUX6636ISL/R	Cast Acrylic	7	102 GPM	Channel	Variable speed	1.5 kw Inline	Electronic	LH or RH	292

DIMENSIONS inches

Width	Depth	Height	Skirt
Overall / Net	Overall / Net	Overall / Net	Height
66	36	23 ¾	

SUMP DATA inches

Capacity to Overflow	Min. Operating Capacity	WIDTH @	centerline	DEPTH @	DEPTH @ centerline	
gal (ltr)	gal (ltr)	Тор	Bottom	Тор	Bottom	
85	66	59	47	27 ½	19 1/2	

PLUMBING DIMENSIONS inches

А	В	Drain Diameter / Clearance
1 3/4	10 3/4	

NOTES:

Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 minimum access required at pump/blower location(s).

3) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

ELECTRICAL DATA

Component	Specification	Requirement	
Pump	9 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI	
Optional Heater	1.5 kW; 12 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI	
Blower	1.0 HP; 9.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI	

NOTE

1) This whirlpool must be hard wired to the breaker box. Three outlets will be supplied on the air-whirlpool.