

**DESCRIPTION**

- Solid brass construction
- Chrome, Brushed Chrome or Brushed Nickel finish
- 1/2" IPS connections
- Solid brass waterways

**OPERATION**

- Lever handle
- Temperature controlled through 110° arc of handle


**FLOW**

- Standard aerator is limited to 2.2 gpm max. (8.3 L/min)

**CARTRIDGE**


- Ceramic disc cartridge \*(with temperature limit stop)
- Nonmetallic/nonferrous and ceramic material

**STANDARDS**

- Third party certified to WaterSense® (only applies to 1.5 gpm), ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handles

**WARRANTY**

- Warranted for 5 years against material or manufacturing defects

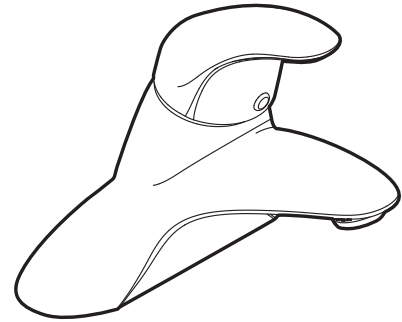


**Single Handle Lavatory Faucet**

| MODEL   | FLOW (gpm) | DRAIN   | FINISH         | WATERSENSE CERTIFIED |
|---------|------------|---------|----------------|----------------------|
| 8413    | 2.2        | Without | Chrome         |                      |
| 8413F15 | 1.5        | Without | Chrome         | x                    |
| 8413F05 | 0.5        | Without | Chrome         |                      |
| 8413F03 | 0.35       | Without | Chrome         |                      |
| 8414    | 2.2        | Metal   | Chrome         |                      |
| 8414BC  | 2.2        | Metal   | Brushed Chrome |                      |
| 8414BN  | 2.2        | Metal   | Brushed Nickel |                      |



See table above

**NOTE:** This faucet is designed to be installed thru 3 holes, 1" min. dia.

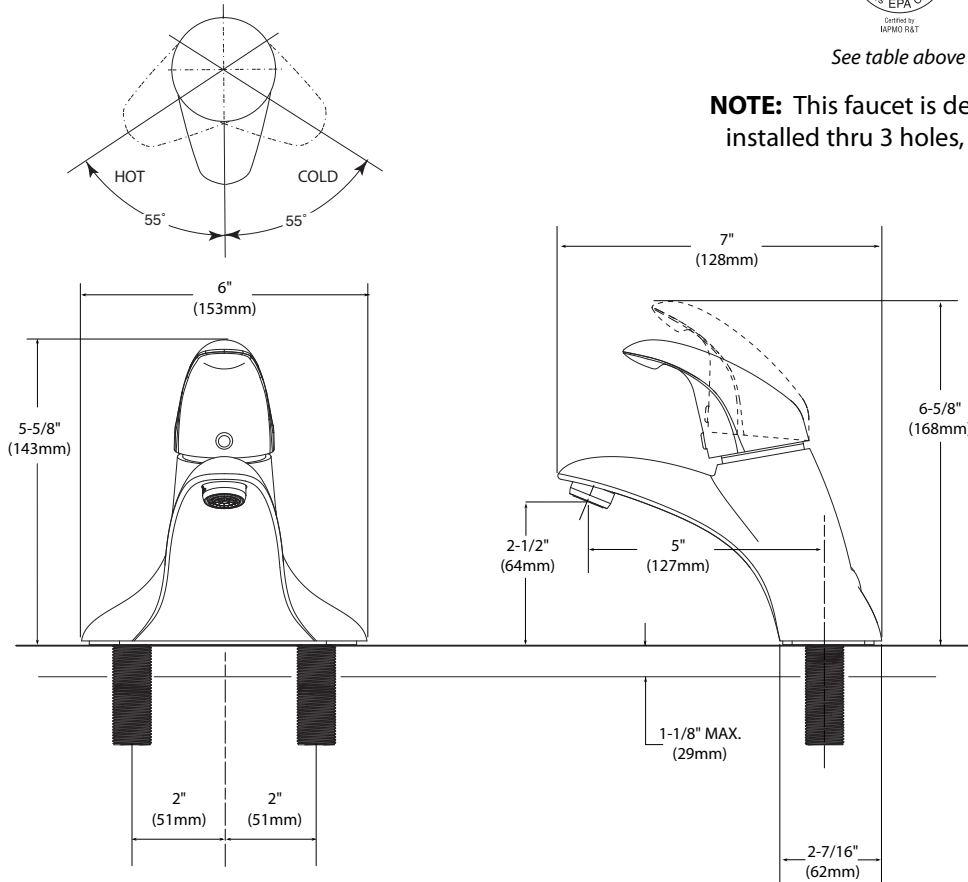

**CRITICAL DIMENSIONS**

(DO NOT SCALE)

**DESCRIPTION**

- Solid brass construction
- Chrome, Brushed Chrome or Brushed Nickel finish
- 1/2" IPS connections
- Solid brass waterways

**OPERATION**

- Lever handle
- Temperature controlled through 110° arc of handle


**FLOW**

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  - 1.2 gpm max (4.5L/min) at 60 psi

**CARTRIDGE**


- Ceramic disc cartridge \*(with temperature limit stop)
- Nonmetallic/nonferrous and ceramic material

**STANDARDS**

- Third party certified to WaterSense,® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handle

**WARRANTY**


- Warranted for 5 years against material or manufacturing defects

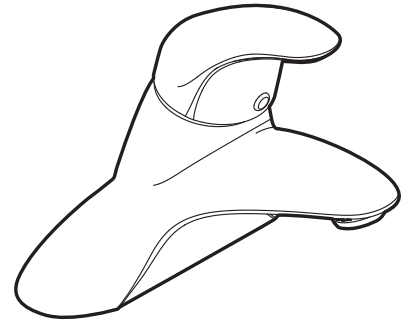

| Single Handle Lavatory Faucet |            |         |                |                      |
|-------------------------------|------------|---------|----------------|----------------------|
| MODEL                         | FLOW (gpm) | DRAIN   | FINISH         | WATERSENSE CERTIFIED |
| 8413F12                       | 1.2        | Without | Chrome         | x                    |
| 8414F12                       | 1.2        | With    | Chrome         | x                    |
| 8414F12BN                     | 1.2        | With    | Brushed Nickel | x                    |



**NOTE:** This faucet is designed to be installed thru 3 holes, 1" min. dia.

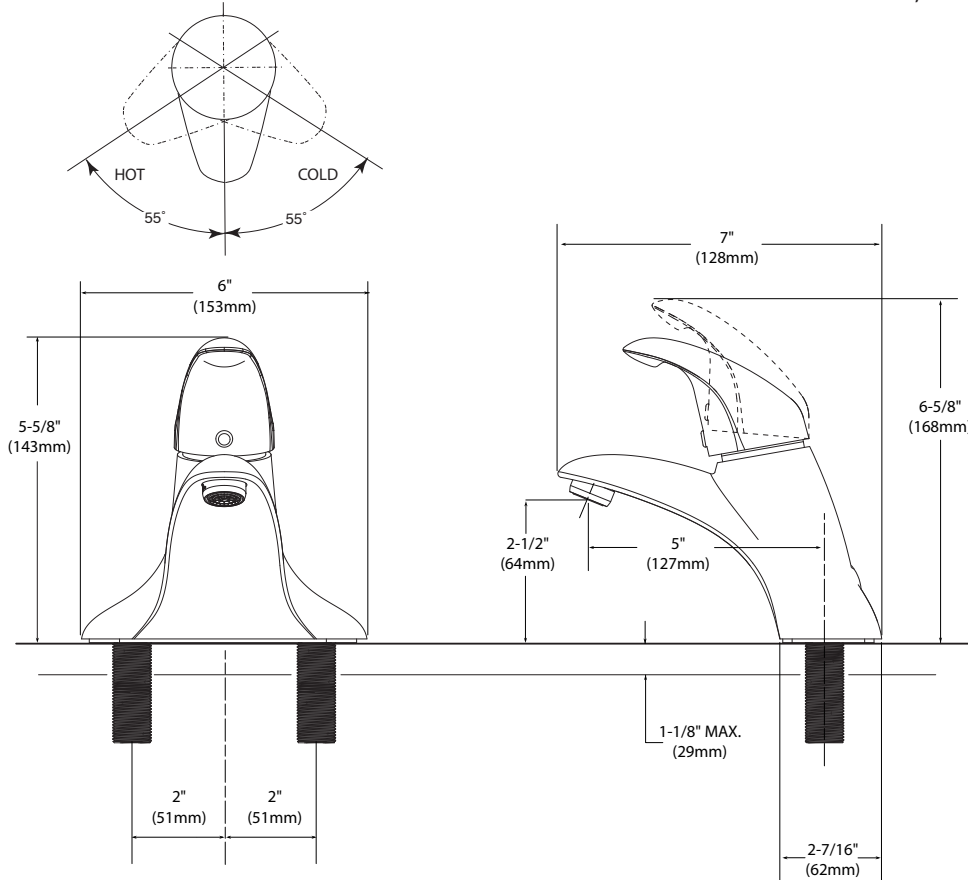

**CRITICAL DIMENSIONS**

(DO NOT SCALE)