

Buy it for looks. Buy it for life.®

DESCRIPTION

- Metal construction with chrome finish
- Includes showerhead, arm, flange and diverter tub spout

- Lever style handle with red/blue temperature indicator on the escutcheon
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^{\circ}$

FLOW

- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- **ADA (** for lever handle

WARRANTY

Limited lifetime warranty against leaks, drips and finish defects to the original consumer purchaser

5 year warranty if used in commercial installations

Specifications




Gibson™ Single-Handle Tub/Shower Trim Kit

T2901 series - valve trim only

T2902 series - shower trim only T2903 series - tub/shower trim

62300 series Valves:

2500 series

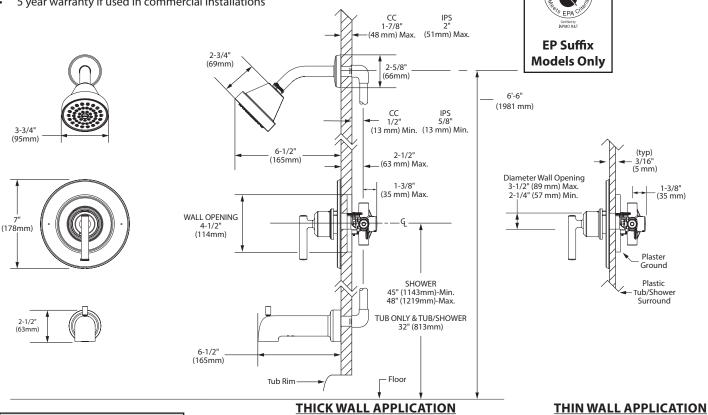



CRITICAL DIMENSIONS

(DO NOT SCALE)

www.moen.com