

Buy it for looks. Buy it for life.®

#### **FAUCET DESCRIPTION**

- Metal construction with chrome finish
- Includes showerhead, arm, flange and diverter spout

#### **OPERATION**

- Lever style handle with temperature red/blue indicator on the escutcheon
- 3 function showerhead: full, wide and massage
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3.6^{\circ}$  F ( $\pm 2^{\circ}$  C)
- 3 function showerhead: full, wide, and massage

## **FLOW**

EP suffix models are limited to 2.0 gpm (6.6 L/min) at 80 psi

## **CARTRIDGE**

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

## **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are IAPMO Green listed and third party certified to WaterSense®
- **ADA** for lever handle

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

# Specifications




# Genta™ POSI-TEMP° Single-Handle Tub/Shower Trim Kit


**Model:** T2471 series - valve trim only

T2472 series - shower trim only T2473 series - tub/shower trim only

Valves: 62300, 2500 series



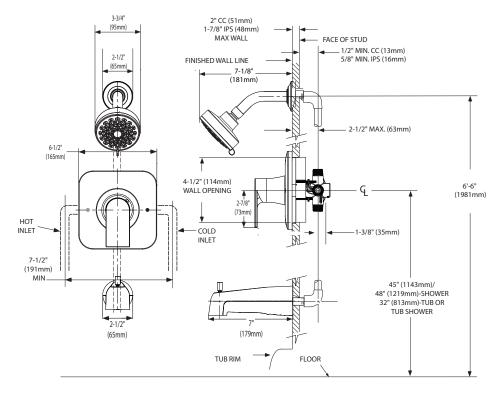



THICK WALL APPLICATION

CRITICAL DIMENSIONS

**THIN WALL APPLICATION** 

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com