

INSTRUCTION MANUAL

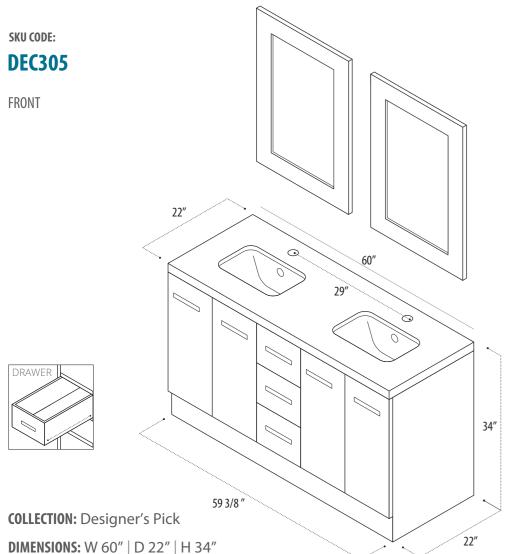

BACK

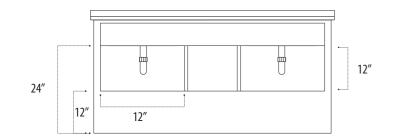

Drain

PACKING LIST

- Pre-assembled cabinet
- Countertop
- 2 Sinks
- 2 Mirrors

WARRANTY


Design Element warrants cabinets, mirrors, finishes and fittings to be free from defects in workmanship and materials under normal use and service for a period of one (1) year.


• Mirror mounting screws

Instruction Manual

Please report any damage or missing pieces of your vanity to us immediately. These things must be reported no later than 30 days from the date of delivery.

Attaching Sink To Counter Top






1. Apply continuous stream of silicon glue on circumference of the sink. 2. Turn the counter top upside down and provide support from beneath. (Note: While turning around the double sink counter tops, always add support from the centre for safety)


3. Put the glued sink over the cutout and attach it firmly.


4. Tie up screws positioned at the respective places on the counter top. 5. Don't use the sink instantly. Wait for 24 hours for the Silicon glue to dry.

Attaching Counter Top To Cabinet





Installing The Drain On The Sink






Hanging Mirror On The Wall








1. Measure the distance between the screw holes at the back of the mirror. 2. Find the studs on the wall and drill two holes inside the studs as per your measurement.

3. Insert the plastic plugs into the drilled holes. Insert screws into the plastic plugs. Leave the screws at least 0.5'' - 0.75'' inches outside.

4. Hang the mirror on to the screws.

SAFETY AND PRECAUTIONS

- glue dry, before using your vanity.

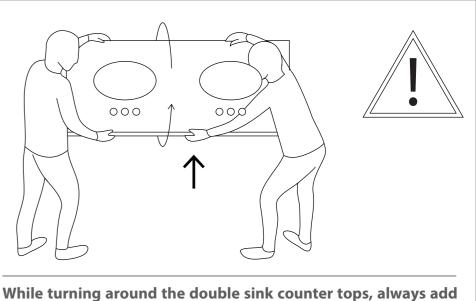


CARE AND CLEANING

- finish.

CONTACT SUPPORT

PHONE: (888) 487-4488 EMAIL: cs@designelementusa.com ADDRESS: 8715 Boston place, Rancho Cucamonga, CA. 91730





1. After you have installed the sink and countertop on the cabinet, put the drain assembly inside the hole in the sink and fix it firmly.

- 2. For only the overflow sinks, make sure that the hole on the drain is aligned with the overflow hole on the sink
- 3. Tie up the rubber and metal mounting rings over the drain opening from beneath the sink.
- 4. Now that the drain is installed, you can connect the trap onto the drain.

1. Apply continuous stream of quality

silicon glue on top of the cabinet

2. Place the counter top on top of the

contact area.

cabinet.

• Please read and understand this entire manual before attempting to assemble, operate or install the product.

• During installation, handle the countertop and sink with optimum care.

• Once you add glue and fit the countertop / sink, wait for 24 hours to let the

support from the centre for safety

• Avoid using any type of rough cleaning material on top of the cabinet

• Use mild liquid soap and water-dampened soft cloth to remove stains from the cabinet and to clean the marble countertop.

• For the glass part of the mirror, use ammonia-free cleaning products.

