

SPECIFICATIONS


Features/Benefits



- “1.75 gpm (6.6 L/min) Maximum Flow Rate @80psi
- Includes Treysta™ Pressure Balance Ceramic Disc Cartridge
- Requires Treysta™ Rough-In Valve, G00GS555S (Horizontal Inputs) or G00GS557S Series (Vertical Inputs)
- Diverter on Tub Valve
- Includes 5-Function Surge Showerhead, D462027
- 12” Metal Curved Shower Arm
- Accommodates Standard, Back-to-Back, and Thin Wall Installations



Available Color/Finishes







Color	Description
	Chrome

Please see danze.com or current price list for available finishes.
Finish is defined by additional suffix.

Standards & Certifications



Flow Rate

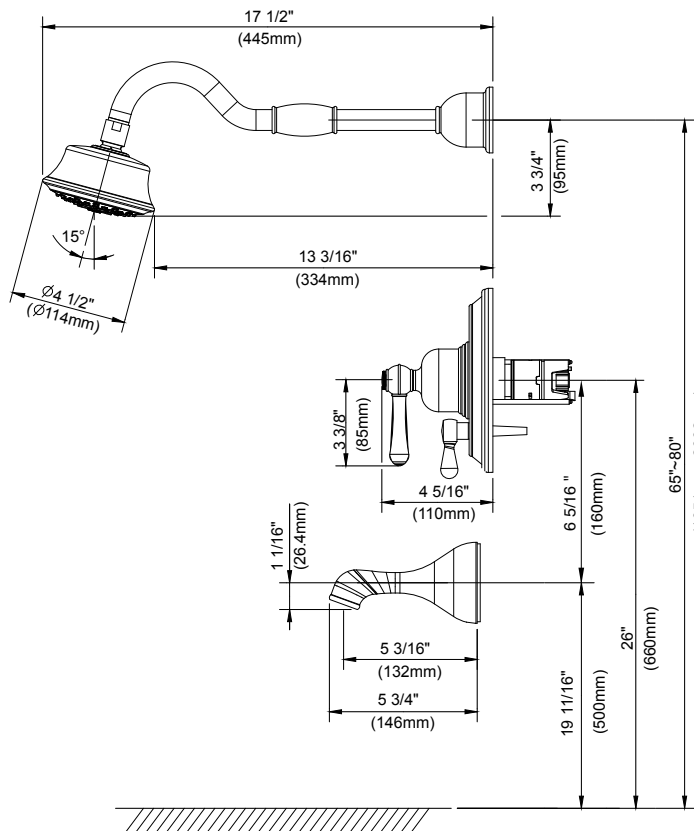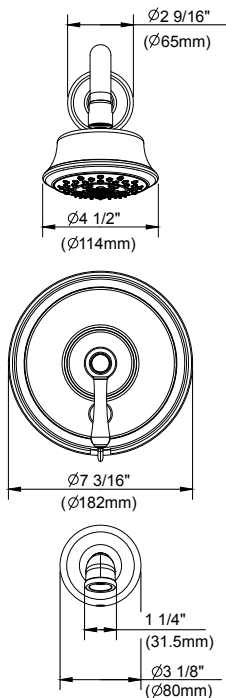

Submittal Information:

Name: _____
Location: _____

Contractor: _____
Contact #: _____