


BERWICK[®] SINGLE CONTROL VESSEL FAUCET

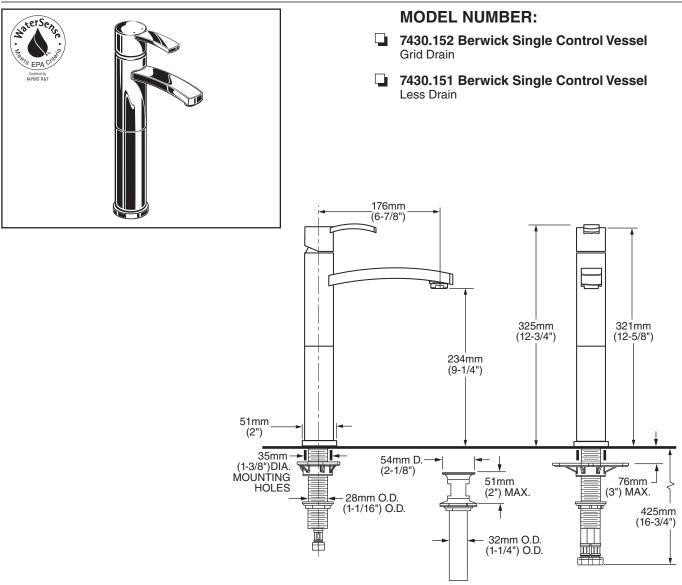

GENERAL DESCRIPTION:

Brass body. Metal lever handle. Washerless 35mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Brass Construction: Durable. Easy to clean. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.

Choice of Finishes: Available in Polished Chrome or Satin Nickel (PVD).

SUGGESTED SPECIFICATION:

Single control lavatory faucet shall feature a brass body and metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with an integral hot limit safety stop. Fitting shall be American Standard Model # 7430.____.


4merican Standard

BERWICK[®] SINGLE CONTROL VESSEL FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 NSF 61/Section 9 and Annex G CSA B125.1



		Finish (
Product Number	Description	Polished Chrome	PVD Satin Nickel
		002	295
7430.152	Berwick Single Control Monoblock faucet with grid drain.		
7430.151	Berwick Single Control Monoblock faucet less drain.		

A Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**	
0.5gpm (1.9Lpm) PCA* Spray	F05	
1.0gpm (3.8Lpm) PCA Aerator	F10	

*PCA — Pressure Compensating

**To modify a product, add suffix after the 4th digit (ex. $2064 \underline{F05}101.002$)

***Modified product models are **NOT** WaterSense certified.