


PRINCETON® TWO-HANDLE CENTERSET LAVATORY FAUCET




MODEL NUMBER:

☐ 4508.201 Princeton 2-Handle Centerset

Metal Speed Connect® pop-up drain.

Metal lever handle.

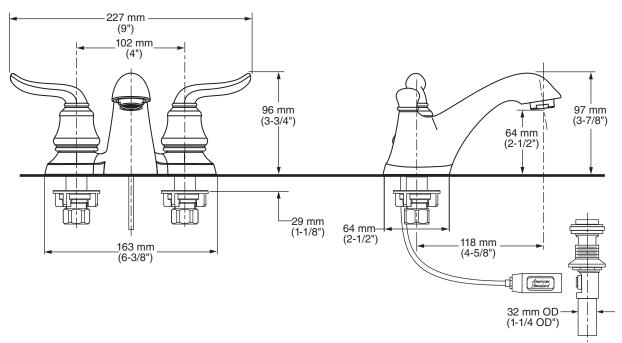

GENERAL DESCRIPTION:

Centerset lavatory faucet on 4" centers. 1/4 turn washerless ceramic disc valve cartridges. Durable cast brass waterways with one-half inch male inlet shanks. Metal body. Color matched underbody. Metal lever handles. 20 inch (500 mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect ® drain body with 1-1/4 inch (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Cast Brass Waterways with "City Shanks": Strong and durable. Integral tabs on casting provide a wobble-free installation.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Longer Spout: Provides extended reach into lavatory.

SUGGESTED SPECIFICATION

Two-handle 4" centerset lavatory faucet shall feature a cast brass waterway with 1/2" male inlet shanks. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 4508.201.

© 2015 AS America, Inc. Revised 12/15




PRINCETON® TWO-HANDLE CENTERSET LAVATORY FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125.1 NSF 61/Section 9 and Annex G



			Finish Options		
Duaduat			Polished Chrome	Oil Rubbed Bronze	PVD Satin Nickel
Product Number	Description	002	224	295	
4508.801	Princeton 2-Handle Centerset with metal Speed Connect® pop-up drain. Metal lever handles.	E			

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**	
0.5 gpm (1.9 Lpm) PCA* Spray	F05	
0.5 gpm (1.9 Lpm) Vandal Resistant PCA Spray	V05	
1.0 gpm (3.8 Lpm) PCA Aerator	F10	
1.0 gpm (3.8 Lpm) Vandal Resistant PCA Aerator	V10	
1.2 gpm (4.5 Lpm) Vandal Resistant PCA Aerator	V12	
1.5 gpm (5.7 Lpm) Vandal Resistant PCA Aerator	V15	

^{*}PCA — Pressure Compensating

© 2015 AS America, Inc. Revised 12/15

^{**}To modify a product, add suffix after the 4th digit (ex. 2064**F05**101.002)

^{***}Modified product models are **NOT** WaterSense certified.