


Submitted Model No.:

**Specific Features:** 

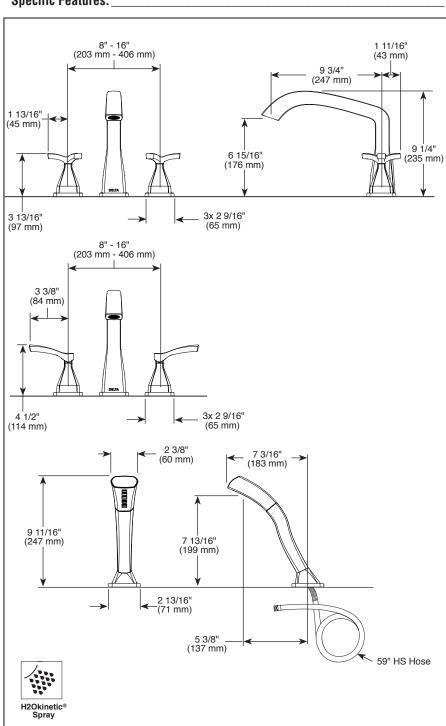

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



see what Delta can do

# ROMAN TUB/WHIRLPOOL **FAUCET TRIM**

- Stryke<sup>™</sup> Bath Collection
- Three Hole Installation (T2776 & T27766 Series)
- Four Hole Installation (T4776 & T47766 Series)

#### **FEATURES:**

 Single setting H<sub>2</sub>Okinetic<sup>®</sup> hand shower (T4776 & T47766)

## STANDARD SPECIFICATIONS:

- Temperature and volume controlled with handles
- Rough-In kit must also be ordered to complete installation (R4707 for four hole and R2707 for three hole). There are separate specification sheets on each rough-in kit if more details are required.
- Hand shower includes certified double check valves for backflow prevention (T4776 & T47766)
- Hand shower maximum 1.75 gpm @ 80 psi, 7.6 L/min @ 550 kPa
- Red/blue indicators

## WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



## COMPLETE VALVE COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 Indicates compliance to - Valve control only ICC/ANSI A117.1
- EPA WaterSense® Applies to hand shower only-59421-▲-PK

**Delta Faucet Company** 55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON NSP 4L1 © 2019 Delta Faucet Company