MOEN®

Specifications

FAUCET DESCRIPTION

• Metal construction with various finishes identified by suffix **OPERATION**


- Pull-on/push-off operation of temperature and volume, rotational control of transfer valve
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 180° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to ±3.6°F (±2°C)

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein, including ASSE 1016
- ADA (for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



Belfield[™] Three-Function Transfer Valve Trim Kit

Models: T3322 series

Valves: 3330 series, 3320 series

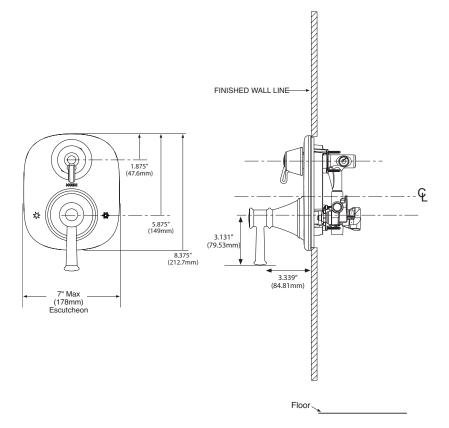

CRITICAL DIMENSIONS

(DO NOT SCALE)

SPC15716

9/26/2018