
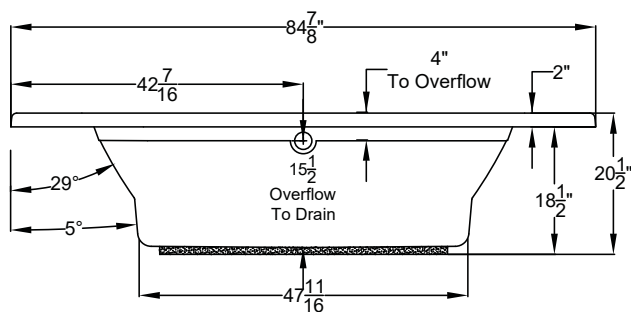
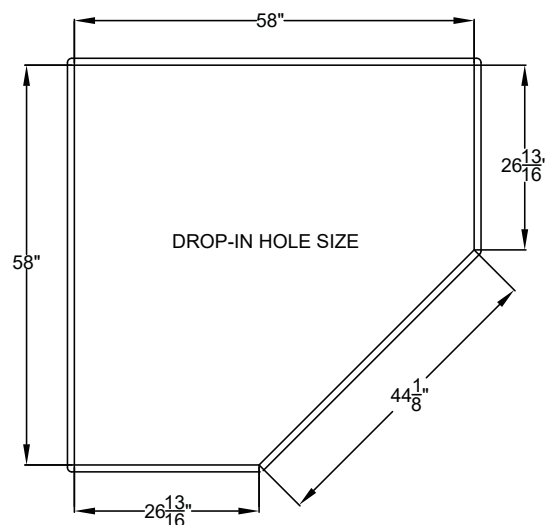


Integrity[®] Collection Specifications

C6060

AirMasseur[®]

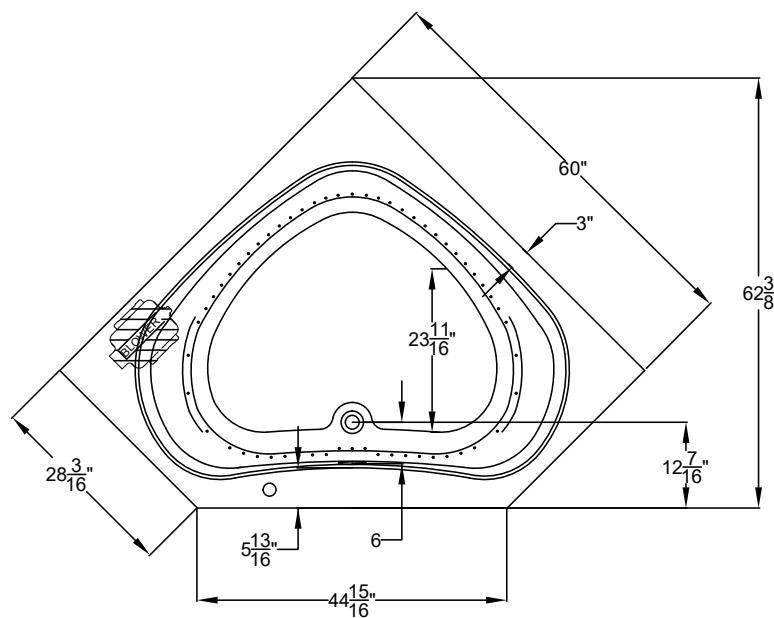

Patents received or pending.

Note: Dimensional Tolerances: $\pm 1/4"$

Drop-in-Hole Size:	See Diagram
Operating Capacity:	54 Gal.
Overflow Capacity:	87 Gal.
Floor Loading / sq.ft.:	42.1 lbs.
Carton Weight:	126 lbs.
Cube:	50.9 ft. ³

Air Switch Control




Includes a quiet, 120v, 3/4 HP, variable speed air blower with an integral air heater, 20-minute timer and automatic purge cycle. Air switch operates the on/off and speed functions of the blower. Requires (1) 15A, 120v GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on Level Form[™] pre-leveled full support base.


We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

8328 MacArthur Dr. • North Little Rock, AR 72118
501.771.4477 • Fax: 501.771.2333
Customer Service: 800.255.5766
www.jasoninternational.com

C6060 MicroSilk®

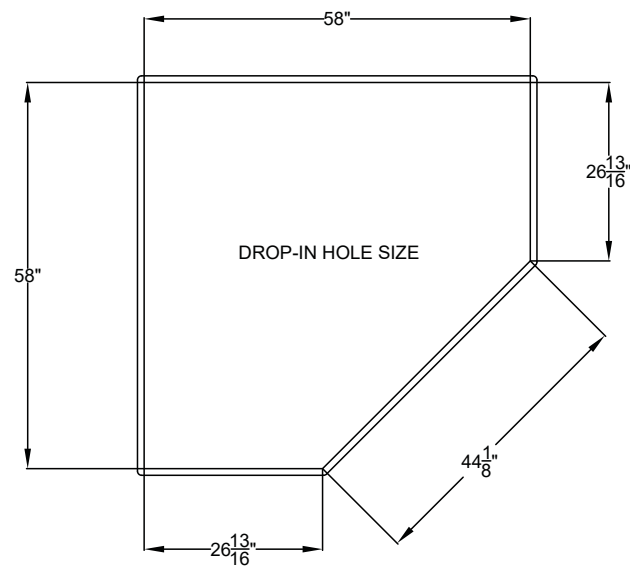

Note: Dimensional Tolerances: $\pm 1/4"$




<p>Air Switch Control</p>		<p>Includes a quiet, 120V MicroSilk® System, 1 MicroSilk® Delivery Port. Requires (1) 20A, 120v GFCI protected circuit.</p>
--------------------------------------	--	---

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.

Integrity[®] Collection Specifications

C6060

Whirlpool & Soaking

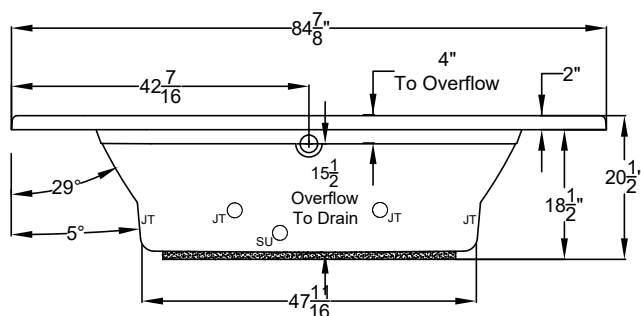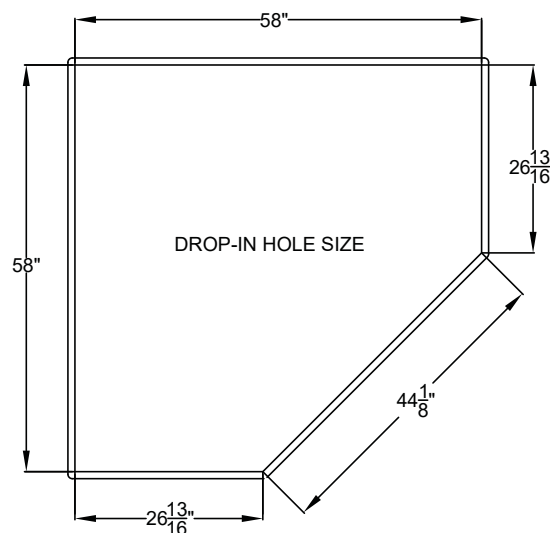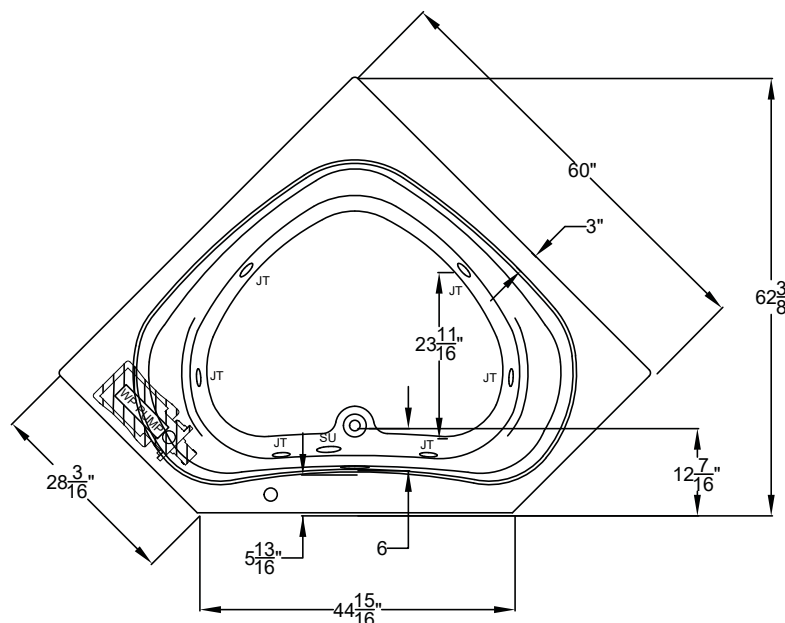


Patents received or pending.

Note: Dimensional Tolerances: $\pm 1/4"$

Note: The blower extends approximately 1" past the end radius of the bath. This requires angling the bath into the drop-in hole.

Drop-in-Hole Size:	See Diagram
Operating Capacity:	54 Gal.
Overflow Capacity:	87 Gal.
Floor Loading / sq.ft. (WP/ Soaking):	42/ 40 lbs.
Carton Wt. (WP/Soaking):	125/90 lbs.
Cube:	50.9 ft. ³

Air Switch Control



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.