


## JASON S


8328 MacArthur Dr. • North Little Rock, AR 72118

501.771.4477 • Fax: 501.771.2333 Customer Service: 800.255.5766 www.jasoninternational.com

## Integrity® Collection Specifications K3060

AirMasseur®

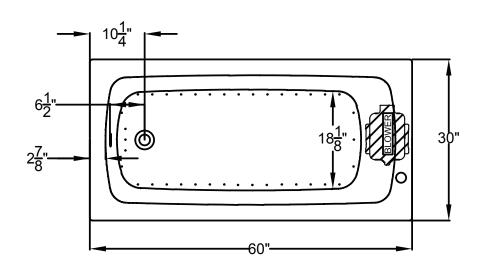

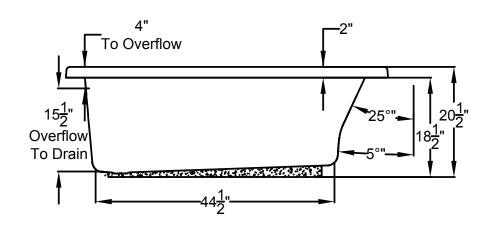

Patents received or pending. Note: Dimensional Tolerances:  $\pm 1/4$ "

Drop-in-Hole Size: 28" x 58"

Operating Capacity: 38 Gal.

Overflow Capacity: 60 Gal.

Floor Loading / sq.ft. (WP/ Soaking): 57.1 lbs.

Carton Wt. (WP/Soaking): 104 lbs.

Cube: 26.4 ft.<sup>3</sup>



Includes a quiet, 120v, 3/4 HP, variable speed air blower with an integral air heater, 20-minute timer and automatic purge cycle. Air switch operates the on/off and speed functions of the blower. Requires (1) 15A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form pre-leveled full support base.


We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.




8328 MacArthur Dr. • North Little Rock, AR 72118

501.771.4477 • Fax: 501.771.2333 Customer Service: 800.255.5766 www.jasoninternational.com

### **Integrity® Collection Specifications** K3060 MicroSilk®

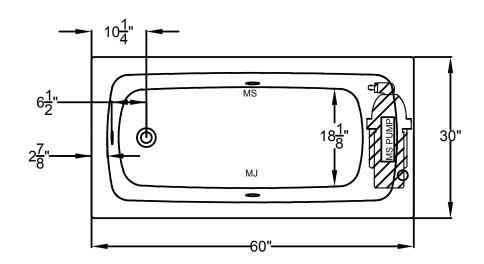

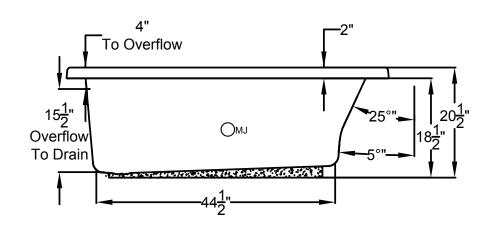

Note: Dimensional Tolerances: ±1/4" Patents received or pending.

28" x 58" **Drop-in-Hole Size: Operating Capacity:** 38 Gal.

Carton Wt. (WP/Soaking): 105 lbs.

**Overflow Capacity:** 60 Gal. Floor Loading / sq.ft. (WP/ Soaking): 57.2 lbs. 26.4 ft.<sup>3</sup> Cube:



Includes a quiet, 120V MicroSilk® System, 1 MicroSilk® Delivery Port. Requires (1) 20A, 120v GFCI protected circuit.

Construction: Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.





## JASON S

8328 MacArthur Dr. • North Little Rock, AR 72118

501.771.4477 • Fax: 501.771.2333 Customer Service: 800.255.5766 www.jasoninternational.com

# Integrity® Collection Specifications K3060 Whirlpool & Soaking

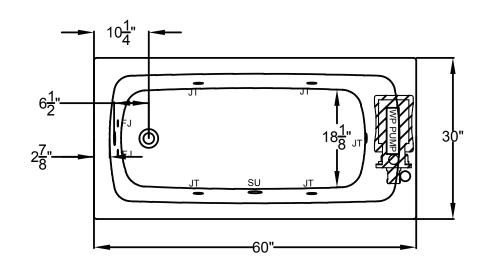

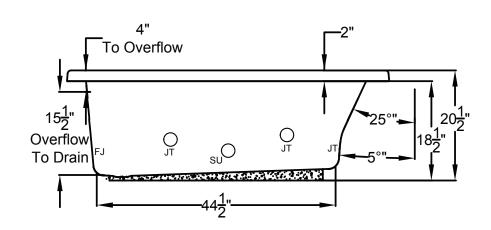

Patents received or pending.

Note: Dimensional Tolerances: ±1/4"

26.4 ft.<sup>3</sup>

Air Switch Control



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

Drop-in-Hole Size:28" x 58"Operating Capacity:38 Gal.Overflow Capacity:60 Gal.Floor Loading / sq.ft. (WP/ Soaking):56.8/ 53.3 lbs.Carton Wt. (WP/Soaking):101/ 66 lbs.

Cube:

**Construction:** Reinforced Acrylic shell mounted on Level Form<sup>™</sup> pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.