


## Integrity<sup>®</sup> Collection Specifications

### K3660

#### AirMasseur<sup>®</sup>

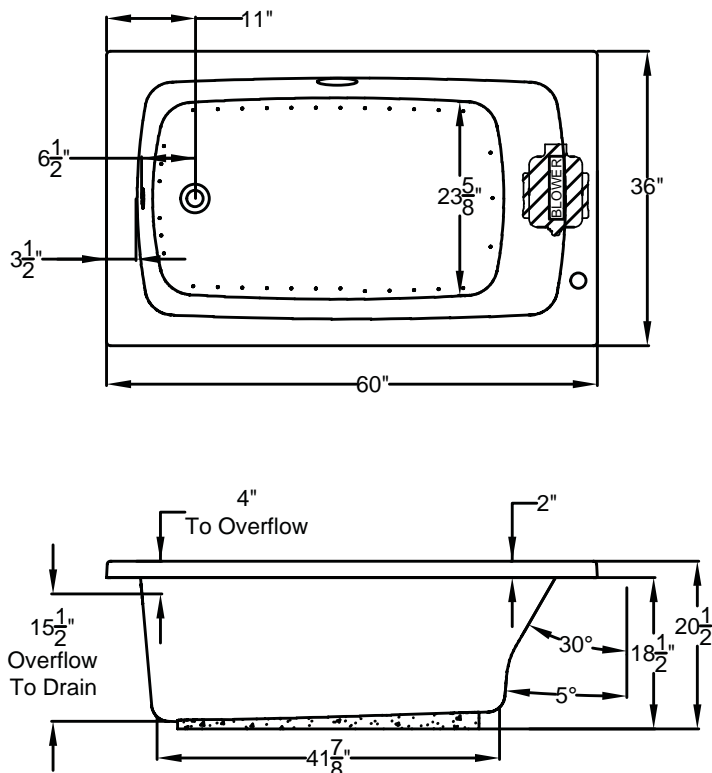

**Note:** Control Air Switch will be located on bather's left.

Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4"$

<b>Drop-in-Hole Size:</b>	34" x 58"
<b>Operating Capacity:</b>	40 Gal.
<b>Overflow Capacity:</b>	66 Gal.
<b>Floor Loading / sq.ft.:</b>	49.3 lbs.
<b>Carton Weight:</b>	108 lbs.
<b>Cube:</b>	31.3 ft. <sup>3</sup>

Air Switch  
Control



Includes a quiet, 120v, 3/4 HP, variable speed air blower with an integral air heater, 20-minute timer and automatic purge cycle. Air switch operates the on/off and speed functions of the blower. Requires (1) 15A, 120v GFCI protected circuit.


**Construction:** Reinforced Acrylic shell mounted on Level Form<sup>™</sup> pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*

## Integrity<sup>®</sup> Collection Specifications

### K3660

#### MicroSilk<sup>®</sup>

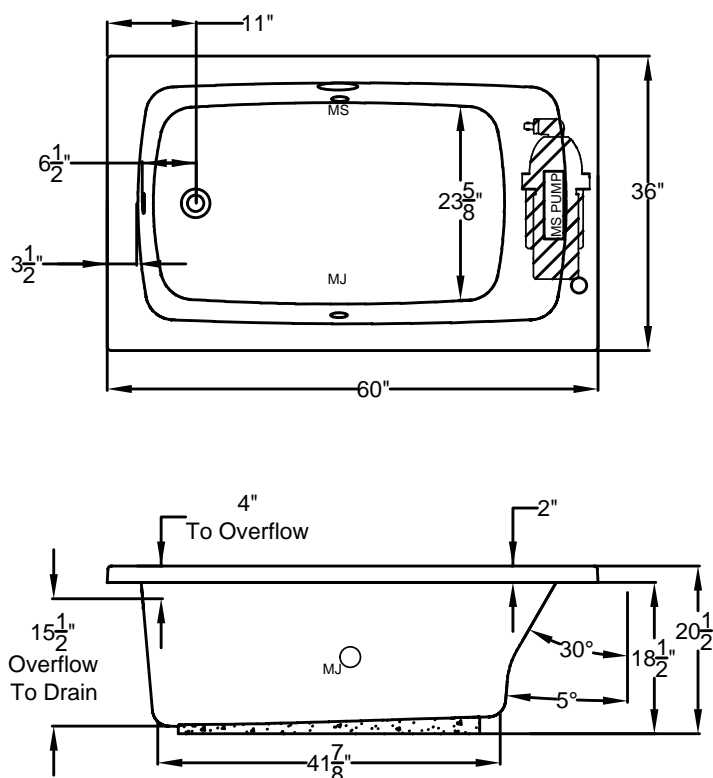

**Note:** Control Air Switch will be located on bather's left.

Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4"$

<b>Drop-in-Hole Size:</b>	34" x 58"
<b>Operating Capacity:</b>	40 Gal.
<b>Overflow Capacity:</b>	66 Gal.
<b>Floor Loading / sq.ft.:</b>	49.3 lbs.
<b>Carton Weight:</b>	108 lbs.
<b>Cube:</b>	31.3 ft. <sup>3</sup>

Air Switch  
Control



Includes a quiet, 120V MicroSilk<sup>®</sup> System, 1 MicroSilk<sup>®</sup> Delivery Port. Requires (1) 20A, 120v GFCI protected circuit.


**Construction:** Reinforced Acrylic shell mounted on Level Form<sup>™</sup> pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*

## Integrity<sup>®</sup> Collection Specifications

### K3660

### Whirlpool & Soaking

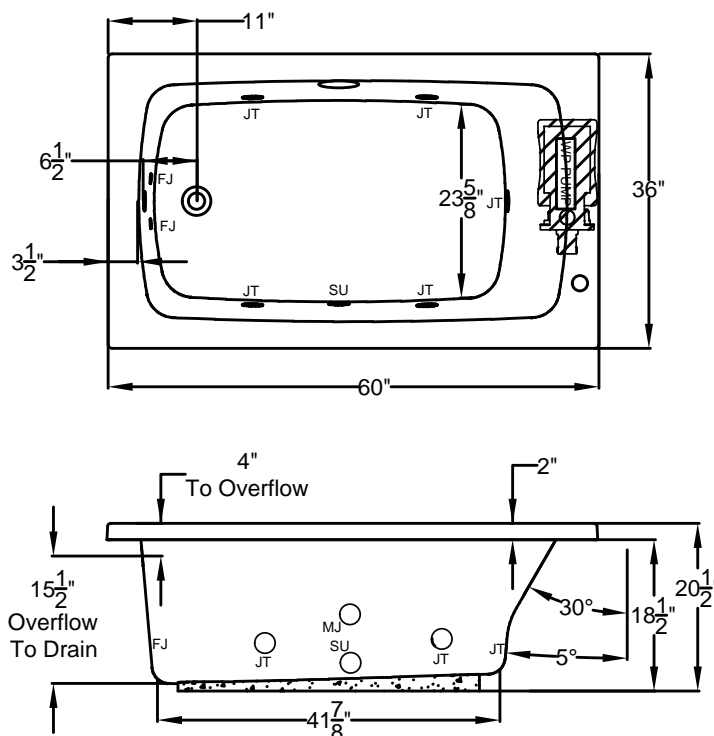

**Note:** Control Air Switch will be located on bather's left.

Patents received or pending.

Note: Dimensional Tolerances:  $\pm 1/4"$

<b>Drop-in-Hole Size:</b>	34" x 58"
<b>Operating Capacity:</b>	40 Gal.
<b>Overflow Capacity:</b>	66 Gal.
<b>Floor Loading / sq.ft. (WP/ Soaking):</b>	48.7 / 46 lbs.
<b>Carton Wt. (WP/Soaking):</b>	101 / 69 lbs.
<b>Cube:</b>	31.3 ft. <sup>3</sup>

Air Switch  
Control



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

**Construction:** Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

*We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.*