


### BEFORE YOU BEGIN

- Observe all local plumbing and building codes.
- Follow these instructions only if it applies to your installation.
- Before installation, carefully inspect it for damage. Return the vanity top to its packaging until you are ready to install it.
- These instructions contain important care and cleaning instructions. Please review these instructions carefully.

### SUGGESTED TOOLS AND MATERIALS



Phillips Screwdriver



Silicon Sealant



Tape Measure



Safety Glasses

### PARTS / HARDWARE INCLUDED




4x



4x



4x




4x

### SINK INSTALLATION




**CAUTION!** Risk of product damage. Do not use plumbers putty or oil-based sealers with this vanity top. These products will stain surfaces permanently.

1

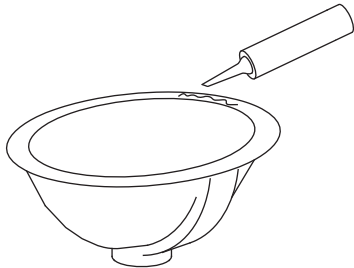


Apply a continuous bead of quality sealant to the surface (rim) of the sink.

2

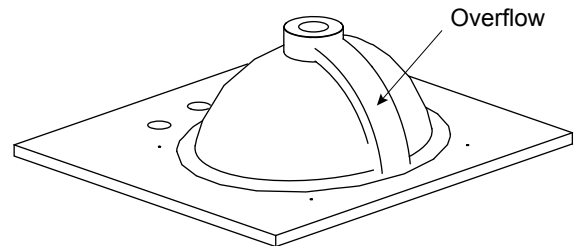

Turn the vanity top upside down and place it on a clean, scratch-resistant surface. Center the sink over the cutout. The overflow for these models will be on the opposite side of the faucet.

3

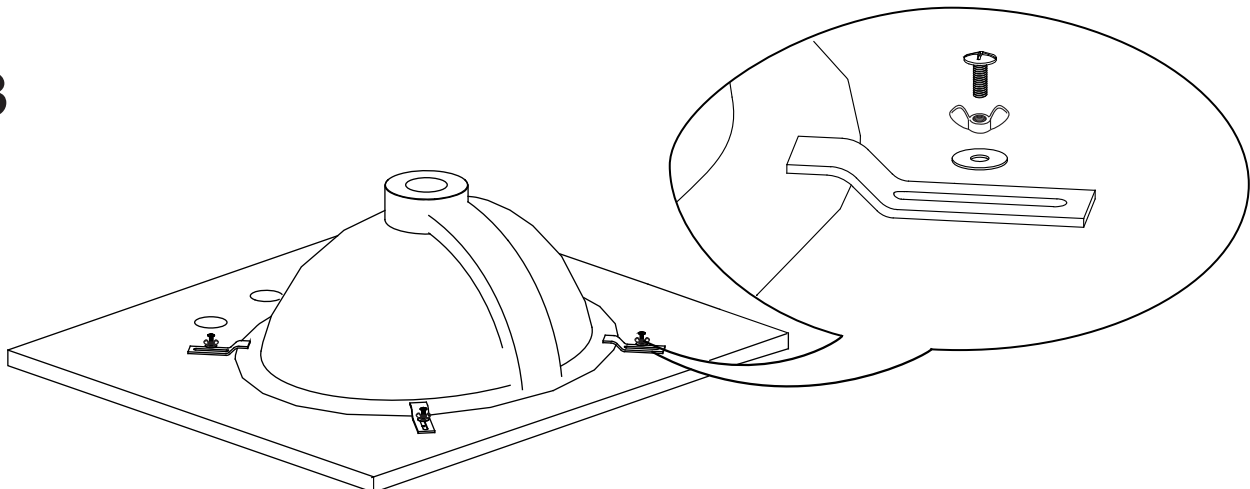

Secure the sink to the top using the mounting kit / hardware provided.

**\*\*NOTE:** Sink style, shape, and cutout on top may vary from the picture above. Instructional Purposes only.

---

## CARE AND CLEANING

- Never use a strong / abrasive cleaner. Always test your cleaning solution on an unnoticeable area before applying it to the entire surface.
- Wipe surfaces clean, immediately after applying cleaner.
- Do not allow the cleaner to sit or soak. Never let cleaners sit on the surface of the lavatory.
- Use a soft, dampened sponge or cloth. Never use an abrasive material such as a brush or scouring pad to clean surfaces. They will scratch the lavatory surface.
- Always rinse and wipe clean the fixtures to prevent soap buildup.