





MYSON


Ferlo CMR Contemporary HYDRONIC

Technical Information

- . 1-1/2" "D" Vertical Tubes
- . 1" Oval Horizontal Tubes
- . Open or Closed Loop Installation
(Not for use with potable water systems in Vermont or California)
- . Brass Construction
- . 1/2" Copper Rough-in
- . Modern Valves and Sleeve Kit

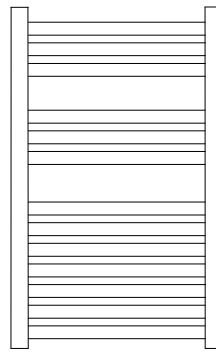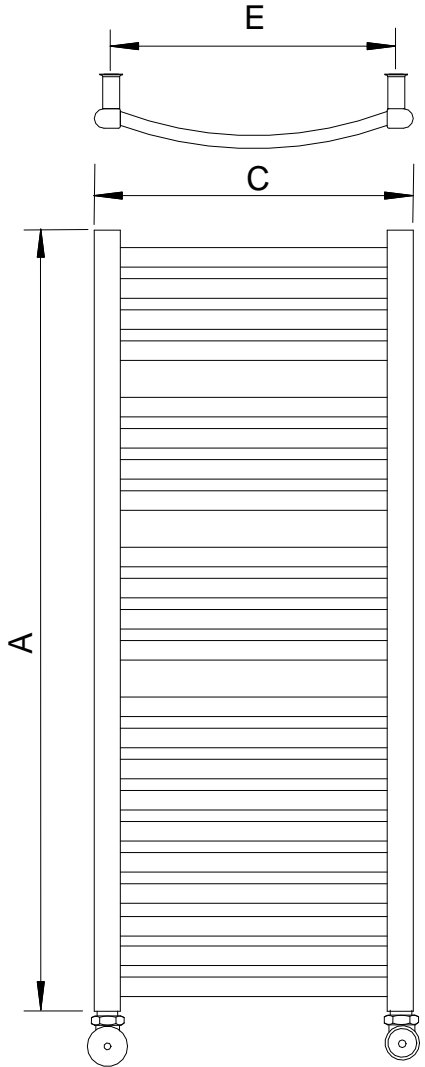

CMR-1,2,3
Configuration

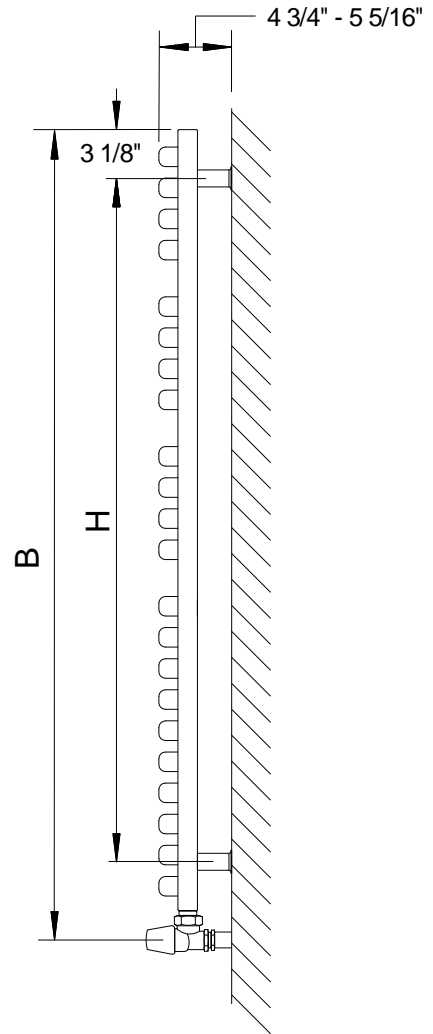

MODEL	Dim "A"	Dim "B"	Dim "C"	Dim "E"	Dim "H"	BTUH*	Wgt.(lbs)
CMR1	28 3/4"	30 3/8"	19 5/16"	17 3/16"	22 7/16"	972	39
CMR2	28 3/4"	30 3/8"	23 1/4"	21 1/8"	22 7/16"	1150	45
CMR3	28 3/4"	30 3/8"	29 1/8"	27"	22 7/16"	1419	56
CMR4	47 1/4"	48 7/8"	19 5/16"	17 3/16"	40 15/16"	1637	59

*AWT = 155 Degrees Fahrenheit

CMR
No Scale
REVA 12/07/09