



California Faucets®

**Descanso®**

Industrial Wall Mount Tub Filler with Handshower

1006-XX.20  
1006-XX.18

**Features**

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- 15 gpm (56.8 L/min) tub filler max flow rate at 60 psi
- 2.0 gpm (7.6 L/min) or 1.8 gpm (6.8 L/min) handshower max flow rate
- 1/4 turn ceramic disc cartridge(s)

**Codes/Standards Applicable**

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) / DOE (2.0 & 1.8 gpm)
- EPA WaterSense handshower (2.0 gpm)
- Commonwealth of MA
- ADA compliant (lever handles only)
- Local codes may require installation of an upstream tempering valve




1006-30K.FR shown

XX denotes handle series



Handle Series	A	B
30	6-5/8" [168]	13" [330]
30F 30T	6-5/8" [168]	13-1/4" [337]
30K	6-1/4" [159]	13-1/4" [337]
30X	6-5/8" [168]	10-1/16" [256]
30XF 30XT	6-5/8" [168]	10-1/16" [256]
30XK	6-1/4" [159]	10" [254]
80	6-5/8" [168]	13-1/2" [343]
80W 80WB 80WR	6-5/8" [168]	9-5/16" [237]

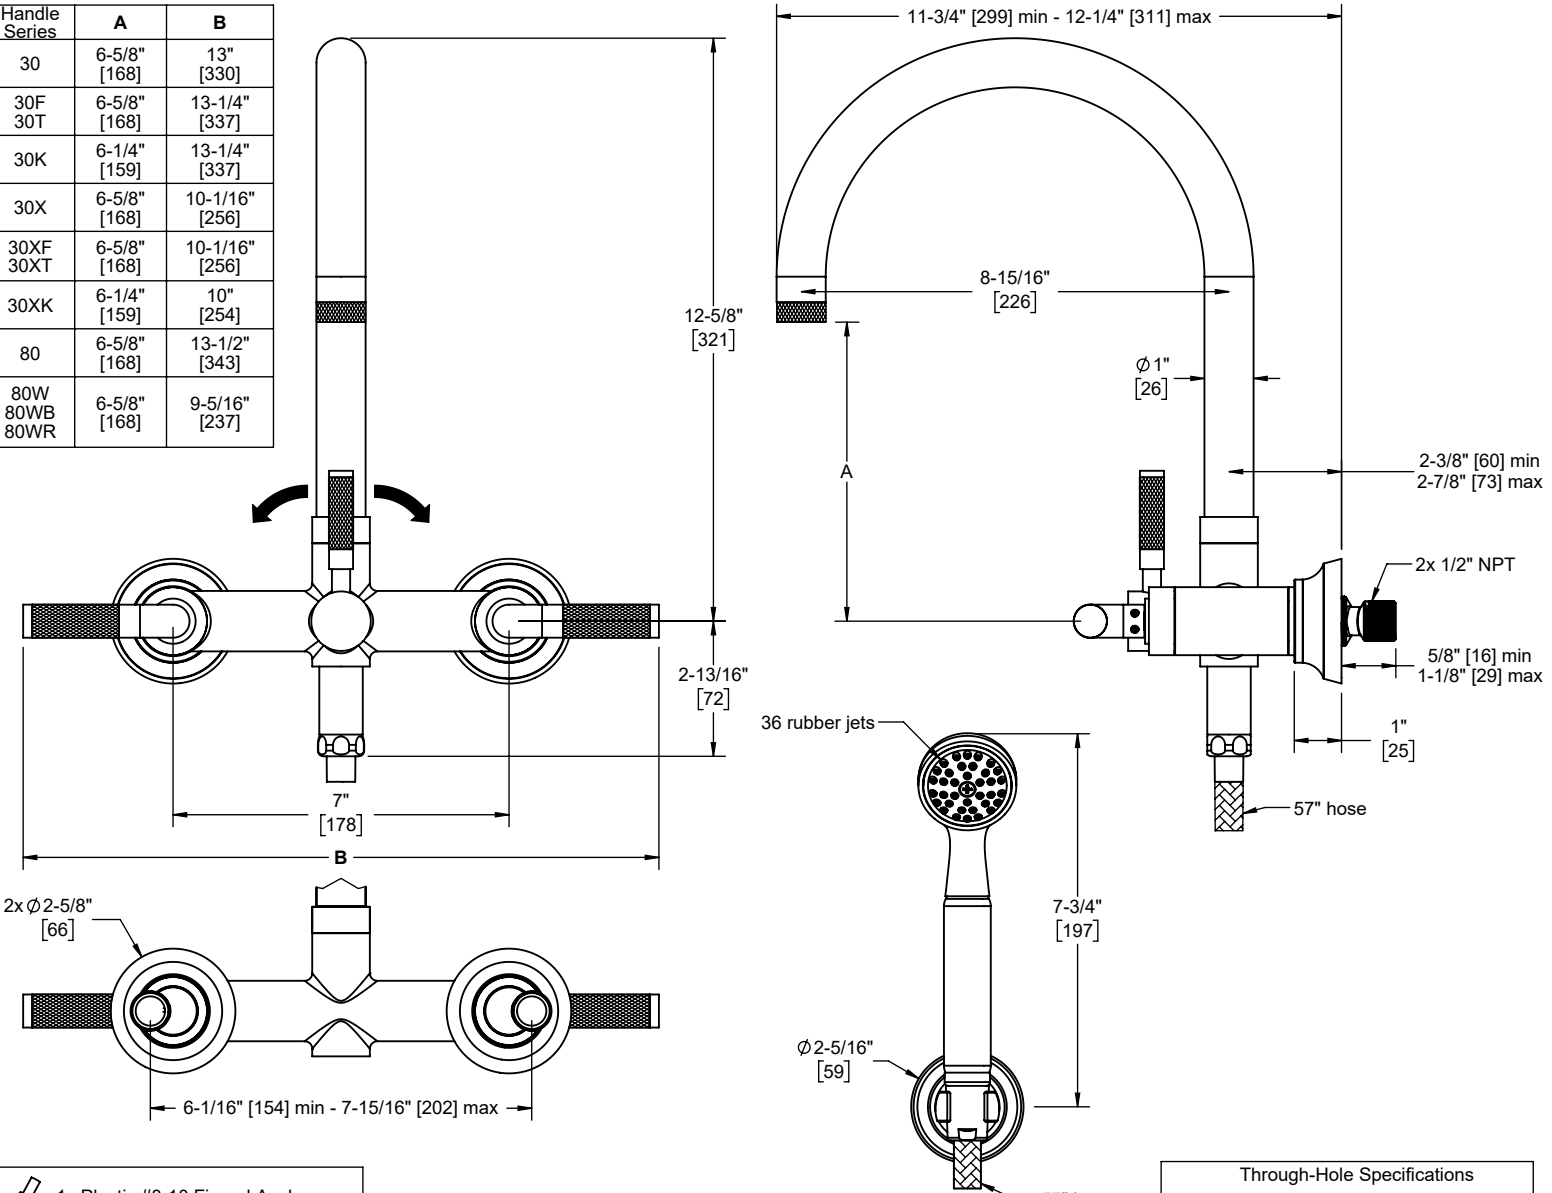

- 1x Plastic #8-10 Finned Anchor
- 1x #10 X 2 Stainless Steel Screw

Through-Hole Specifications		
Min	Recommended	Max
1-13/16" [46]	Ø 1-7/8" [48]	Ø 2" [51]

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice

