


Submitted Model No.: Specific Features:



▲ Designate proper finish suffix

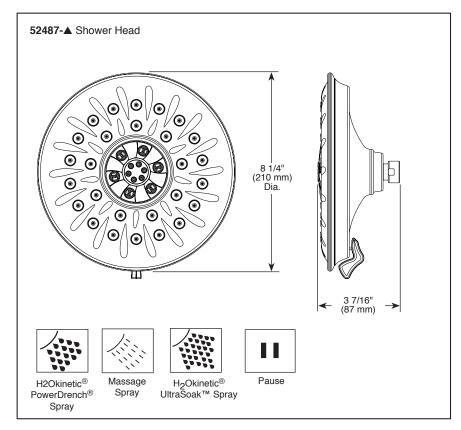

see what Delta can do^{**}

SHOWER HEAD

■ H₂Okinetic[®] Shower Head

FEATURES:

- Touch-Clean[®] Nozzles
- H₂Okinetic® UltraSoak™ Spray
- H₂Okinetic® PowerDrench® Spray

STANDARD SPECIFICATIONS

- Maximum 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa
- Shower head with four spray patterns pause is a nonpositive shut-off
- Lever changes spray settings
- The ball joint swivel angle is 44° (22° per side)
- Metal ball connector for durability, easy installation
- Standard 1/2"-14 NPT pipe fitting

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
 EPA WaterSense[®]