



Submitted Model No.:

### **Specific Features:**



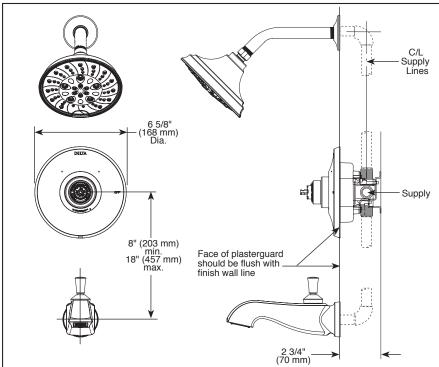

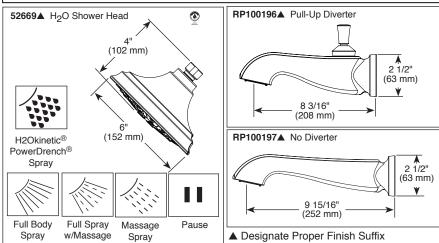

1 1/2"

(38 mm)

H567 Cross Handle

Ė

2 13/16"

(71 mm)

Ė

2 13/16"

(71 mm)



see what Delta can do

# TUB AND SHOWER **FAUCET TRIM**

- Dorval<sup>™</sup> Bath Collection
- Valve Only (T14056-LHP)
- Shower Only (T14256-LHP)
- Tub/Shower (T14456-LHP)

#### **FEATURES:**

- Monitor® 14 Series pressure balanced bath mixing valve
- H<sub>2</sub>Okinetic® Technology shower head

#### **STANDARD SPECIFICATIONS:**

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- Must also order MultiChoice<sup>®</sup> Universal rough separately
- Back to back installation capability
- Solid brass fabricated body
- Temperature only controlled with handle
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- LHP less handle program. See recommended handle options below.
- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Tub port maximum flow rate 6.0 gpm @ 60 psi with R10000-UNBX
- Shower arm overall horizontal length = 7" (178 mm), including threaded ends
- "-LHD" models indicate less showerhead
- 1/2" IPS threaded spout adapter

## **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASSE 1016

Indicates compliance to ICC/ANSI A117.1

EPA WaterSense®

**Delta Faucet Company** 

55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2020 Delta Faucet Company

3 1/4"

(83 mm)

H566 Lever Handle