Shower Faucet Specifications SF-D-01 / SF-D-01G



61934

2 & 3 way independent diverter



FEATURES

Solid brass

Four water inlets/outlets - NPT/sweat or PEX or Wirsbo Test cap

Single diverter body for a 2- or 3-way diverter (shared and non-shared)

Accomodates any wall thickness

Choice of 2-way shared / non-shared 3-way shared / unshared cartridges with or without stops

Single outlet flow rate: 10gpm (38 L/min at 45PSI) Combine outlet flow rate: 12gpm (45 L/min at 45PSI)*


WARRANTY


Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)

CODE & COMPLIANCE





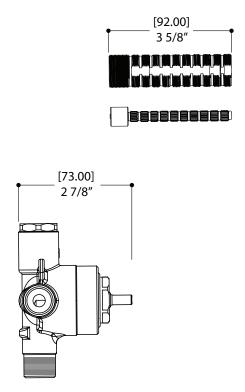

Aquabrass cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice.

Last revision: 10/28/2019 aquabrass.com

93921-93821-93931-93831

Trim set for independent diverter #61934

2-3 way shared functions and 2-3 way non-shared functions



Solid brass plate

Handle included

Diverter with stop



Standard Polished chrome (pc)

Brushed nickel (bn)


Electro black (ebk)

Brushed gold (bgd)


Custom finishes available

WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty (Complete warranty available at www.aquabrass.com/warranty)

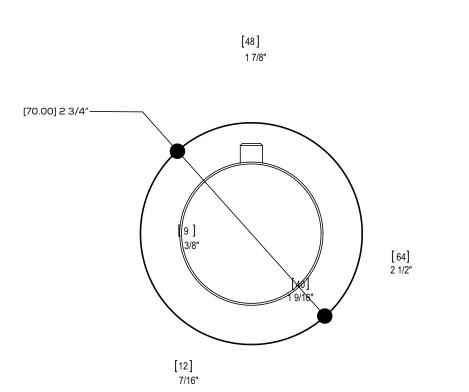

[34] 1 5/16"

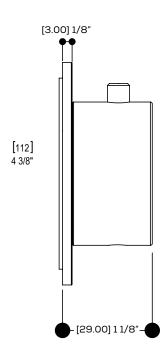

Aquabrass cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice.

last revision: 29/10/2019 aquabrass.com





FEATURES

High flow thermostat cartridge

Universal inlets for 3/4" and 1/2" connections (built-in female threads for 1/2" connections and male threads for 3/4" connections)

Reversible service check valves with filters and improved stop mechanism

Italian made nickel plated solid brass rough and Vernet thermostatic cartridge


Requires **#1206** shut-off valve or **#61934** independent diverter

flow rate: 12 gpm at 45 psi

WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)

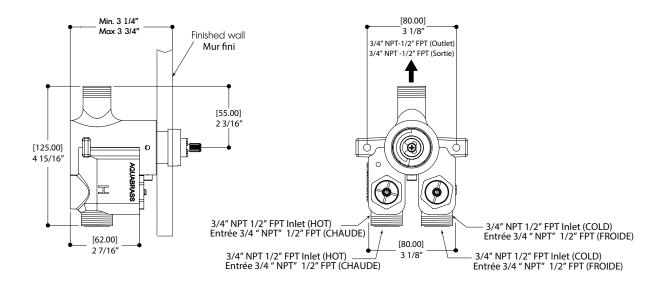

Aquabrass cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice.

Last revision: 10/22/2019 aquabrass.com

round



FEATURES

Solid brass construction screwless decorative trim
Thin contemporary style - 4 1/4" x 7 7/8" x 1/8"
Decorative cylinder (x1) for thermo control included
Handle included
Fits 1/2" thermo valve 12000 - 3/4" thermo valve 3000

FINISHES

Standard


Polished chrome (pc) Brushed nickel (bn)


Custom

15 custom finishes available (ask your local Aquabrass authorized dealer for details)

WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty (Complete warranty available at www.aquabrass.com/warranty)





PLSCM77774

Round shower arm and ceilling drop set



FEATURES

Solid brass construction 1/2" NPT male connection

FINISHES


Standard Polished Chrome (pc) Brushed Nickel (bn)


WARRANTY

Residential: Residential: Limited lifetime warranty to original purchaser commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)



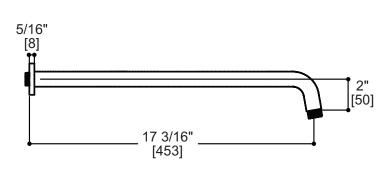



Aquabrass cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice.

rainhead 710

10" round rainhead



Solid brass construction Silicone spray nozzles for easy cleaning water-saving air induction system 1/2" NPT female connection

Flow rate:2.5 gpm



Standard


Polished Chrome (pc) Brushed Nickel (bn) Electro Black (ebk) Brushed Gold (bgd)


Custom finishes available

WARRANTY


Residential: Residential: Limited lifetime warranty to original purchaser commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)





complete shower rail

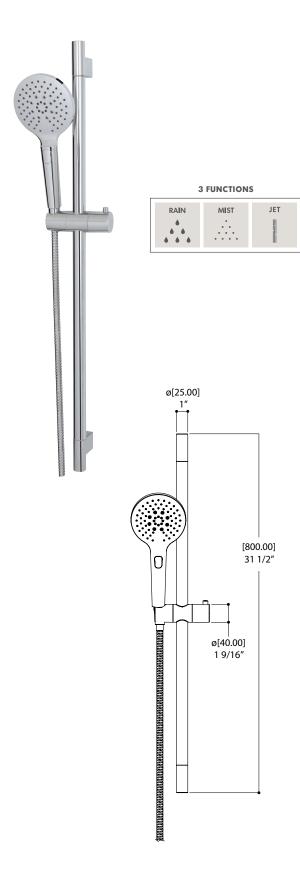

FEATURES

Round rail with adjustable sliding hook Push button 3 functions: rain, mist, jet 5' to 6' expandable braided hose

Flow rate: 2.5 gpm Height: 31 1/2"

FINISHES


Standard

Polished chrome (pc) Brushed nickel (bn) Electro black (ebk)

WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)



Aquabrass cannot be held responsible for any technical or typographical errors or omissions contained within this document and reserves the right to make changes without prior notice.

AQUABRASS adjustable waterway 1409



FEATURES

Thermo insulation body 5/8" trim adjustement to elbow installation 1/2" NPT female connection

FINISHES

Standard

Polished chrome (pc) Brushed nickel (bn)


15 Custom finishes available (ask your local Aquabrass authorized dealer for details)

WARRANTY

Residential: Limited lifetime warranty to original purchaser

Commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)

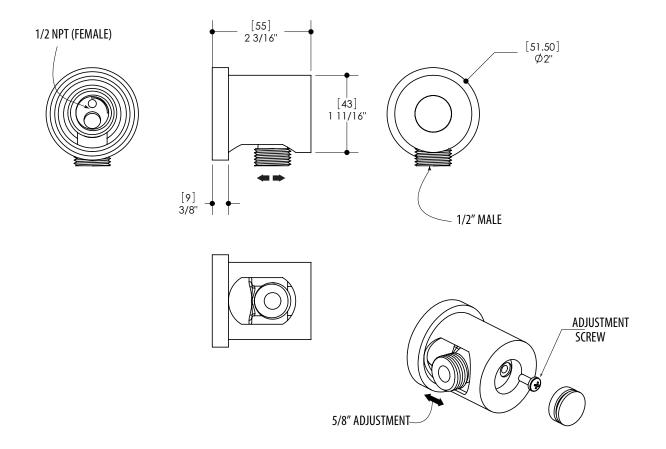

Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc. Last revision: 13/09/2016 aquabrass.com

adjustable waterway 1409

round

EXPLOSION PARTS

