



**Features**

- 25+ artisan finishes including 12 PVD finishes
- All brass construction including sprayhead
- 360° rotating spout with magnetic sprayhead docking
- One button control for aerated or spray stream
- Spray jets have easy-to-clean surface
- Quiet polymer-braided hose with rotating joint
- Ceramic disc cartridge
- Max flow rate: 1.8 gpm (6.8 L/min)

**Codes/Standards Applicable**

Product meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant



**K30-103-FL**  
**K30-103-KL**  
**K30-103-SL**  
**K30-103-TL**



K30-103-FL shown

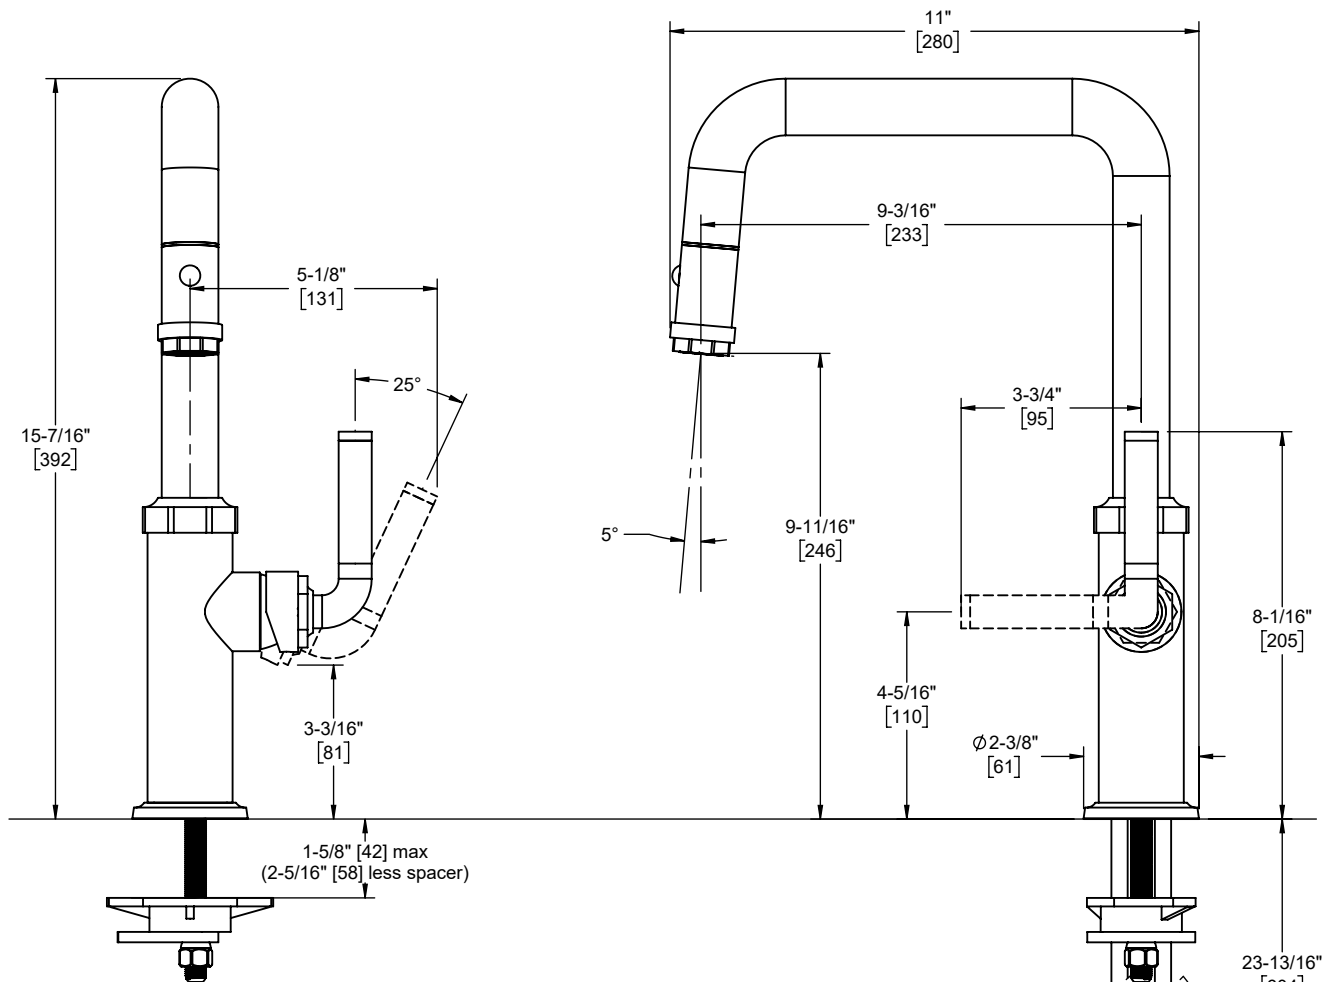

Through-Hole Specifications		
Min	Recommended	Max
Ø 1-1/4" [32]	Ø 1-3/8" [35]	Ø 1-3/8" [35]

Specifications subject to change without notice

3/8" compression fittings  
Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]