


# Low Threshold Shower 60" x 30" **Ella Plus 36** - Left or Right Drain

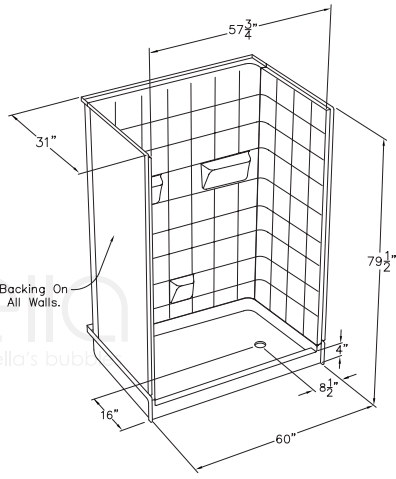

**Flat Wall Option**

**Model #**

6030 SH 5P 4.0 L-WH SP36	6030 SH 5P 4.0 R-WH SP36
6030 SH 5P 4.0 L-BN SP36	6030 SH 5P 4.0 R-BN SP36
6030 SH 5P 4.0 L-B SP36	6030 SH 5P 4.0 R-B SP36

**Ella Plus 36 Accessories** (page 2):  
*Hansgrohe & Ponte Giulio are optional*

 <i>German Engineering</i>	 <i>Italian Design</i>
---	--

Outside Dimensions: 60" L x 31" W x 79.5" H  
 Shipping Dimensions: 60" L x 48" W x 72" H  
 Shipping Weight: 450 lbs.  
 Net Weight: 437 lbs.  
 Threshold Height: 4.0"

**Package Options:**

- White (W), Bone (BN) or Biscuit (B) Shower Panels
- Standard, Plus 24, Plus 36, Freedom, Deluxe, or Elite (premium fixtures in white, brilliant or satin)
- Flange Trim Molding Kit
- Multi-Piece Window Trim Kit
- Flat Wall Option: no soap ledges

**Panels:**

Shower Base .....	31" W x 60" L x 4" H
Side Wall Panel Left .....	31" W x 79.5" H
Side Wall Panel Right.....	31" W x 79.5" H
Rear Wall Top Panel.....	60" L x 35.5" H
Rear Wall Bottom Panel.....	60" L x 44" H

**Features:**

- Premium marine grade gel-coat, five piece shower with 8" classic tile pattern
- Wood and steel reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations)
- Easy shower wall assembly pin-lock system allowing front side installation
- Precision fit wall panel seams (match into grout pattern)
- Grip-Sure™ floor texture
- Molded soap ledges
- Self supporting, pre-leveled shower base (no mudset required)
- Shower door friendly (squared corners allow door installation)
- Ships pre-assembled, heavy duty crating protects product in transit

**Accessories:**

- [1] Three (3) 36" Fine Finished Stainless Steel Grab Bars
- [2] 24" x 16" Four-Legged Foldup Seat, 500 lb. cap
- [3] 2" Chrome strainer brass drain with friction seal

**Codes:**

IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA





**Warranty:**

30 Year Limited Lifetime Warranty (on shower panels)\*

\*For more information please visit [www.ellasbubbles.com](http://www.ellasbubbles.com)

<p>1.</p> 	<p>2.</p> 	<p>3.</p> 	
<p>Fine Brushed Stainless Steel Concealed Flange Grab Bars</p>	<p>Four Legged Foldup Seat (500 lbs. Weight Capacity)</p>	<p>2" Chrome Strainer Brass Drain with Friction Seal</p>	


Low Threshold Shower 60" x 30"  
**6030 SH 5P 4.0** - Left or Right Drain

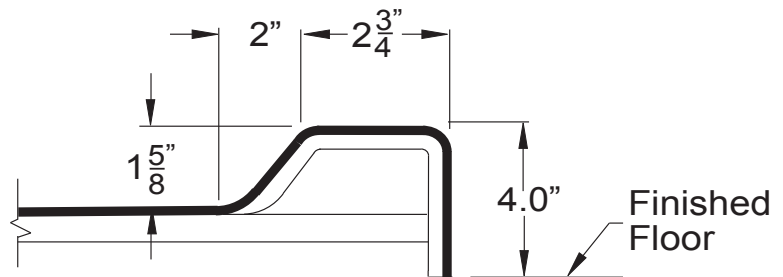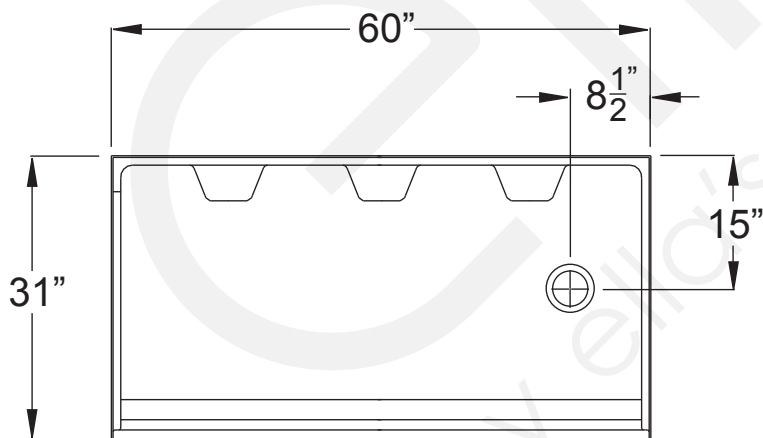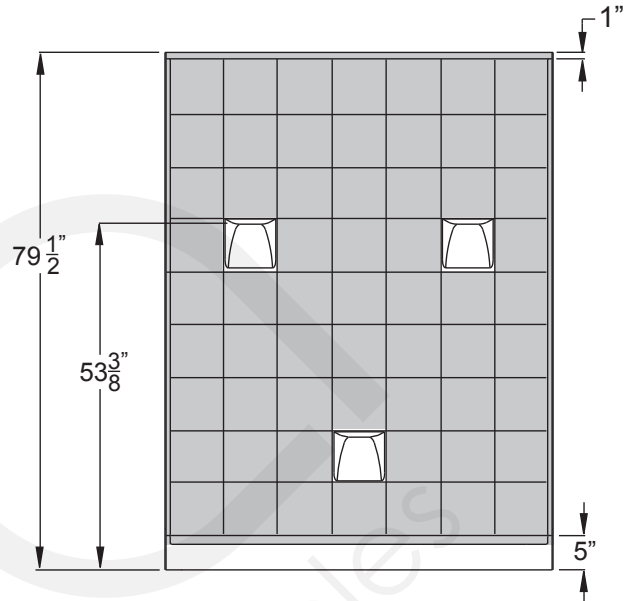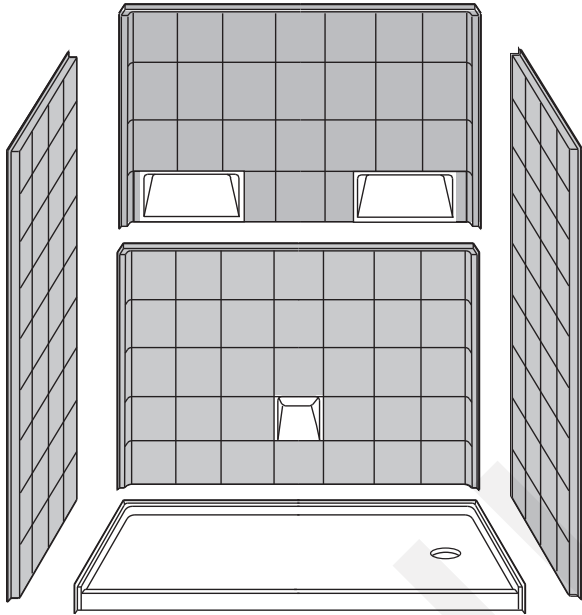

# Low Threshold Shower Features

## STRENGTH

Wood & Steel Reinforced Walls

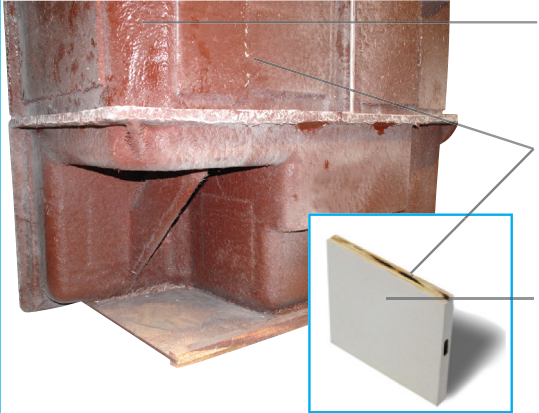

Fiberglass resin structural substrate cures to a seamless strong encasement.

All panels are backed with 3/8" wood, accessories can be installed anywhere.

Premium Marine-grade Gel-coat fiberglass surface for beautiful, long-lasting shower surface.


Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our competitors.

Wood reinforced core walls and high density base.

## ADAPTABILITY

Customized Accessory Placement

The wood reinforced core walls allow the fixtures to be installed right onto the wall studs by eliminating the need for a drywall backing.

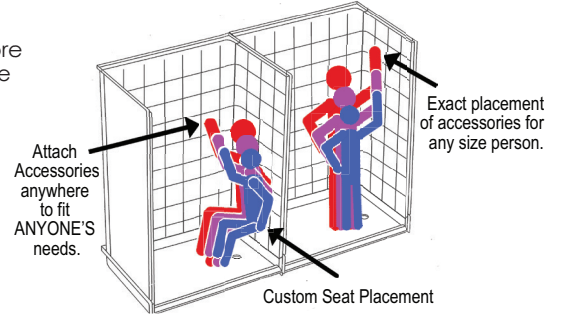

## SHOWER DOOR FRIENDLY

Your choice: Curtain or Door

Square corners in Ella shower construction allow for framed or frameless shower doors to be installed.


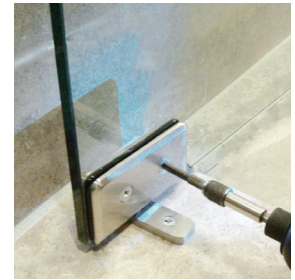


Image for illustration only

## FRONT SIDE INSTALLATION

Aluminum Pin and Slot System for a contractor friendly front side installation.

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.

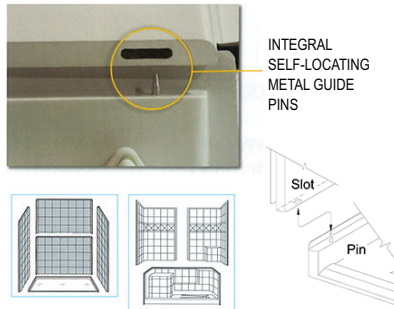

## AVAILABILITY

Your Project won't be held up

Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.

Rush orders are available upon request (white only).

No order is too big or small.



In stock for Rapid Ship


## SMART PACKING

## 4" LOW THRESHOLD DETAILS


Gelcoat fiberglass surface creates the smooth, beautiful, long-lasting shower surface

Polyurethane reinforcement, machined to a flush, level surface

Fiberglass resin structure substrate cures to a strong, seamless encasement shell

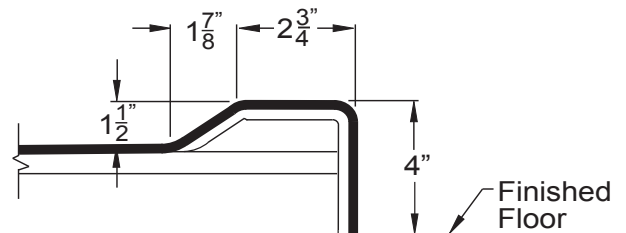

# Low Threshold Shower 60" x 33" Ella Plus 36 - Left or Right Drain

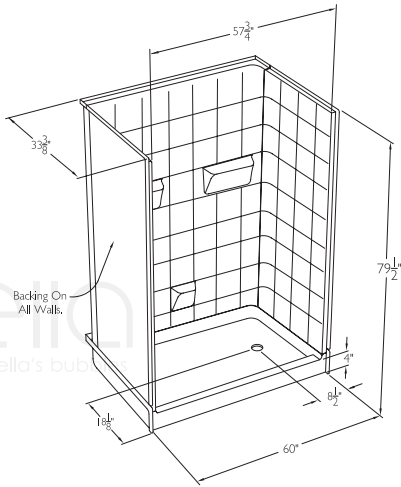

**Flat Wall Option**

**Model #**

6033 SH 5P 4.0 L-WH SP36	6033 SH 5P 4.0 R-WH SP36
6033 SH 5P 4.0 L-BN SP36	6033 SH 5P 4.0 R-BN SP36
6033 SH 5P 4.0 L-B SP36	6033 SH 5P 4.0 R-B SP36

**Ella Plus 36 Accessories** (page 2):  
*Hansgrohe & Ponte Giulio are optional*

 <i>German Engineering</i>	 <i>Italian Design</i>
---	--

Outside Dimensions: 60" L x 33.375" W x 79.5" H  
 Shipping Dimensions: 60" L x 48" W x 72" H  
 Shipping Weight: 450 lbs.  
 Net Weight: 437 lbs.  
 Threshold Height: 4.0"

**Package Options:**

- White (W), Bone (BN) or Biscuit (B) Shower Panels
- Standard, Plus 24, Plus 36, Freedom, Deluxe, or Elite (premium fixtures in white, brilliant or satin)
- Flange Trim Molding Kit
- Multi-Piece Window Trim Kit
- Flat Wall Option: no soap ledges

**Panels:**

Shower Base .....	33.375" W x 60" L x 4" H
Side Wall Panel Left .....	33.375" W x 79.5" H
Side Wall Panel Right .....	33.375" W x 79.5" H
Rear Wall Top Panel .....	60" L x 35.5" H
Rear Wall Bottom Panel .....	60" L x 44" H

**Features:**

- Premium marine grade gel-coat, five piece shower with 8" classic tile pattern
- Wood and steel reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations)
- Easy shower wall assembly pin-lock system allowing front side installation
- Precision fit wall panel seams (match into grout pattern)
- Grip-Sure™ floor texture
- Molded soap ledges
- Self supporting, pre-leveled shower base (no mudset required)
- Shower door friendly (squared corners allow door installation)
- Ships pre-assembled, heavy duty crating protects product in transit

**Accessories:**

- [1] Three (3) 36" Fine Finished Stainless Steel Grab Bars
- [2] 24" x 16" Four-Legged Foldup Seat, 500 lb. cap
- [3] 2" Chrome strainer brass drain with friction seal

**Codes:**

IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA

**Warranty:**

30 Year Limited Lifetime Warranty (on shower panels)\*



\*For more information please visit [www.ellasbubbles.com](http://www.ellasbubbles.com)

# Low Threshold Shower 60" x 33"



## Ella Plus 36 Accessories

<p>1.</p> 	<p>2.</p> 	<p>3.</p> 	
<p>Fine Brushed Stainless Steel Concealed Flange Grab Bars</p>	<p>Four Legged Foldup Seat (500 lbs. Weight Capacity)</p>	<p>2" Chrome Strainer Brass Drain with Friction Seal</p>	

# Low Threshold Shower 60" x 33" 6033 SH 5P 4.0 - Left or Right Drain

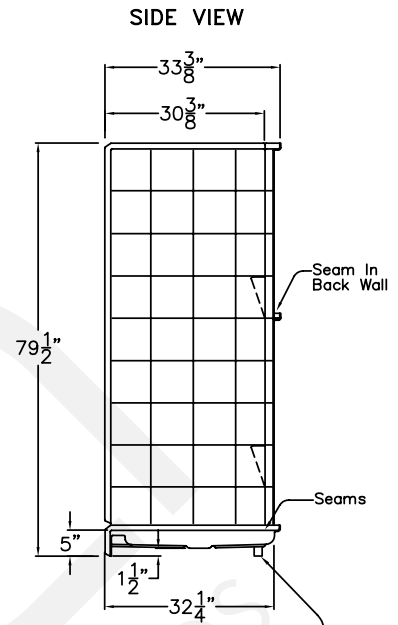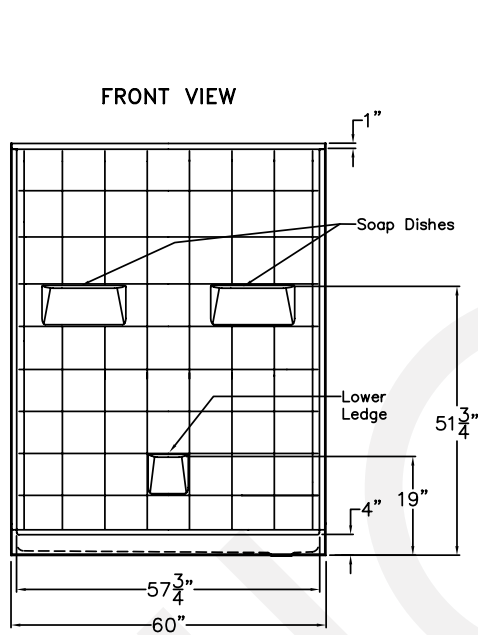

Wood Base with Leveling Leg  
Wood bottom with leg will have the base level as it sits on the floor.

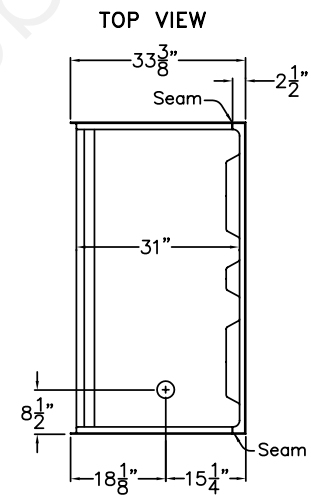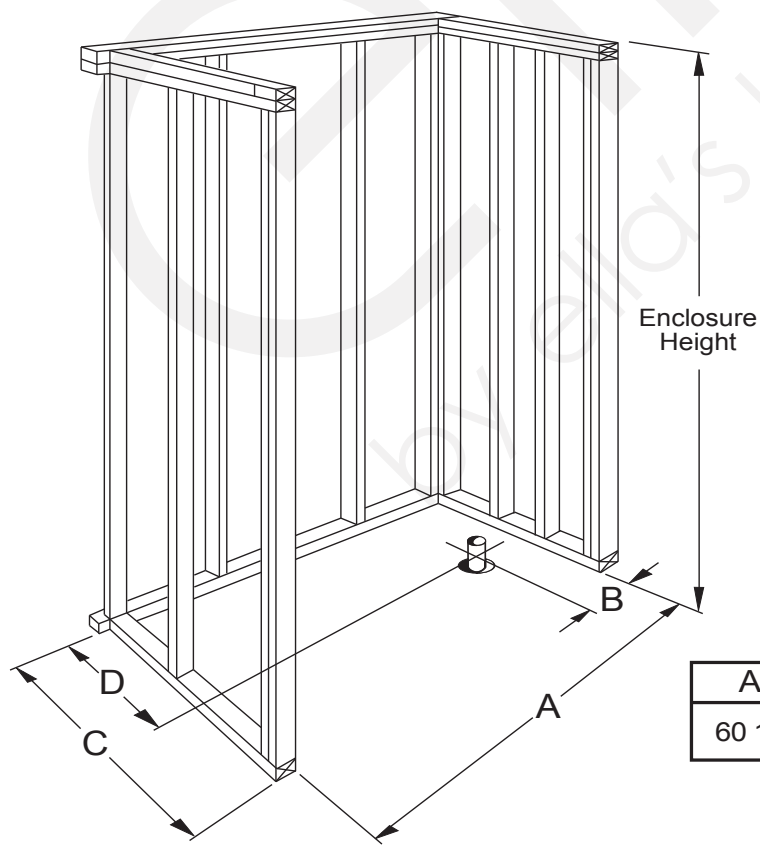


A	B	C	D
60 1/4"	8 1/2"	33 3/8"	15 1/4"



# Low Threshold Shower Features

## STRENGTH

Wood & Steel Reinforced Walls

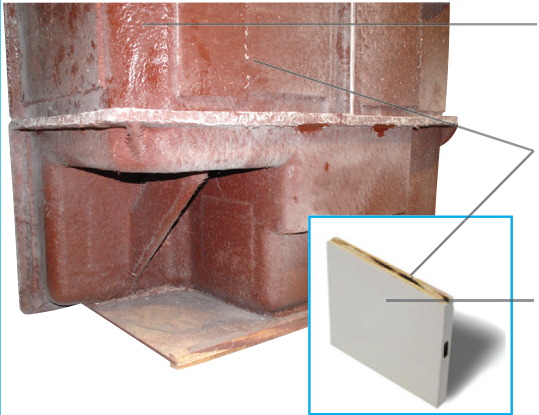

Fiberglass resin structural substrate cures to a seamless strong encasement.

All panels are backed with 3/8" wood, accessories can be installed anywhere.


Premium Marine-grade Gel-coat fiberglass surface for beautiful, long-lasting shower surface.

Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our competitors. Wood reinforced core walls and high density base.

## ADAPTABILITY

Customized Accessory Placement

The wood reinforced core walls allow the fixtures to be installed right onto the wall studs by eliminating the need for a drywall backing.

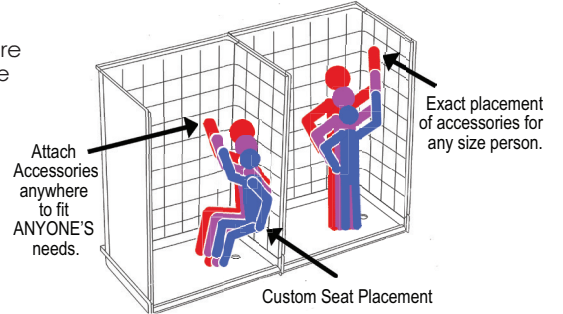

## SHOWER DOOR FRIENDLY

Your choice: Curtain or Door

Square corners in Ella shower construction allow for framed or frameless shower doors to be installed.





Image for illustration only

## FRONT SIDE INSTALLATION

Aluminum Pin and Slot System for a contractor friendly front side installation.

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.

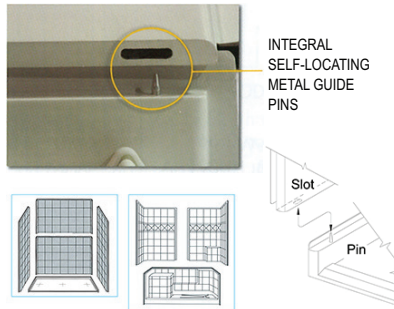

## AVAILABILITY

Your Project won't be held up

Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.

Rush orders are available upon request (white only). No order is too big or small.



In stock for Rapid Ship

## SMART PACKING

## 4" LOW THRESHOLD DETAILS

Gelcoat fiberglass surface creates the smooth, beautiful, long-lasting shower surface

Polyurethane reinforcement, machined to a flush, level surface

Fiberglass resin structure substrate cures to a strong, seamless encasement shell

