dals

LED SUPERPUCK

4001, 4002






AVAILABLE FINISHES

WH BK SN White Black Satin Nickel

PRODUCT DIMENSIONS

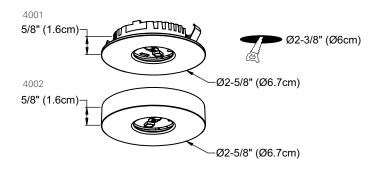

SPECIFICATIONS

2 high power white LEDs for a total consumption of 3W (3000°K) Over 50,000 hours of service life

12" (30cm) input lead with quick connector

24" (61cm) interconnection harness included

12V DC - LED driver required

Dimmable with most regular dimmers (12V magnetic dimmer suggested) when used with power supply # ETR-33WDIMLED (see p. 12)

Heat sink and thermal protection

KEY FEATURES

Warm white light

Excellent color rendering

Superior LED performance and lifespan

Smooth 360° wide spread

Minimal heat emission

Extra low profile

Very discreet light source

Brighter than most 25W halogen

equivalent pucks

Aluminum construction

Frosted glass lens

INSTALLATION TIPS

4001 is for recessed installation only, in any direction

4002 is for surface mounting only in any direction

Ideal for accent lighting inside or under any cabinet, shelf or display

Its very low profile makes it very easy to hide even in shallow structures

For power supplies and installation accessories, see p. 14



Order No K4001 or K4002 3x 4001 or 4002 and 10W plug-in LED transformer with connection harness included

