



# Square flush mount

Our LED flush mounts incorporate Edge-Lit technology, eliminating hot spots or glare. With 3 sizes to choose from, every application is covered.



**JA8**  
CERTIFIED

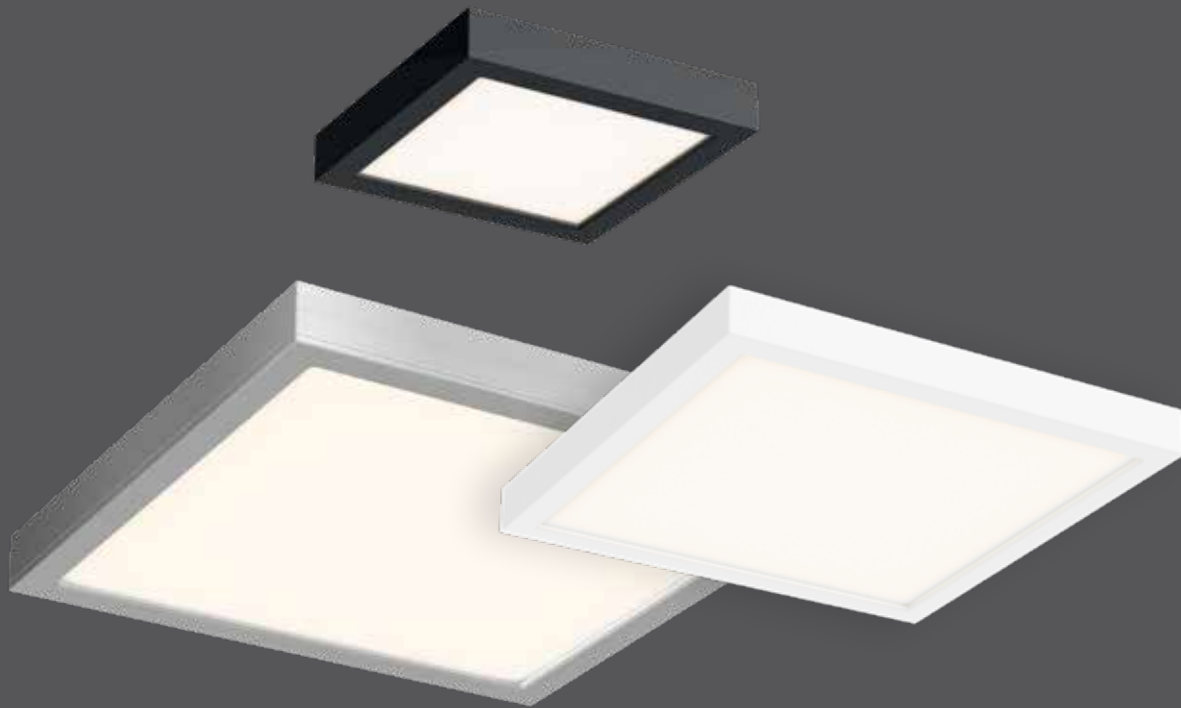

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
CFLEDSQ06-CC	6"	11 W	700 lm	750 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
CFLEDSQ10-CC	10"	17 W	1000 lm	1200 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
CFLEDSQ14-CC	14"	26 W	1600 lm	2100 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V

### Specifications

Integrated dimmable driver  
 Over 50,000 hours of service life  
 Switch-selectable CCT: 2700 K/  
 3000 K/3500 K/4000 K/5000 K in canopy  
 Smooth 360° wide spread  
 Minimal heat emission  
 Frosted lens  
 Edge-lit technology  
 Cast aluminum construction  
 Suitable for wet locations  
 Refer to website for dimmer compatibility  
 Ideal operating temperature:  
 -20° to 40° C  
 5-year warranty

### Finish

- **BK** Black
- **SN** Satin Nickel
- **WH** White

### Order example


**CFLEDSQ06-CC-WH**  
 CFLEDSQ06 6" square ceiling flush mount  
 in a white finish

### Note


Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALs representative for more information.



### CFLEDSQ06-CC



### CFLEDSQ10-CC



### CFLEDSQ14-CC

