# 72" MARSHALL CAST IRON DOUBLE SLIPPER TUB WITH BASE

Cat. No.





L: 72 " L (Base): 47" W: 30-½" W (Base): 23-1/2"

H: 30" (from floor to top of tub)

H(Base): 7-1/2"

# The following is recommended for CTDSHB tubs with deck holes:

- ■Rim-mounted faucet: part #4601
- ■Straight bath supplies: part #5577
- ■Leg tub drain: part #5599

#### Note

To prevent the accumulation of standing water under your tub base we recommend using a bead of silicone between the base and the floor.

Gallon Capacity: 43
Shipping Weight: 740 lbs.
Empty Weight: 490 lbs.
Filled Weight: 854 lbs.

#### Interior bottom


L: 36" W: 16-1/2"

H:16-3/4"- Drain to rim

H: 11-3/4"- Drain to bottom OF


## Features:

- ► Inside finish is white enamel
- ▶7" deck holes in long side of tub
- ▶ Pre-drilled overflow hole
- ► Rim: 3-1/4"
- ► Tub exterior is white
- ► Non-skid strips
- ► Cutout in base for waste and overflow






**Custom Colors Available** (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color







Dimensions of fixture are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. Dimensions and specifications subject to change without notice.

# **TUB RIM MOUNT FILLER WITH HANDSHOWER**

Cat. No. 4601







- ► Brass construction
- ► Elephant spout length is 5-3/4"
- ► Flow rate is 3.7 GPM
- ► Available with porcelain lever (4601- PL) or metal cross lever handles (4601-MC)
- ► Telephone handshower with cradle and hose
- ► Handshower flow rate 2.5 GPM
- ► Handshower includes backflow preventer
- ▶6" Elbow mounts included
- ► IAPMO approved
- ▶7" Centers for deck mounting on acrylic or cast iron tubs
- ▶ 1/4 Turn ceramic disc cartridges
- ► To be used with straight bath supplies, Part #5577

## Finishes:


BP **Polished Brass** Polished Chrome CP


**Brushed Nickel** 

PN Polished Nickel **ORB** Oil Rubbed Bronze







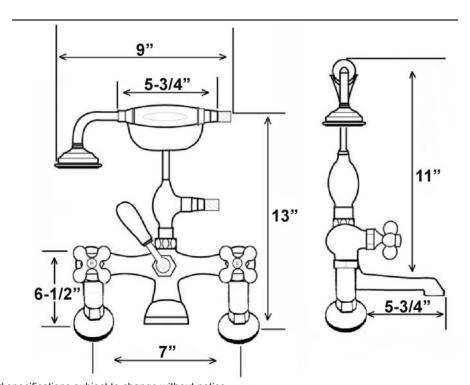

Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.

# TUB RIM MOUNT FILLER WITH HANDSHOWER


Cat. No. 4603







6" Elbow Mounts



## Features:

- ▶ Brass construction
- ► Elephant spout length is 5-¾"
- ► Flow rate is 3.7 GPM
- ► Available with metal cross handles (4603-MC) or metal lever handles in 2 different styles (4603-ML, 4603-ML2)
- ► Metal cross handles feature "H" and "C" for hot and cold
- ► Metal telephone style hand shower with cradle and hose
- ► Handshower flow rate is 2.5 GPM
- ► Handshower includes backflow preventer
- ▶6" Elbow mounts included
- ▶7" Centers for deck mounting on acrylic or cast iron tubs
- ▶ 1/4 Turn ceramic disc cartridges
- ► To be used with straight bath supplies, Part #5577

#### Finishes:

**BP** Polished Brass

PN Polished Nickel

**CP** Polished Chrome

**ORB** OilRubbedBronze

**SN** Brushed


Nickel



(ML)



(ML2)

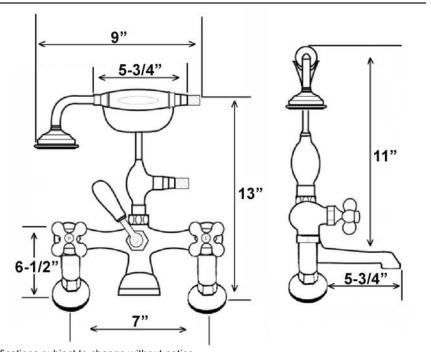

Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.

# STRAIGHT BATH SUPPLIES

Cat.No. 5577





H: 24"

OD: 1/2"

**Interior Dimensions:** 

Basin Interior: 13" x 11 7/8"

Basin Depth: 7 1/2"

Mount bolts height: 30"

Mount holes cc: 6"

Spout hole: 1 3/8"

## Features:


- ▶ For use with faucets mounted to the tub deck
- ► No stops
- ► ½" Compression inlet
- ▶¾" Compression outlet
- ► Bottom flange 2-1/2" diameter
- ▶ 0.500" Outer diameter
- ▶ 0.400" Inner diameter
- ▶ 0.030" Thickness of the wall
- ► Available in 5 Finishes

#### Finishes:

CP Polished ChromeSN Brushed NickeBP Polished BrassORB Oil Rubbed BronzePN Polished Nickel

## Compliance Certification

Meets or exceeds the following specifications: ASME-A112 (and 19.6M) for Vitreous china fixtures. ASME 112.19.9M for fire clay fixtures.

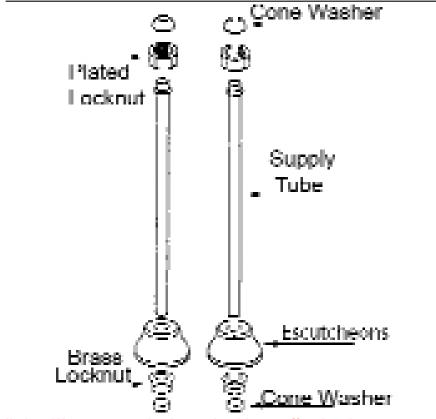

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions and specifications subject to change without notice.

# LEG TUB DRAIN

Cat. No. 5599






Escutcheon Height: 1-1/4"

## **Features:**

- ► Twist-and-lift stopper
- ► Includes deep escutcheon
- ► Height adjustable 15"-18"
- ▶ Depth adjustable 12"-14"
- ► Includes deep escutcheon
- ►IAPMO approved
- ► Available in 5 Finishes

#### Finishes:

CP Polished ChromeBP Polished BrassSN Brushed NickelPN Polished NickelORB Oil Rubbed Bronze

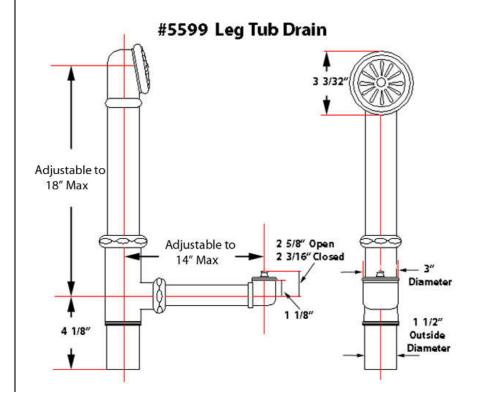

Dimensions and specifications subject to change without notice.