TS081 |

## INSTALLATION GUIDE

trova shower set

BRUSHED NICKEL(BN)













### OPERATING SPECIFICATIONS

trova shower set



#### **FEATURES**

Solid Brass

#### **OPERATING PRESSURE**

Minimum: 15 psi Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer



### **OPERATING TEMPERATURE**

Maximum: 176°

#### **FLOW CAPACITY**

Shower Head: 1.8 USGPM

F901-8 APPROVAL









### PRODUCT DIMENSIONS


trova shower set for F903B-58TK

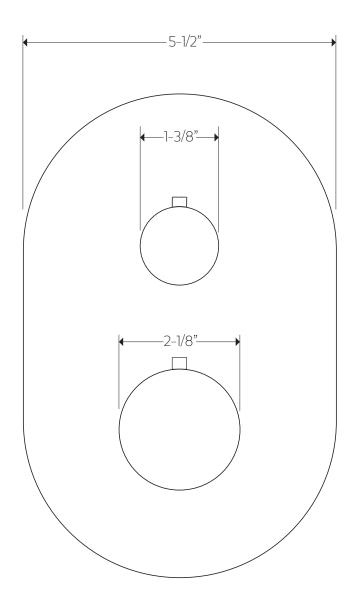


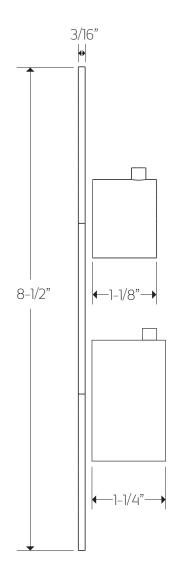

TS081 |

### PRODUCT DIMENSIONS

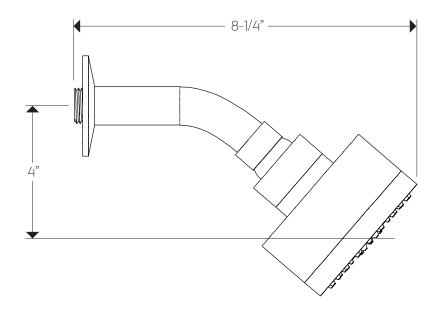









TS081 |

## PRODUCT DIMENSIONS

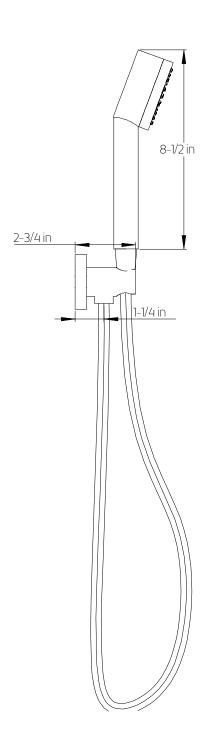


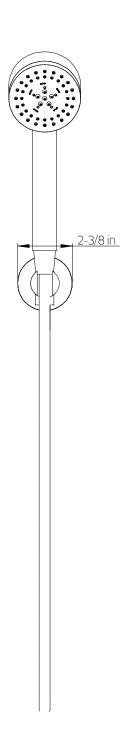





## INSTALLATION STEPS


trova shower set for F903B-58TK

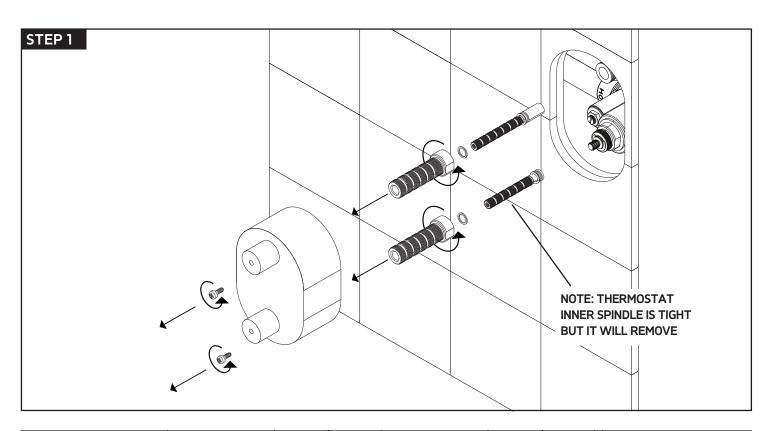

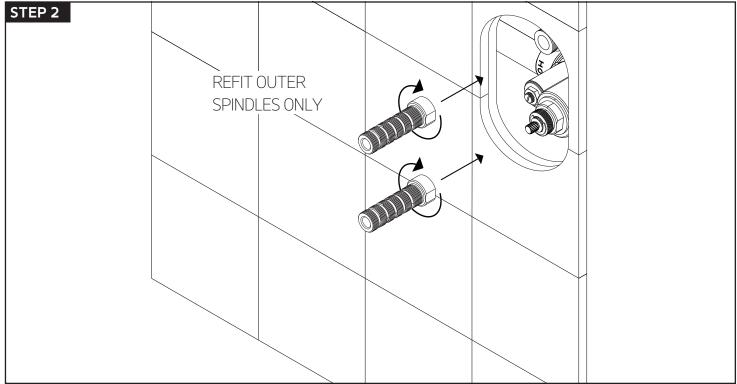


TS081

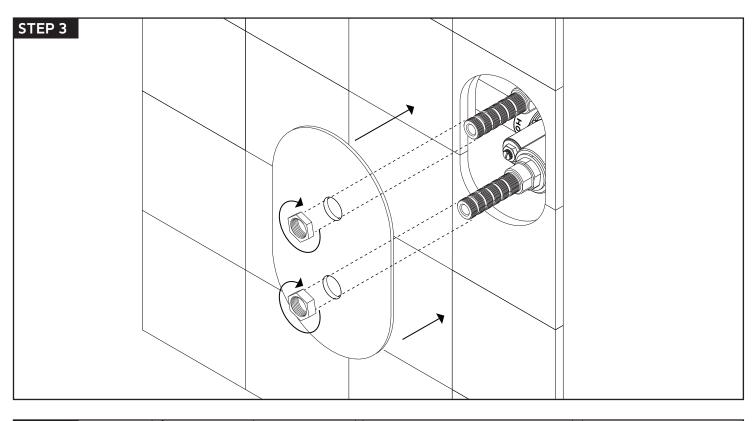


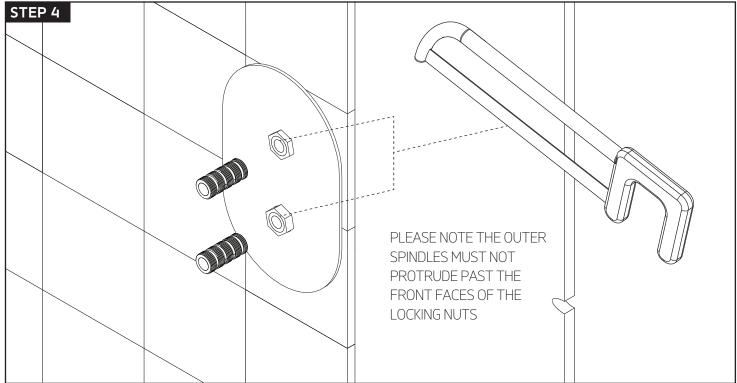

### INSTALLATION STEPS

for F903B-58TK

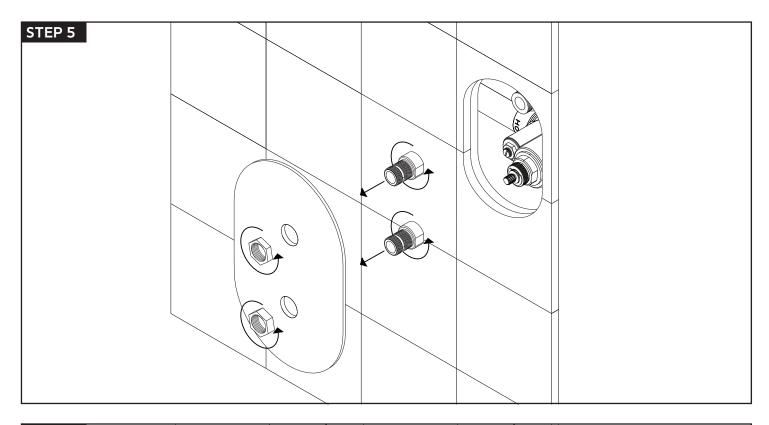

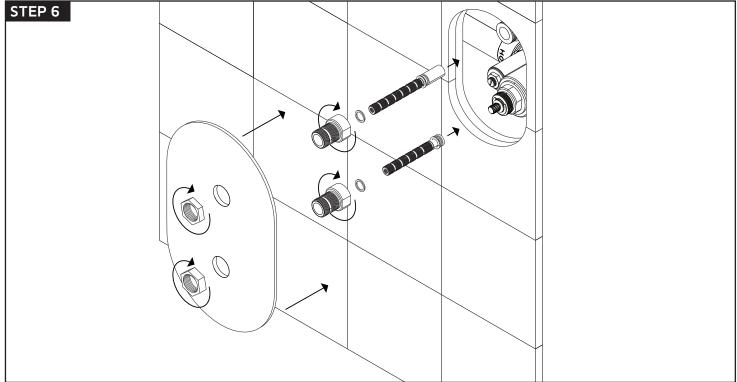



WESTOVER, INC



### INSTALLATION STEPS

trova shower set for F903B-58TK

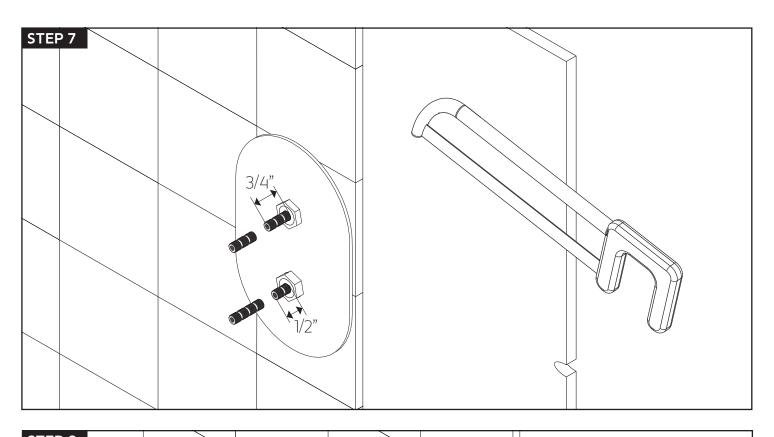


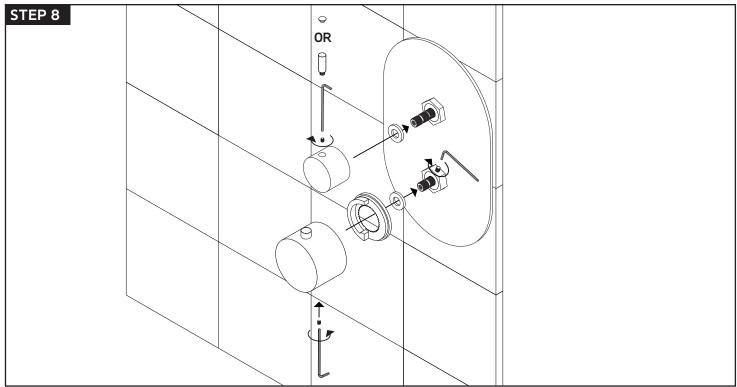




### INSTALLATION STEPS

trova shower set

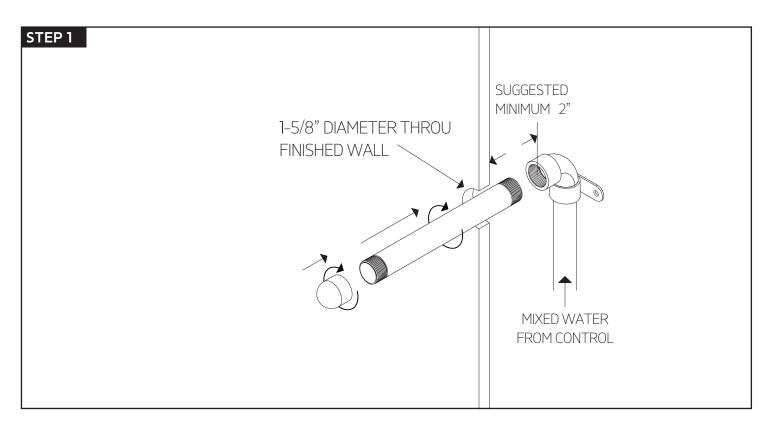


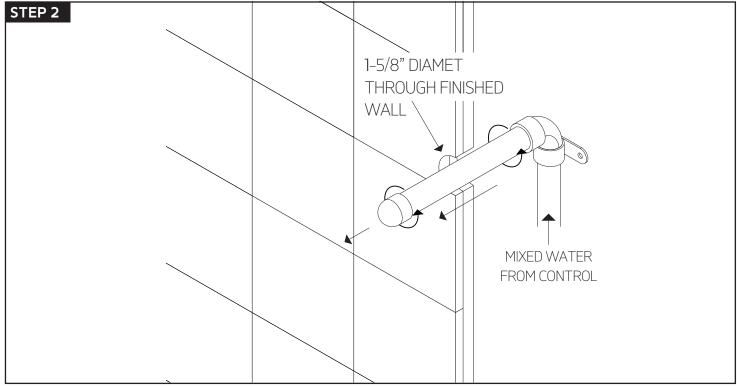


WESTOVER, INC

TS081


### INSTALLATION STEPS

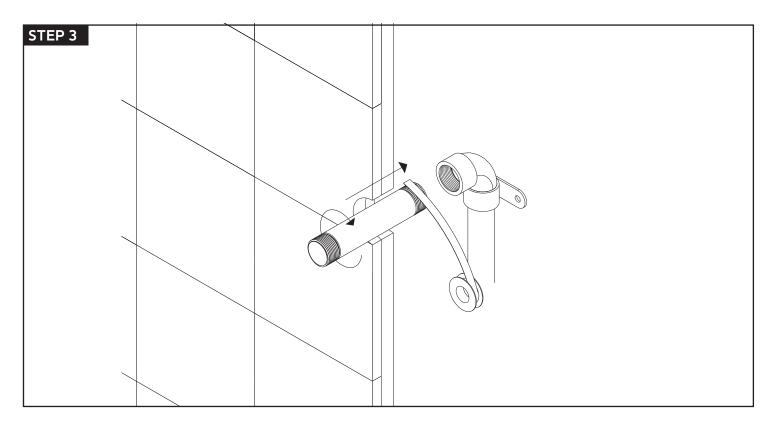

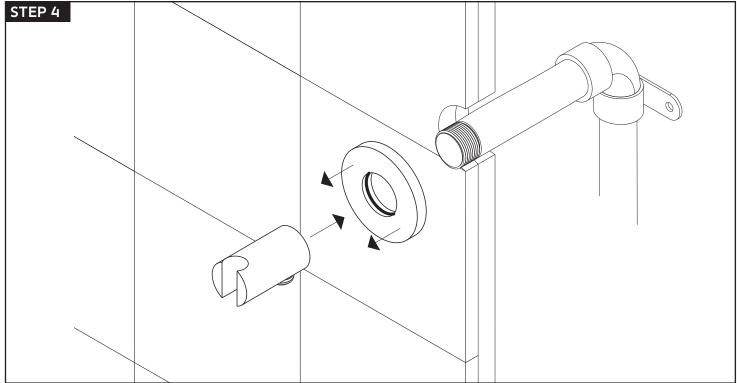




### INSTALLATION STEPS

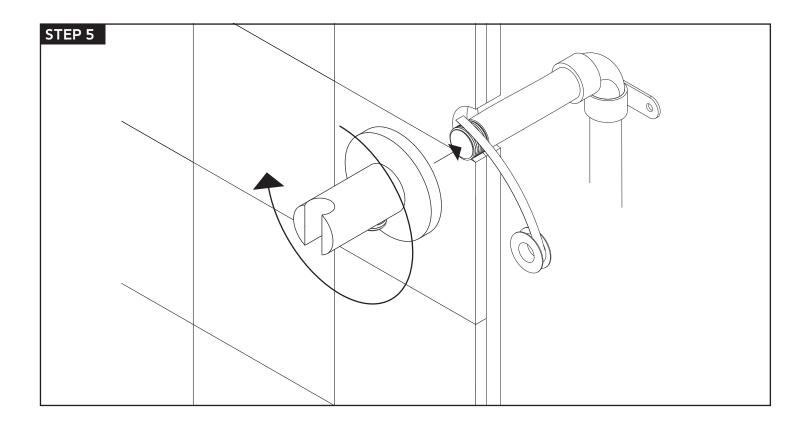




## INSTALLATION STEPS

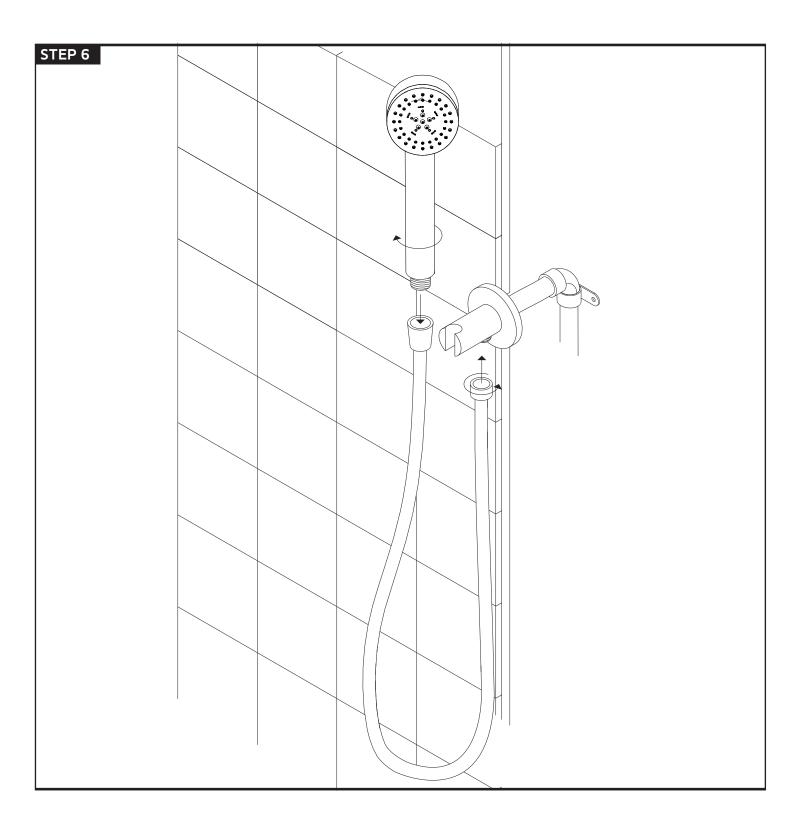



#### PARTS BREAKDOWN

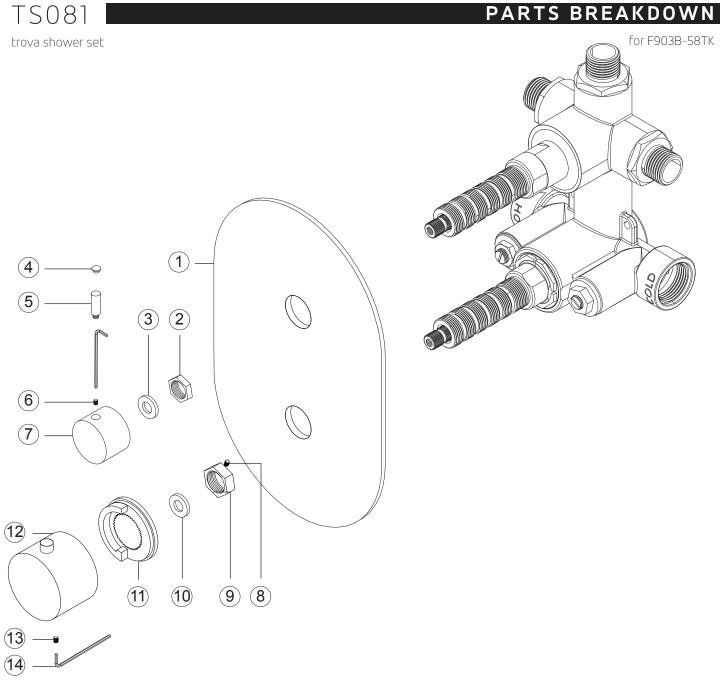

- 1) ESCUTCHEON
- 2) DIVERTER LOCKING NUT
- **NYLON WASHER**
- 4) HANDLE HOLE CAP
- 5 DIVERTER HANDLE LEVER
- **DIVERTER SET SCREW**
- **DIVERTER HANDLE**

- (8) LOCKING NUT SET SCREW
- THERMOSTAT LOCKING NUT
- (10) **NYLON WASHER**
- (11) TEMPERATURE LIMITING RING
- (12) THERMOSTAT HANDLE
- THERMOSTAT SET SCREW
- **ALLEN WRENCH**

