

4-012



## PRODUCT FEATURES


- Style: Transitional
- Collection: Transition
- Temperature Controlled By Thermostatic
- Cross Handles


.

# ■ TECHNICAL DETAILS

ADA Compliance: Yes
Access Hole: 3" x 8"
Number of Handles: 2
Handle Spread: 5"
Top Handle Turn Angle: Quarter Turn
Bottom Handle Turn Angle: 115° - 118°
Installation Type: Wall Mounted
Primary Material: Brass
Valve Material: Ceramic
Flow Restriction: 6.5 gpm
Water Pressure Maximum: 85 PSI
Water Pressure Minimum: 20 PSI
Water Pressure Recommended: 60 PSI

## PRODUCT DIMENSIONS

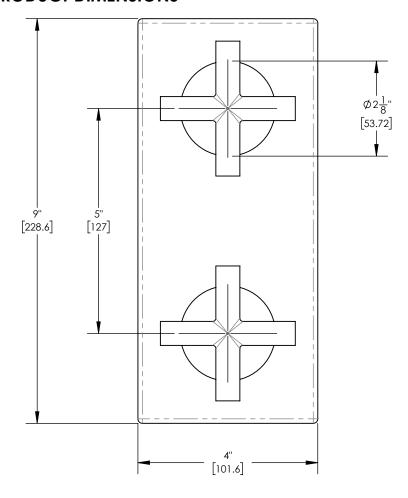

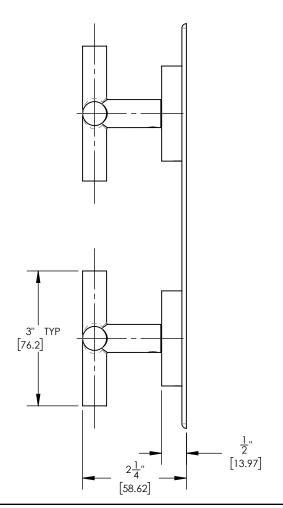

www. phylrich.com

1261 Logan Avenue, Costa Mesa, California 92626.

Phone: 714.361.4800 Fax: 714.617.3120

CODES & STANDARDS

ASME A112.181/ CSA B1251, ASME 112.18.2/ CSA B125.2, ANSI NSF, CEC



4-013




## PRODUCT FEATURES


- Style: Transitional
- Collection: Transition
- Temperature Controlled By Thermostatic

# **TECHNICAL DETAILS**

ADA Compliance: Yes Access Hole: 3" x 8" Number of Handles: 2 Handle Spread: 5" Top Handle Turn Angle: Quarter Turn Bottom Handle Turn Angle: 115° - 118° Installation Type: Wall Mounted Primary Material: Brass Valve Material: Ceramic Flow Restriction: 6.5 gpm Water Pressure Maximum: 85 PSI Water Pressure Minimum: 20 PSI Water Pressure Recommended: 60 PSI

## PRODUCT DIMENSIONS

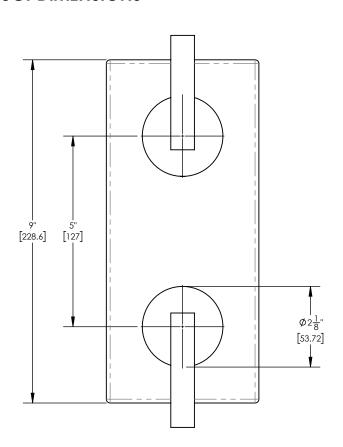

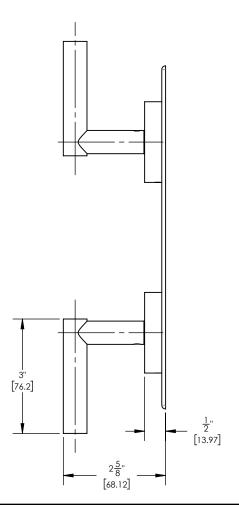

www. phylrich.com

1261 Logan Avenue, Costa Mesa, California 92626.

Phone: 714.361.4800 Fax: 714.617.3120

UPC **CODES & STANDARDS**