

WE RECOMMEND THAT ALL PLUMBING PRODUCTS BE
INSTALLED BY A LICENSED PROFESSIONAL


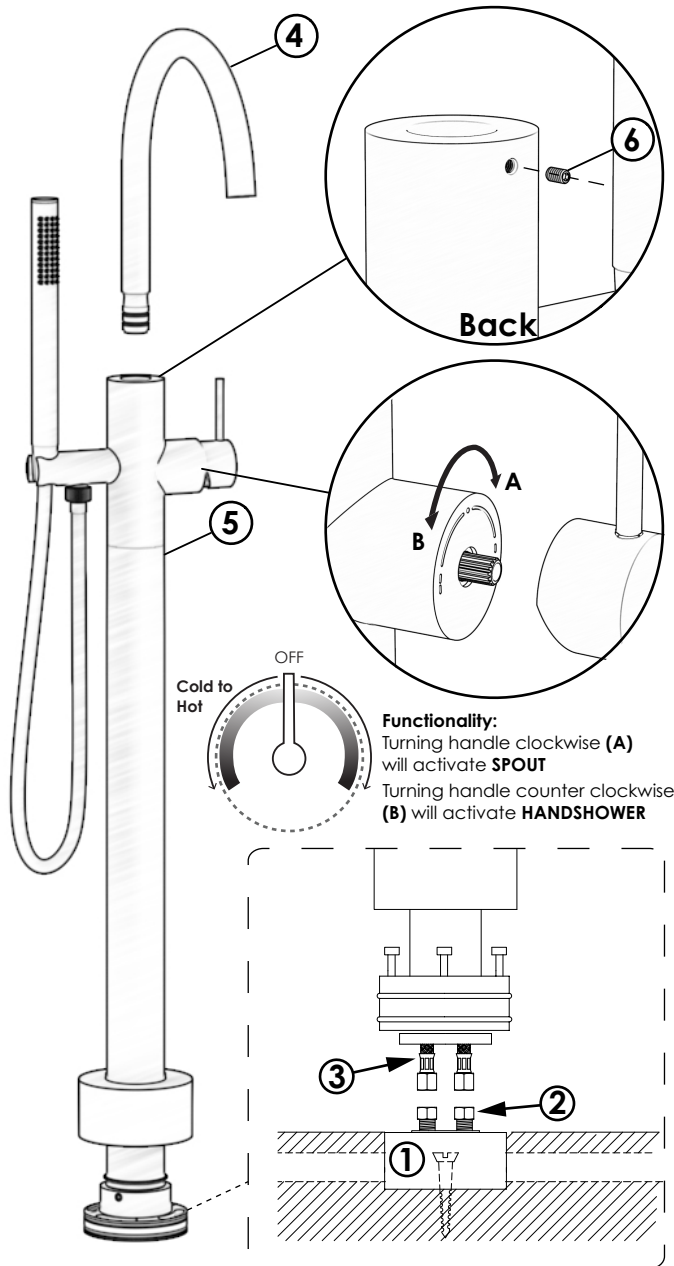


FIG. 1

NOTE: QUICK CONNECT ROUGH-IN VALVE (2-145)
NOT INCLUDED, NEED TO ORDER SEPARATELY

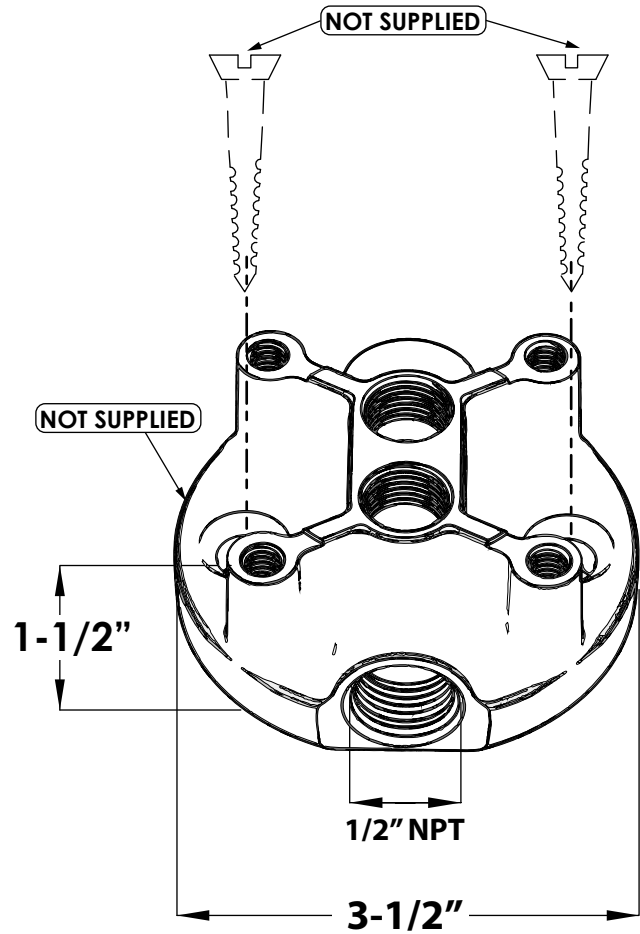

- Place the **QUICK CONNECT CYLINDER (1)** horizontally at the same level as the floor (**SEE LABEL ON QUICK CONNECT FOR FINISHED FLOOR MIN. - MAX LEVELS**)
- Use **screw or anchors** to secure the QUICK CONNECT to the floor as shown in **FIG. 1** (Screws and anchors are not supplied)
- **Take off CAPS (2)** before connecting the **FLEXIBLE HOSES (3)** to the **QUICK CONNECT (1)**
- Connect the SPOUT (4) to the BODY (5) and firmly secure with the supplied SET SCREW (6)

IMPORTANT: Flush supply lines of all debris prior to connecting to faucet valve bodies. Debris remaining in the line will damage valve bodies and cause leaking. Failure to flush the lines could result in VOIDING the warranty