MOEN®

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- High arc spout provides the height and reach to fill or clean large pots
- Flexible supply lines with 3/8" compression fittings
- 125° limited rotation spout
- Faucet designed for handle to be mounted on right side
- OPERATION
- Single handle levers
- Temperature controlled by 100° arc of handle travel

FLOW

- Spout flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi CARTRIDGE
- 1255™ Duralast™ cartridge for Single-Handle

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 🛃 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 years warranty when used in a commercial installation




Genta LX™

Single Handle Limited Rotation Bar Faucet

MODELS: 5882 Series



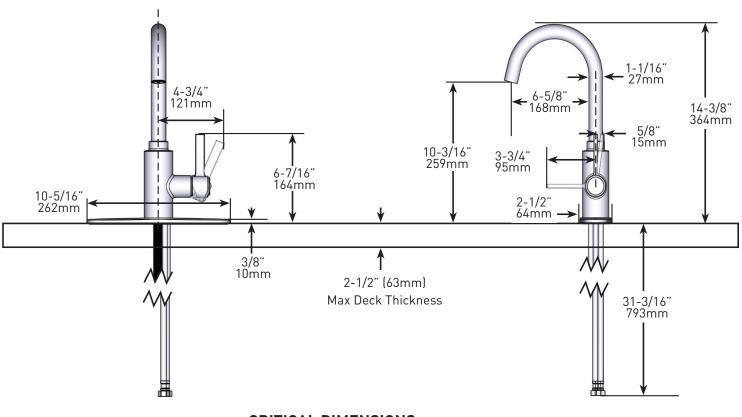

CRITICAL DIMENSIONS DO NOT SCALE

02/10/02/02

SPC23219

00/06/2022 : Released 00