Features


- · Available in 28 finishes including 13 PVD finishes
- · All brass construction
- Max flow rate: 16 gpm (60.6 L/min)
- Includes rough in valves
- 1/4 turn ceramic disc cartridge(s)

Codes/Standards Applicable


Product meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- · Commonwealth of MA
- · ADA compliant
- Local codes may require installation of an upstream tempering valve



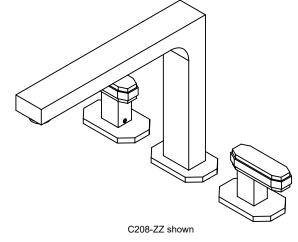



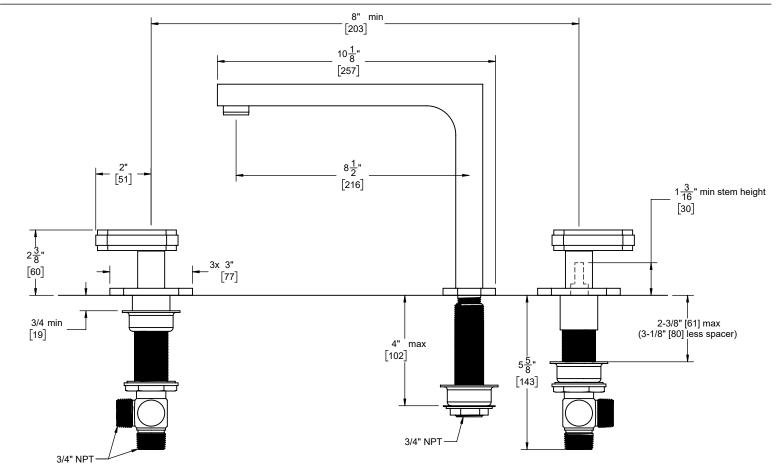



Specifications	subject to	change	without	notice
----------------	------------	--------	---------	--------

<u>Min</u>	Recommended	<u>Max</u>
Spout: Ø1-1/16" [27]	Ø 1-3/8" [35] Ø	1-1/2" [38]
Valve: Ø1-3/8" [35]	Ø1-1/2" [38] Ø	1-1/2" [38]

Through-Hole Specifications

Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]

Roman Tub Set

Features


- Available in 28 finishes including 13 PVD finishes
- All brass construction
- Max flow rate: 16 gpm (60.6 L/min)
- Includes rough in valves
- 1/4 turn ceramic disc cartridge(s)

Codes/Standards Applicable

Product meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- Commonwealth of MA
- Local codes may require installation of an upstream tempering valve




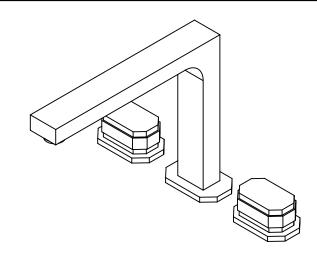



C208B

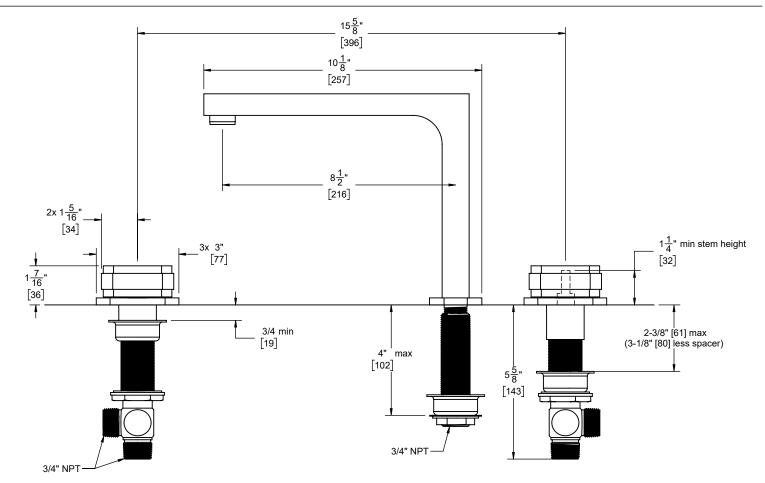



Specifications subject to change without notice

Through-Hole	Specifications
	-

<u>Min</u> Recommended Spout: Ø1-1/16" [27] Ø 1-3/8" [35] Ø 1-1/2" [38] Valve: Ø1-3/8" [35] Ø 1-1/2" [38]

Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]