

# artos<sup>®</sup>

## FS510TK

## INSTALLATION GUIDE

floor mounted tub filler trim  
kit round


BRUSHED NICKEL(BN)



CHROME(CH)



BLACK(BK)



SATIN BRASS (SB)



# artos<sup>®</sup>

## FS510TK

## OPERATING SPECIFICATIONS

floor mounted tub filler trim  
kit round



### FEATURES

Integrated Hand Shower  
Integrated Controls

### OPERATING PRESSURE

Minimum: 15 psi  
Maximum: 75 psi  
Above 90psi it may be necessary to install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW CAPACITY


Tub Filler: 6.0 USGPM  
Hand Shower: 1.8 USGPM

# artos<sup>®</sup>

## FS510TK

## PRODUCT DIMENSIONS

floor mounted tub filler trim  
kit round

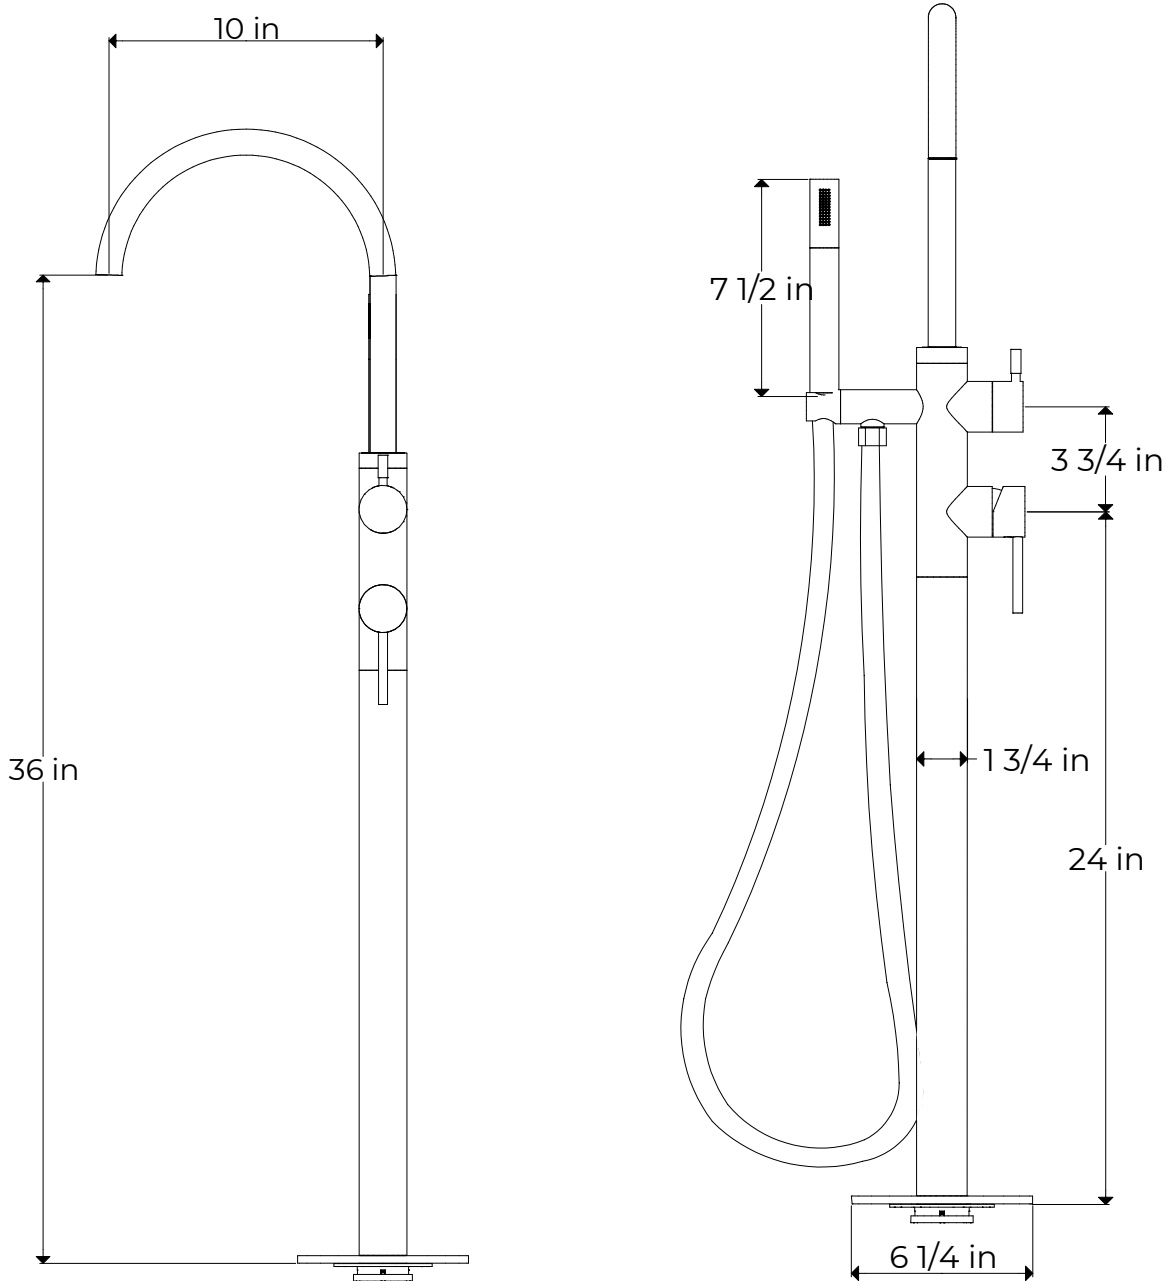


# artos<sup>®</sup>


## FS510TK

floor mounted tub filler trim  
kit round

**STEP 1**

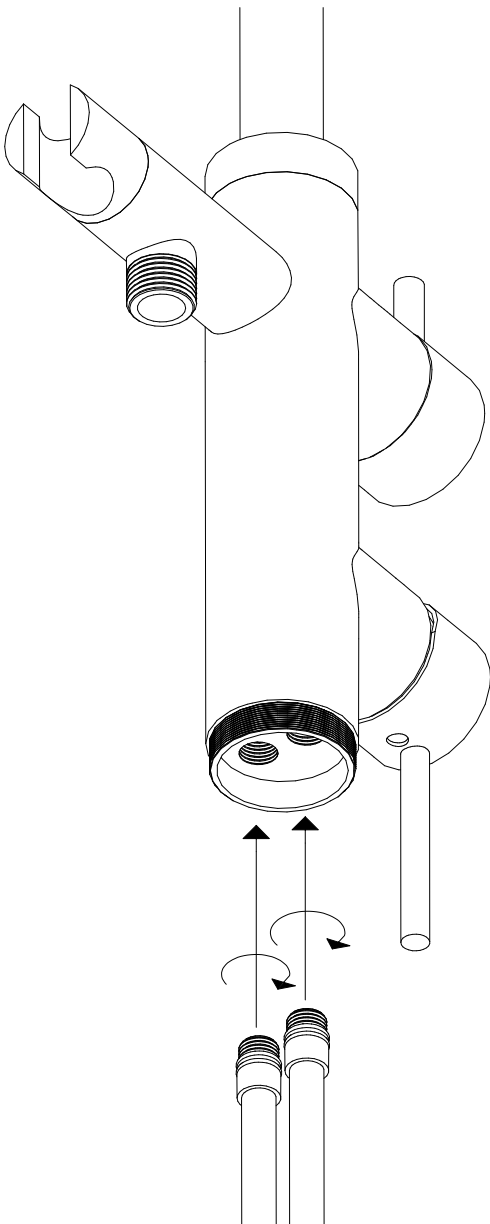


**STEP 2**

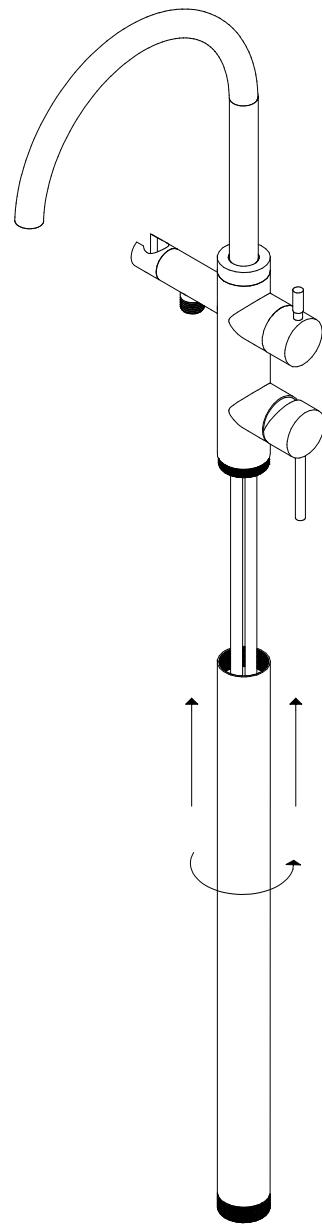


# INSTALLATION STEPS

## STEP 3

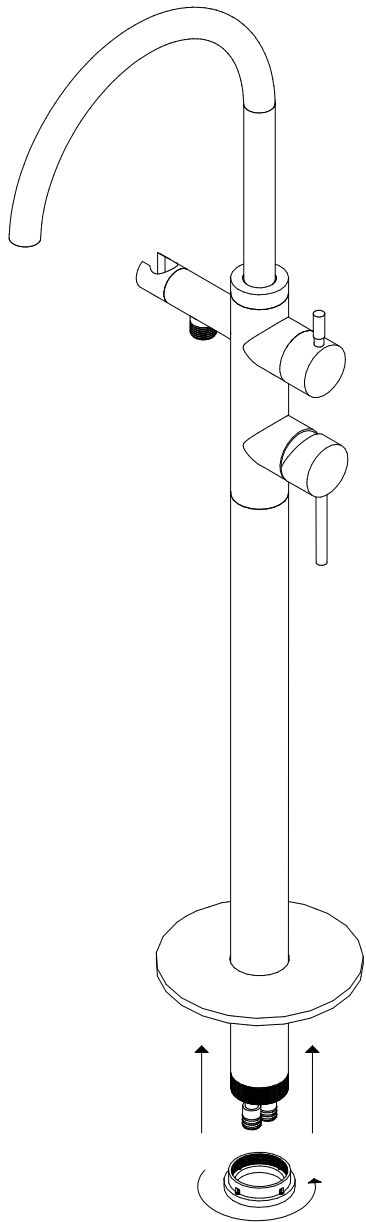

## STEP 4

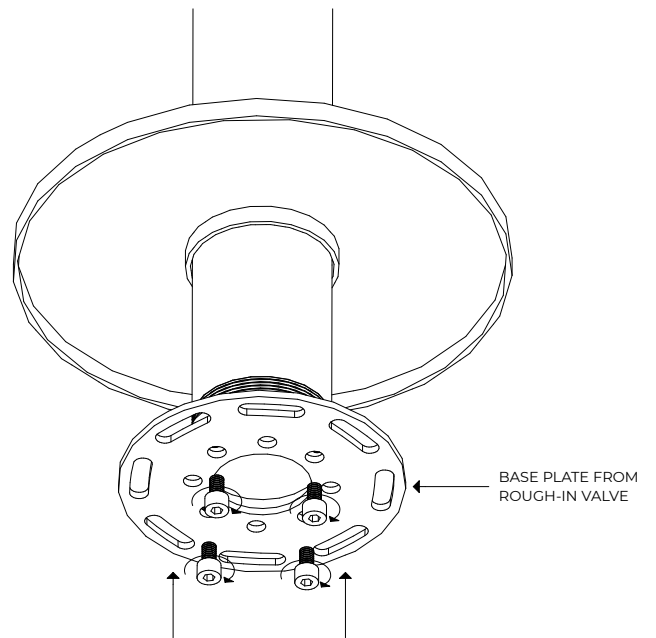


# artos<sup>®</sup>

## FS510TK


## INSTALLATION STEPS

floor mounted tub filler trim  
kit round

### STEP 5

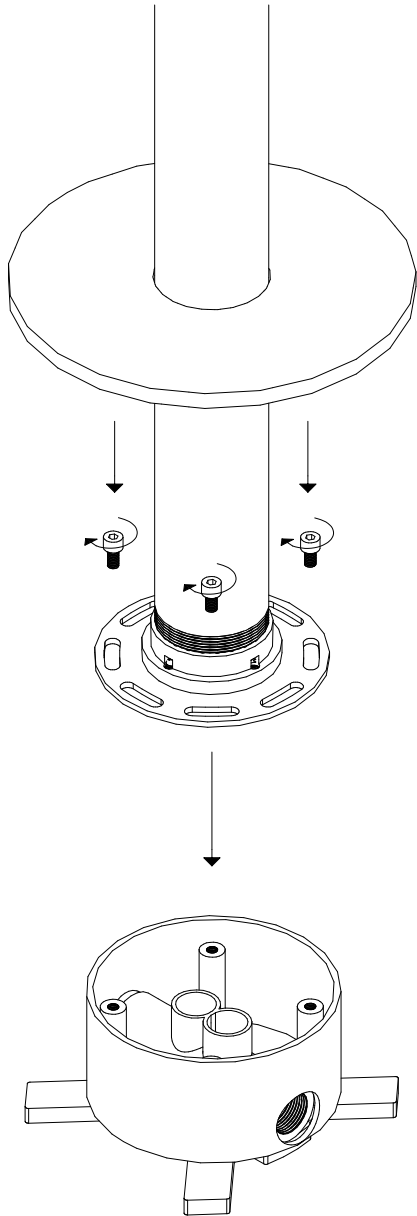

### STEP 6

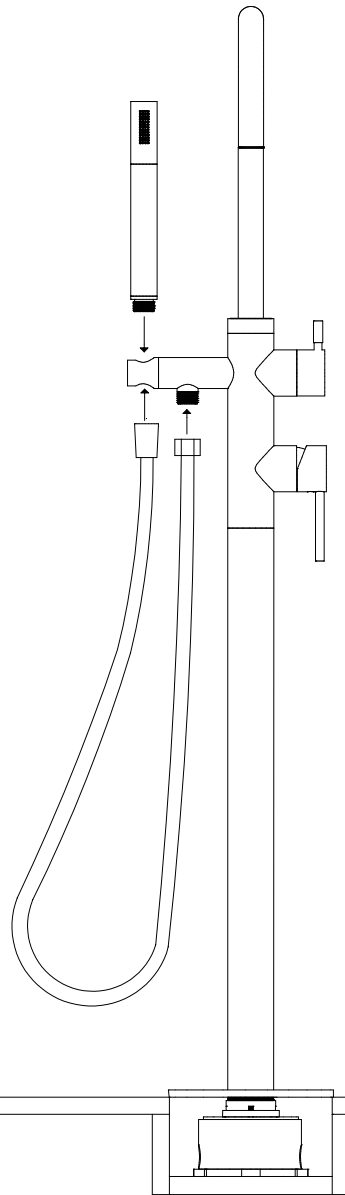

floor mounted tub filler trim  
kit round

