

SPECIFICATIONS

OPULENCE™ TWO HANDLE WIDESPREAD LAVATORY FAUCET

Model

D304057 (Replaces D306457 series)

Description

- Ceramic disc valves
- 10" high swivel spout, 7" spout length, laminar flow
- With drain assembly
- 3 hole mount, 6"-12" installation
- A112.18.1M, 1.5 gpm (5.7 LPM) maximum flow rate @ 20 - 80 psi

Standards



Certified to NSF/ANSI 61
Section 9

- NSF 61-9
- Energy Policy Act of 1992



NSF/ANSI 372

- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372
- CSA B125.1

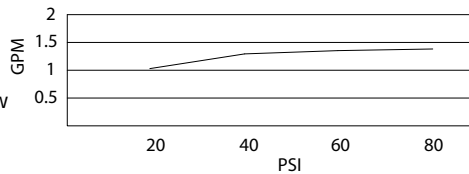


- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

Warranty

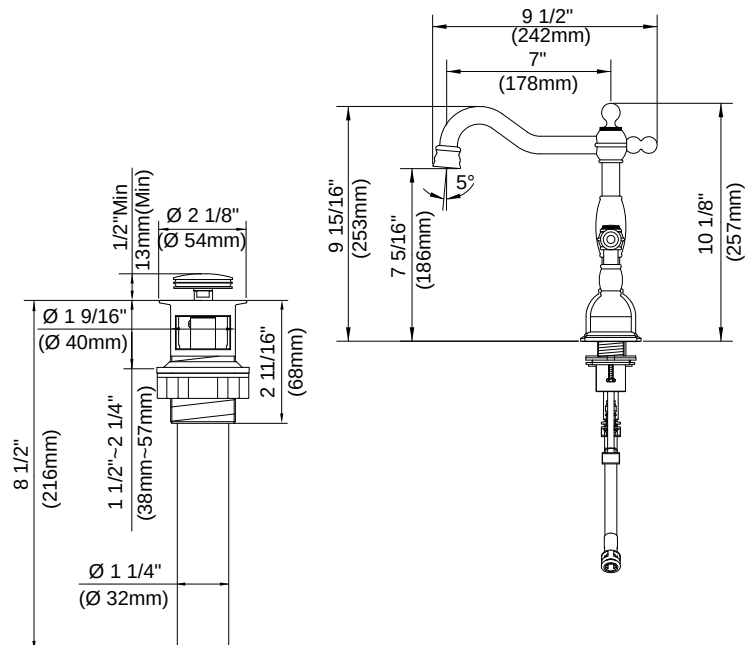
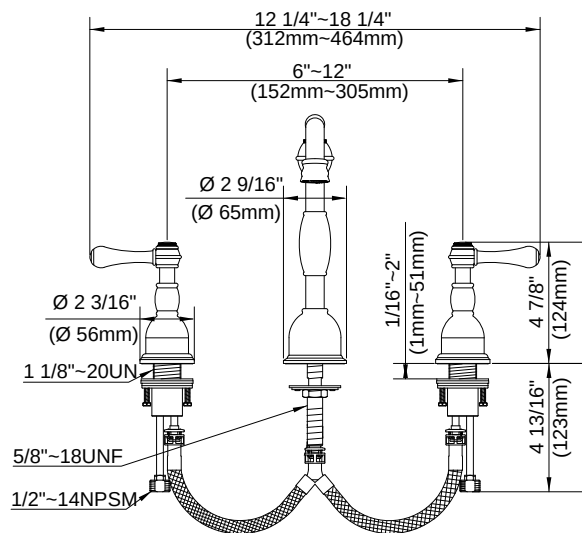
Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Flow Rate



Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

**Submittal Information:**

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____