TOTO<sub>®</sub>

# Carusoe® Close Coupled Toilet, 1.6GPF

### **FEATURES**

- Powerful, quiet flushing system
- Close coupled commercial grade, high performance toilet
- Elongated front bowl and tank set, less seat
- Chrome trip lever
- 12" Rough-in, less supply

#### **MODELS**

- CST716
  - Elongated bowl, 12" rough-in, less seat
- CST716B\*
  - Same as CST716 with bolt down lid (special order)
- CST716D\*
  - Same as CST716 with insulated tank (special order)
- CST716DB\*
  - Same as CST716 with bolt down lid & insulated tank (special order)

### COMPONENTS

- C716
  - Elongated bowl, 12" rough-in
- ST706
  - Tank and Cover only
- ST706B
  - Tank and Cover only, bolt down lid
- ST706D
  - Tank and Cover only, insulated tank
- ST706DB
  - Tank and Cover only, bolt down lid, insulated tank
- SS114 SoftClose® seat (sold separately)

#### COLORS/FINISHES

 Standard #01 Cotton #03 Bone #11 Colonial White

#12 Sedona Beige

## PRODUCT SPECIFICATION

The two-piece gravity fed flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model CST716



### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others



# Carusoe® Close Coupled Toilet, 1.6GPF

### **SPECIFICATIONS**

Water Use
Flush System
Min. Water Pressure
Water Surface
Trap Diameter
Rough-in
Trap Seal
1.6 GPF/6.0LPF
8 psi (static)
8 " x 9-1/2"
1-7/8"
12"
2"

• Warranty One Year Limited Warranty

Material Vitreous china Shipping Weight C716 - 46.5lbs ST706 - 32.5lbs

Shipping Dimensions C716


27-3/4"L x 11-3/8"W1 x 15"W2 x 15-1/8"H


ST706 20-1/8"L x 8-1/4"W x 15-1/2"H

### **INSTALLATION NOTES**

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

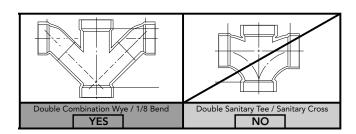

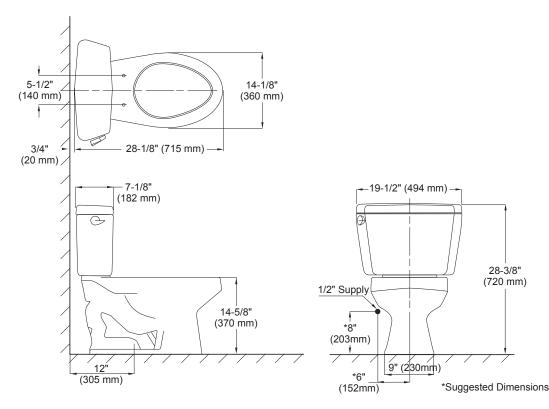



These dimensions and specifications are subject to change without notice