

SPECIFICATIONS

FAIRMONT™ TWO HANDLE WALL MOUNT LAVATORY FAUCET

Model

D316240 (Replaces D316440 series)

Description

- Ceramic disc valve
- 10" spout length
- Metal touch down drain assembly
- 3 hole wall mount

Standards

- UPC/cUPC
- NSF 61-9
- Energy policy act of 1992

MEETS ASME A112.18.1

- ASME A112.18.1



- CSA B125

MEETS CA AB-1953

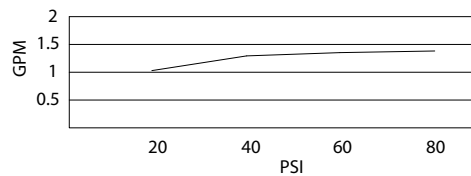
Less than 0.25% lead content



- Meets CA AB-1953
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Flow Rate

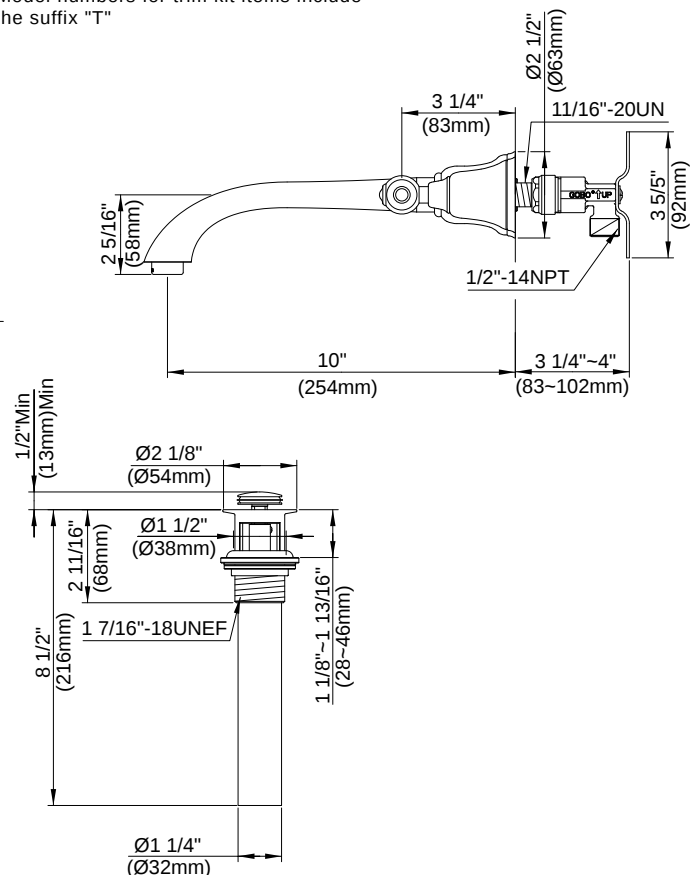
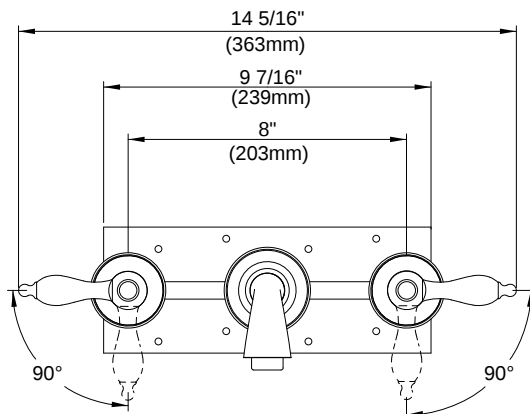
Trim Kits : (for use w/ rough-in valves)
D316240T

Special Packaging

- This product also available with trim and valve packaged separately.
- Use with rough-in valve D106800BT: Combination 1/2" copper sweat/IPS connection
- Model numbers for trim kit items include the suffix "T"

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

**Submittal Information:**

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____