

# **SPECIFICATIONS**

## TWO HANDLE THERMOSTATIC SHOWER VALVE WITH TRIM

### **Description**

- 1/2" combination IPS/Copper sweat on all three ports
- 3-port shower valve with stops
- With temperature limit adjustment

#### Flow & Valving

See Chart

#### **Standards**

- ASME A112.18.1
- CSA B125
- ASSE 1016
- Listed IAPMO/UPC
- Energy policy act of 1992
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms &

#### Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



D560140 FAIRMONT™

# ChromeBrushed Nickel (BN)Distressed Nickel (DN)

**Available Colors & Finish** 


Distressed Nickel (DNOil Rub Bronze (RB)

#### Trim Kit:


(for use w/thermostatic shower valve) D560140T


#### **Special Packaging**

 Model numbers for trim kit items include the suffix "T".



بغ

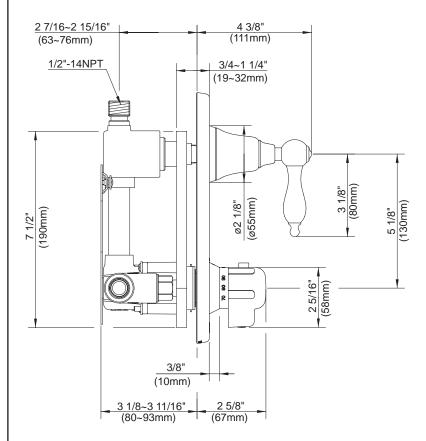

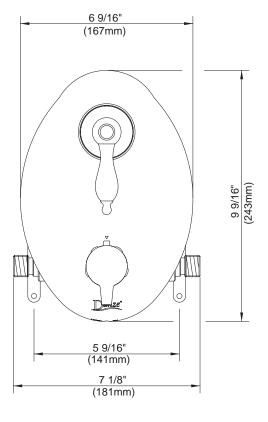

Specific Features: \_

Submitted Model No.: \_

SD560140/12-07.01