

<u>Belmont</u>™

SINGLE HOLE LAVATORY FAUCET

Features


Over 28 finishes including 13 PVD Finishes

- All brass construction
- 4-9/16" spout center to center
- Single handle operation cartridge with ceramic disc
- Flexible braided hoses for ease of installation
- ∅ 1-1/4" all brass touch style pop up drain assembly
- 1.2 gpm (4.5 L/min) max flow rate

Codes/Standards

Proudct meets or exceeds the following:

- ASME A112.18.1/CSA B125.1 NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- Commonwealth of MA
- EPA WaterSense High Efficiency Lavatory
- ADA compliant







3501-1



3501-1-HXX (XX = Optional Series Handle)

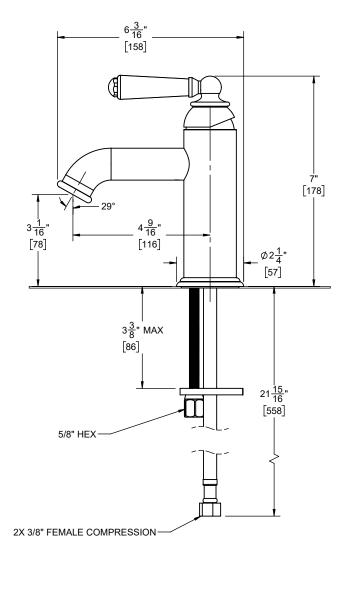




THROUGH-HOLE SPECIFICATIONS

<u>MIN</u> RECOMMENDED SPOUT: DRAIN: Ø 1-1/4" [32] Ø 1-1/2" [38] Ø 1-3/8" [35] Ø 1-3/4" [44]

DIMENSIONS SHOWN TO THE NEAREST 1/16" [DIMENSIONS SHOWN TO THE NEAREST 1mm]



SINGLE HOLE LAVATORY FAUCET

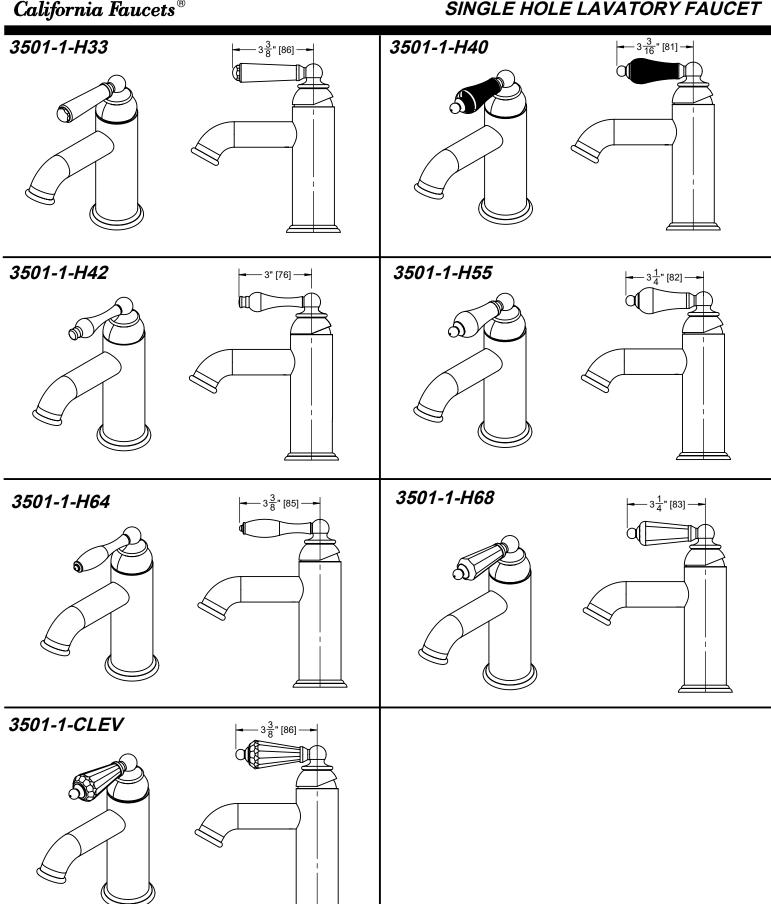

Dimensions Shown to Nearest 1/16" [Dimensions Shown to Nearest 1mm]