




### CF-4702

#### Features


- 5-7/16" spout center to center
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- $\phi$  1-1/4" all brass lift rod style pop up drain assembly
- 1.2 gpm (4.5 L/min) max flow rate
- Solid brass construction
- Over 30 finishes including 15 PVD finishes



#### Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC

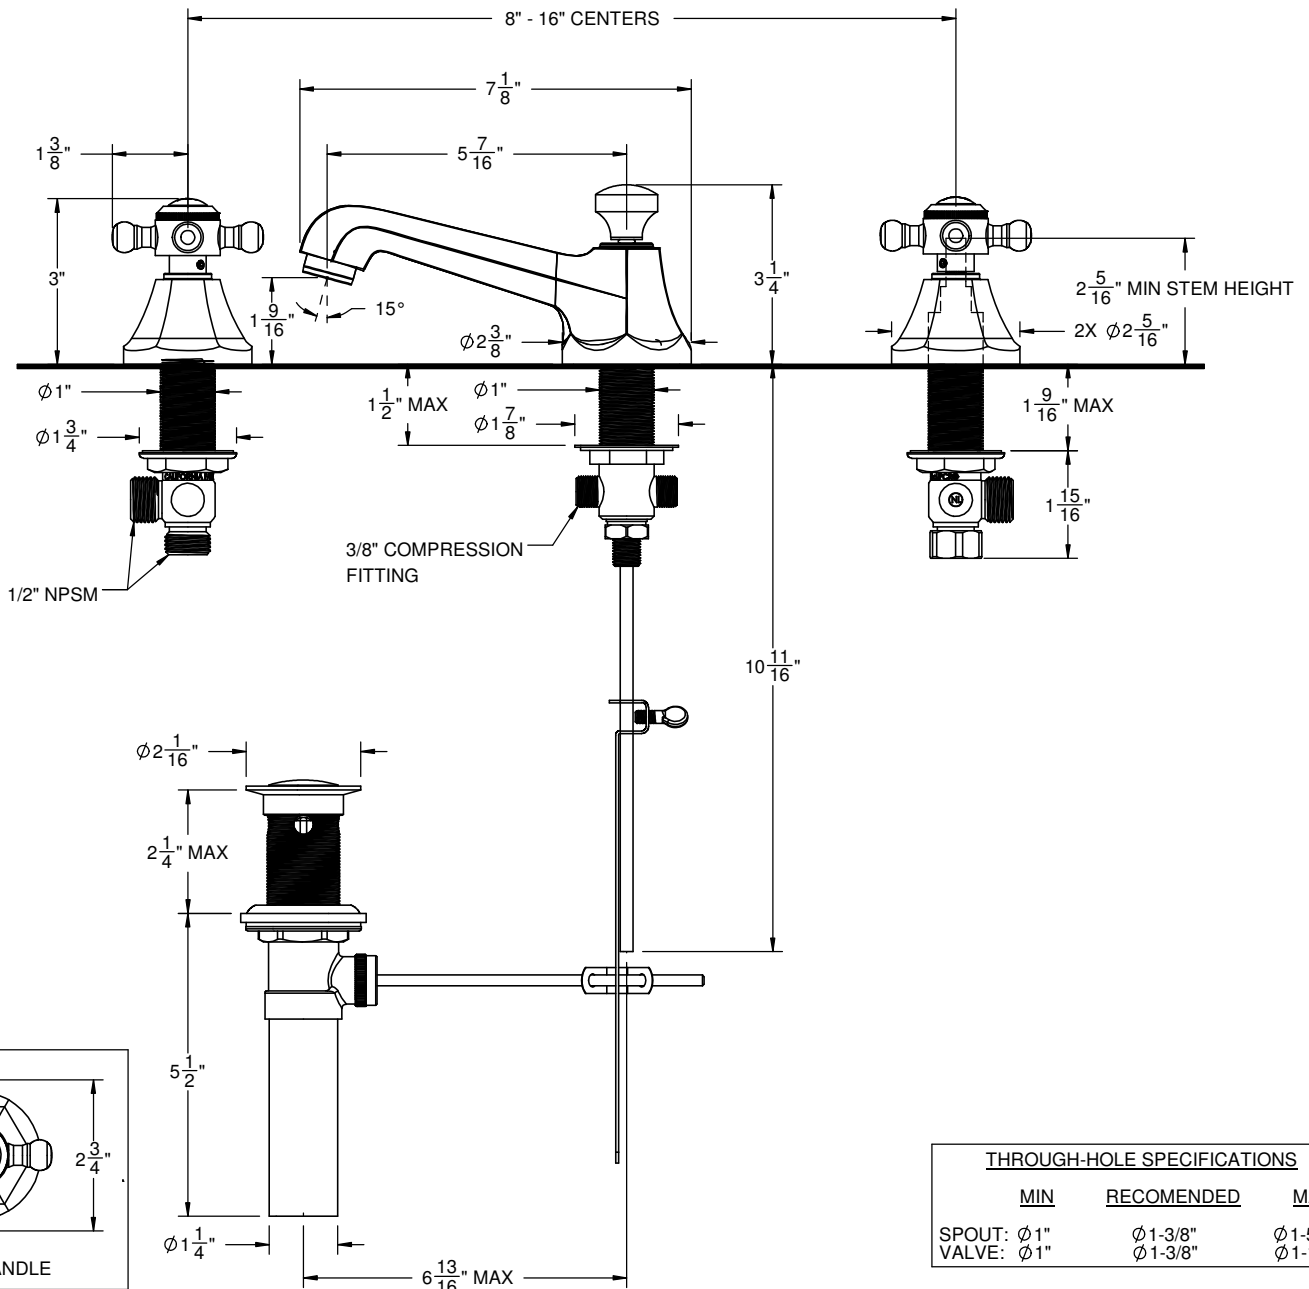

ALL DIMENSIONS SHOWN TO NEAREST 1/16"



California Faucets®


# ZeroDrain®

## LAVATORY DRAIN


### 9050Z

#### Features

- Stopper is flush with flange in open position
- Easy installation and maintenance of stopper
- For use on sinks with overflow or less overflow
- Polished and finished upper flange and stopper only
- Connection: 1-1/4" x 4" tailpiece (7" version, 9069, sold separately)
- US Patented design No. 915102
- Solid brass construction
- Over 30 finishes including 15 PVD finishes

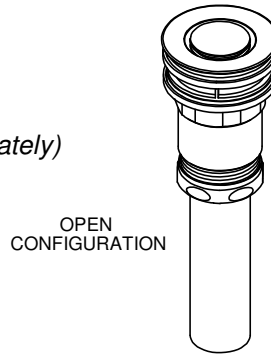

OPEN CONFIGURATION

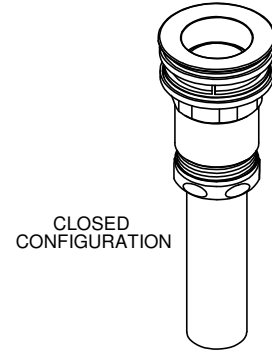

CLOSED CONFIGURATION




#### Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.2/CSA B125.2

#### THICK SINK APPLICATION (5/8" - 2")

#### THIN SINK APPLICATION (1/16" - 9/16") SHOWN WITH OPTIONAL 9050Z-TSS

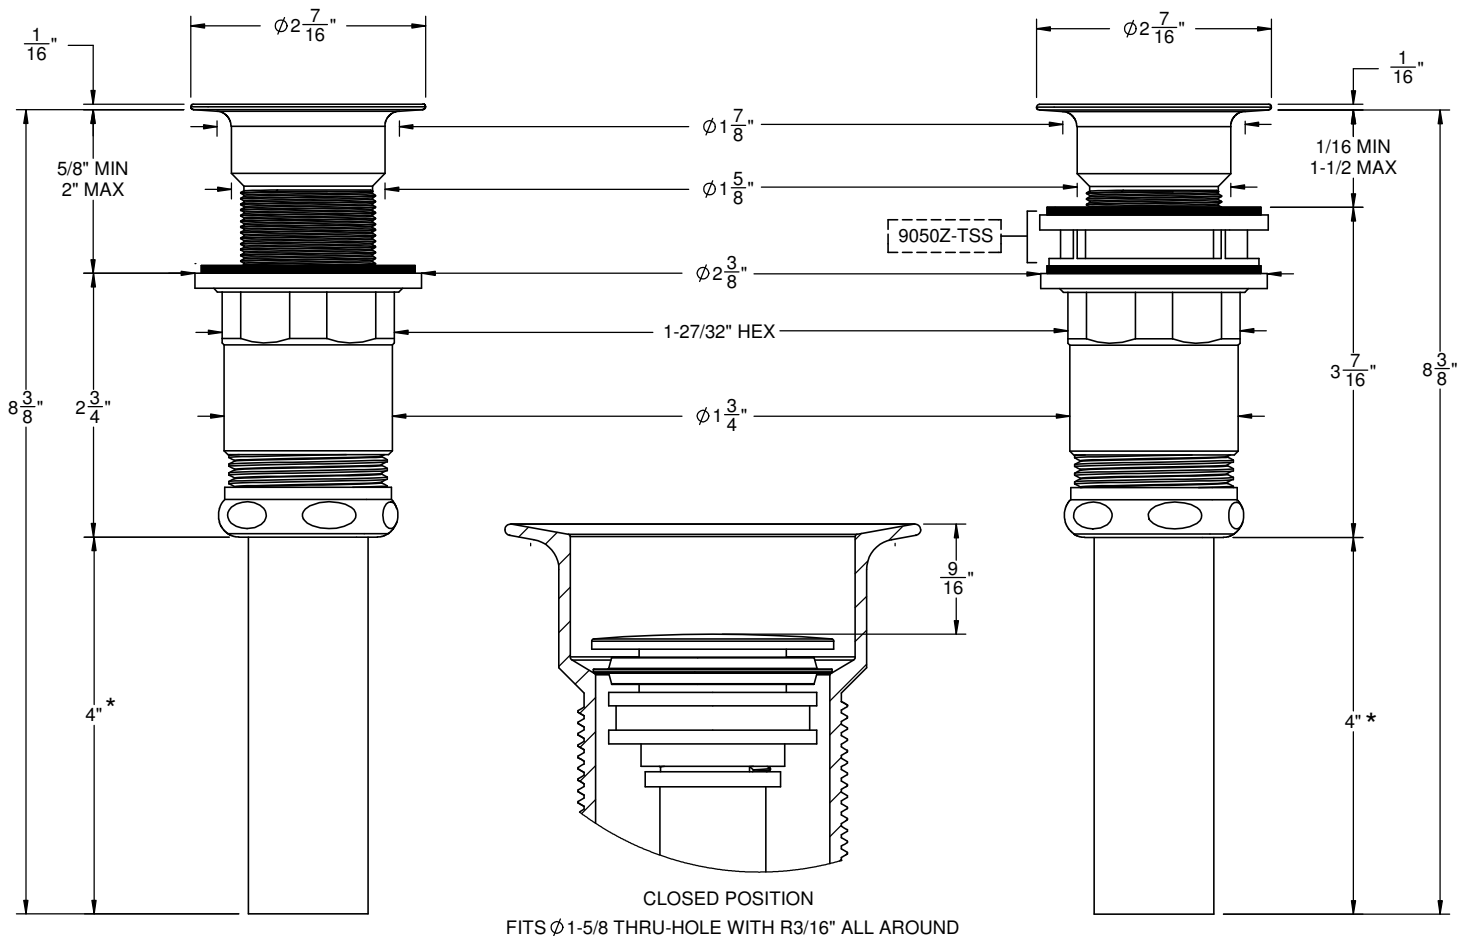

\* TAILPIECE MAY BE CUT TO 1" MIN

ALL DIMENSIONS SHOWN TO NEAREST 1/16"