

SPECIFICATIONS

TOPANGA™ 3 ½" SHOWERHEAD

Model

D460043

Description

- Pressure Manifold™ & Air Injection Technology
- Brass ball joint with polymer shell
- Optimizes water intensity even at low pressures
- With 40 easy clean jets
- Maximum flow rate 2.0 gpm @ 80 psi
- Uses 20% less water than a standard showerhead flowing at 2.5 gpm

Standards



- UPC/cUPC
- Energy policy act of 1992

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.


Flow Rate 2.5 M d 1.5 0.5 20 40 60 80 PSI





Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

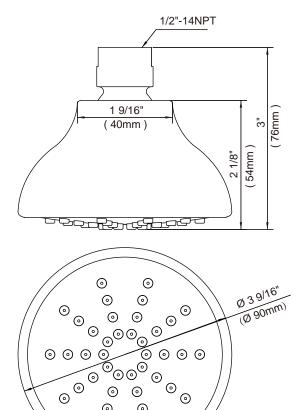

Submittal Information:	
Job Name:	Location:
Contractor:	Contact #:

0

0

0

0