

SERENITY 9 – SERENITY SERIES

inches (mm)

74 x 44 ½ x 23 ½ (1880 x 1130 x 595) • Fax on Demand #1188

SOAKER MODEL #AI9AIR7444TO

AIR BATH MODEL #AI9AIR7444

HOTSOAK MODEL #AI9AIR7444HS



FEATURES

- Deep bathing well
- Slip-resistant floor
- Pre-leveled ABS support base
- Lucite® cast acrylic surface
- Design styles from transitional to modern
- Limited lifetime warranty
- UL and IAPMO listed

OPTIONS

- Studio Lights Package: 4 high-intensity LEDs, contemporary keypad (air baths)
- Comfort pillow: Biscuit, Black, White
- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Optional blower/pump location
- Remote control kit (Air bath only)
- Remote blower wiring kit (Air bath only)
- 1" Low Profile Deck (Skirt option not available with Low Profile Deck)

AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

COLOR & TRIM OPTIONS

| Stock | Premium |
|---------|-----------------|
| Almond | Black |
| Bone | Cashmere |
| Biscuit | Mexican Sand |
| White | Red |
| | Sandbar |
| | Sterling Silver |

AVAILABLE SYSTEMS

AIR BATH

- Perimeter air channel lined with antimicrobial coating
- Variable-speed, heated-air blower and automated purge-and-dry cycle and water sensors
- Electronic control with wave and pulse features
- Chromatherapy
- Factory run-tested

HOTSOAK

- 2 low-profile circulation portals
- 1.5kW inline maintenance heater
- Quiet, run-dry safe pump
- Electronic one-touch off/on control
- Quiet pad anti-vibration pump mount
- Heatbent rigid PVC piping
- Factory run-tested





AQUATIC
Where Inspiration Takes Shape

SERENITY 9

 74 x 44 1/2 x 23 1/2 (1880 x 1130 x 595)
 inches (mm)


Note: Drop-in Serenity models feature a Pre-leveled ABS Support Base.

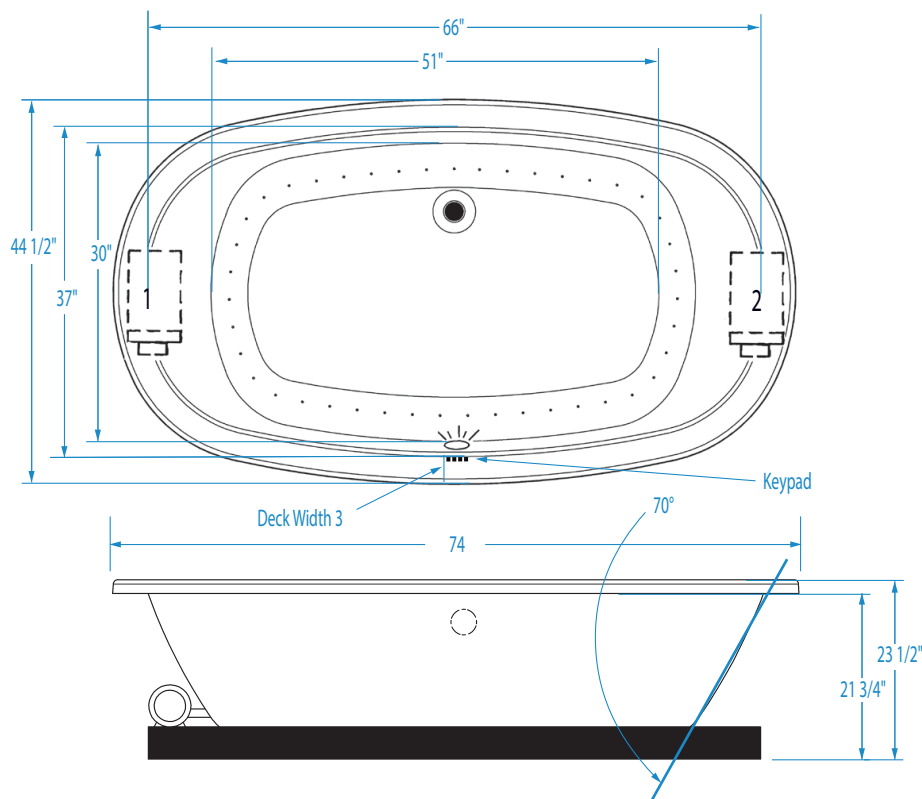
FEATURES lbs (kg) Dimensional Tolerance $\pm 3/8"$. Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

| Type and Model # | Material | System | Powered By | Heater | Controls | Drain | Pkg. Wt. |
|-----------------------|----------|-------------------|-----------------------|---------------------------|------------|--------------|----------|
| Soaker #AI9AIR7444TO | Acrylic | - | - | - | - | Center Front | 170 (77) |
| HotSoak #AI9AIR7444HS | Acrylic | Water circulation | Pump | 1.5 kW Inline maintenance | Electronic | Center Front | 200 (91) |
| Air Bath #AI9AIR7444 | Acrylic | Air channel | Variable speed blower | Integrated | Electronic | Center Front | 200 (91) |

DIMENSIONS inches (mm)

| Width Overall / Net | Depth Overall / Net | Height Overall / Net | Skirt Height |
|------------------------|------------------------|-------------------------|-----------------|
| 74 (1880) | 44 1/2 (1130) | 23 1/2 (595) | - |

SUMP DATA inches (mm)

| Capacity to Overflow gal (ltr) | Min. Operating Capacity gal (ltr) | WIDTH @ centerline | | DEPTH @ centerline | |
|--------------------------------------|---|--------------------|-----------|--------------------|----------|
| | | Top | Bottom | Top | Bottom |
| 128 (485) | - | 66 (1675) | 51 (1295) | 37 (940) | 30 (760) |

PLUMBING DIMENSIONS inches (mm)

| A | B | Drain Diameter / Clearance |
|------------|----------|-------------------------------|
| 2 1/2 (65) | 13 (330) | |

ELECTRICAL DATA

| Component | Specification | Requirement |
|--------------------------|-------------------------|--|
| Heated Blower (Air Bath) | 10.5 AMP; 120V | 15 AMP; 120V, separate circuit; Class A GFCI |
| Pump (HotSoak) | 1/1.5 HP; 1.3 AMP; 120V | 20 AMP; 120V, separate circuit; Class A GFCI |
| Heater (HotSoak) | 1.5 kW; 12 AMP; 120V | |

NOTES:

- Where applicable, utilize cut-out templates packed with unit for deck cutouts.
- 16 x 16 (405 x 405) minimum access required at pump/blower location(s).
- For Low Profile Deck, framing height will need to be increased by an additional 1".
- If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.

SERENITY


PUMP/BLOWER LOCATIONS

TECHNICAL SPECIFICATIONS


Air Bath • HotSoak • DriftBath

AIR BATH

Center Drain Models




End Drain Models




HOTSOAK

Center Drain Models




End Drain Models




DRIFTBATH

Center Drain Models



End Drain Models



Center Drain Models

