

SERENITY 48 – SERENITY SERIES

inches (mm)

60 x 30 x 22 ¾ (1525 x 760 x 575) • Fax on Demand #9063

SOAKER MODEL #AI48AIR6030TO

AIR BATH MODEL #AI48AIR6030 (Coming Soon)

HOTSOAK MODEL #AI48AIR6030HS

DRIFTBATH MODEL #AI48AIR6030DB



FEATURES

- Deep bathing well
- Slip-resistant floor
- Extended skirt (AFR)
- Integral tile flange
- Lucite® cast acrylic surface
- Design styles from transitional to modern
- Limited lifetime warranty
- UL and IAPMO listed

OPTIONS

- Comfort pillow: Biscuit, Black, White
- Bolt-on grab bar(s): Chrome, Oil-Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, White)
- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Cut skirt (19")
- Remote control kit (air bath only)
- Remote blower wiring kit (air bath only)

AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

COLOR & TRIM OPTIONS

Stock	Premium
Almond	Black
Bone	Cashmere
Biscuit	Mexican Sand
White	Red
	Sandbar
	Sterling Silver

AVAILABLE SYSTEMS

HOTSOAK

- 2 low-profile circulation portals
- 1.5kW inline maintenance heater
- Quiet, run-dry safe pump
- Electronic one-touch off/on control
- Quiet pad anti-vibration pump mount
- Heatbent rigid PVC piping
- Factory run-tested

DRIFTBATH

- Up to 70 water-only portals
- Quiet 3/4 hp pump with integrated heat
- Electronic control
- 4 high-intensity LED chromatherapy lights
- Available in White or Biscuit




SERENITY 48

60 x 30 x 22 3/4 (1525 x 760 x 575) inches (mm)



Note: Drop-in Serenity models feature a Pre-leveled ABS Support Base.

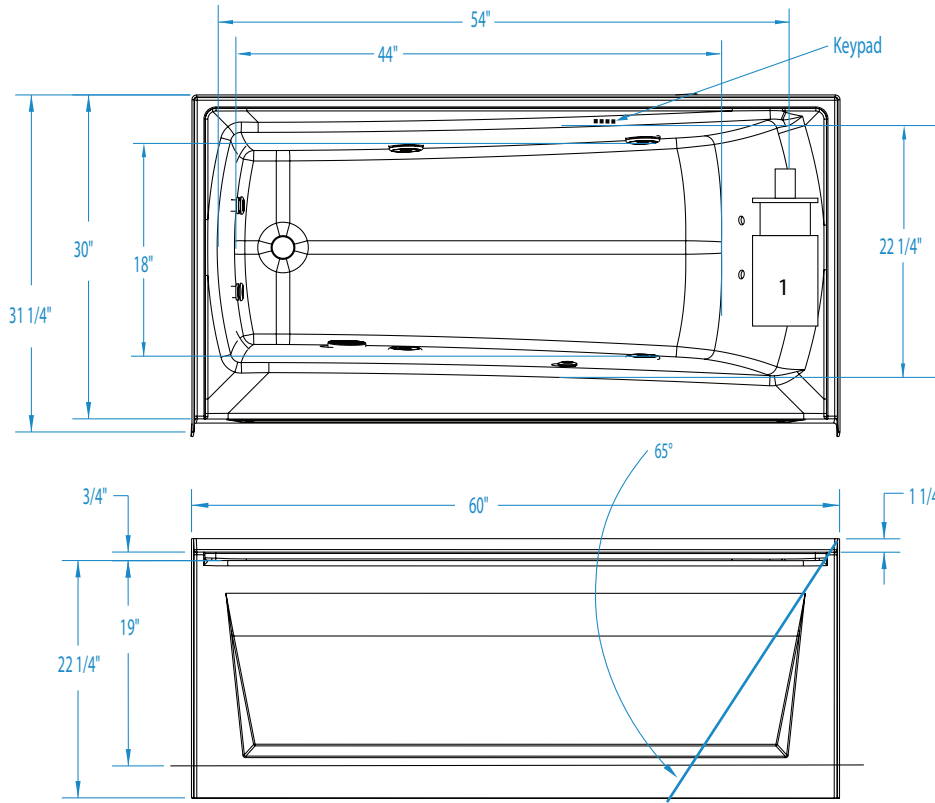

FEATURES lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt.
Soaker #AI48AIR6030TO	Acrylic	-	-	-	-	LH or RH	113 (52)
Hotsoak #AI48AIR6030HS	Acrylic	Water circulation	Pump	1.5 kW Inline maintenance	Electronic	LH or RH	143 (64)
DriftBath #AI48AIR6030DB	Acrylic	Water circulation	Pump	Integrated	Electronic	LH or RH	154 (70)

DIMENSIONS inches (mm)

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
60 (1525)	31 1/4 (795) / 30 (760)	24 1/4 (615) / 22 3/4 (575)	22 (560)

SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
56 (212)	31 (117)	54 (1370)	44 (1120)	22 1/4 (570)	18 (460)

PLUMBING DIMENSIONS inches (mm)

A	B	Drain to Overflow	Drain Diameter / Clearance
2 (50)	8 3/4 (220)	14 3/4 (375)	2 (50) / 3 1/4 (80)

ELECTRICAL DATA

Component	Specification	Requirement
Pump (HotSoak)	1/15 HP; 1.3 AMP; 120V	20 AMP; 120V, separate circuit; Class A GFCI
Heater (HotSoak)	1.5 kW; 12 AMP; 120V	
Pump (DriftBath)	3/4 HP; 8.8 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI


NOTES:

- 1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.
- 2) 16 x 16 (405 x 405) minimum access required at pump/blower location(s).
- 3) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.

AIR BATH

Center Drain Models




End Drain Models




HOTSOAK

Center Drain Models




End Drain Models



DRIFTBATH

Center Drain Models



End Drain Models



Center Drain Models

