# AZRA II - BUILDERS' CHOICE

72 x 42 x 23 (1830 x 1065 x 585) • Fax on Demand #5046

SOAKER MODEL #6072620 WHIRLPOOL MODEL #6072621



# AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet

- Centralized customer service
- Field support
- 24-hour fax-on-demand

## FEATURES (ALL MODELS)

- Slip-resistant floor
- Pre-leveled base
- Lucite® cast acrylic surface
- Limited 10- year warranty
- UL and IAPMO listed

## **OPTIONS**

- Comfort pillow: Biscuit, Black, White
- 1.5kW inline maintenance heater (whirlpool only)
- Bolt-on grab bar(s):
   Chrome, Oil-Rubbed Bronze,
   Polished Brass, Brushed Nickel,
   Color Matched (Biscuit, White)
- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Lift & turn waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel
- Optional pump location

#### **COLOR & TRIM OPTIONS**

Stock

Almond (C) Bone (C)

Biscuit (C) White (C)

C = Color Matched Trim

# **AVAILABLE SYSTEM**

### WHIRLPOOL

- 8 whirlpool hydrotherapy jets including:
  - High-flow directional jets
  - Low-profile spinning micro-jets
  - .75 hp pump
  - Pneumatic on/off control
  - Advanced safety suction system
  - Factory run-tested












AQUATIC
Where Inspiration Takes Shape


Builders' Choice Series • Fax on Demand #5046


# AZRA II

 $72\times42\times23~\text{(1830}\times\text{1065}\times585\text{)}$  inches (mm)



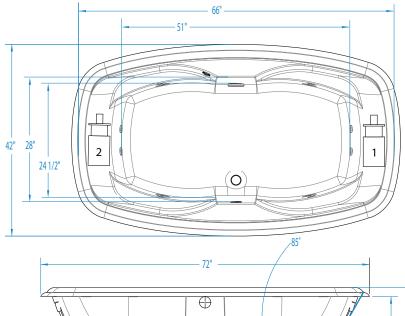

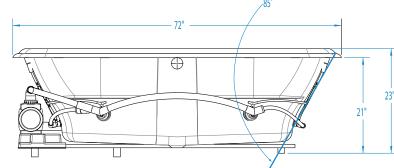



FEATURES lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

| Type and Model #   | Material | Jets | Pump    | Air System | Heater                     | Controls  | Drain        | Pkg. Wt. |
|--------------------|----------|------|---------|------------|----------------------------|-----------|--------------|----------|
| Soaker #6072620    | Acrylic  | 0    | -       | -          | -                          | -         | Center Front | 127 (58) |
| Whirlpool #6072621 | Acrylic  | 8    | 0.75 HP | _          | 1.5kW inline<br>(optional) | Pneumatic | Center Front | 177 (80) |

### DIMENSIONS inches (mm)

| Width         | <b>Depth</b>  | <b>Height</b>         | Skirt  |
|---------------|---------------|-----------------------|--------|
| Overall / Net | Overall / Net | Overall / Net         | Height |
| 72 (1830)     | 42 (1065)     | 23 (585)/<br>21 (533) | -      |

### SUMP DATA inches (mm)

| Capacity to<br>Overflow | Min. Operating Capacity gal (ltr) | WIDTH @ centerline |           | DEPTH @ centerline |            |
|-------------------------|-----------------------------------|--------------------|-----------|--------------------|------------|
| gal (ltr)               |                                   | Тор                | Bottom    | Тор                | Bottom     |
| 72 (273)                | 47 (178)                          | 66 (1675)          | 51 (1295) | 28 (710)           | 24 ½ (620) |

### PLUMBING DIMENSIONS inches (mm)

| Α           | В            | Drain<br>to Overflow | Drain<br>Diameter / Clearance |  |
|-------------|--------------|----------------------|-------------------------------|--|
| 6 1/4 (160) | 10 3/4 (275) | 17 (430)             | 2 (50) / 1 1/4 (30)           |  |

#### NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2)  $16 \times 16 (405 \times 405)$  minimum access required at pump/blower location(s).

## ELECTRICAL DATA

| Component                            | Specification        | Requirement                                     |
|--------------------------------------|----------------------|---|
| Pump                                 | .75 HP; 5 AMP; 120 V | 15 AMP; 120V, separate circuit;<br>Class A GFCI |
| Optional Heater<br>(whirlpool model) | 1.5KW; 12 AMP; 120 V | 15 AMP; 120V, separate circuit;<br>Class A GFCI |